

UT360X06Fx60

SINGLE BAND | OMNI | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)

Features

- Omni configuration with 2 connectors
- Ideal for Small Cell / DAS applications
- Available with 7/16-DIN connectors
- Four unique mounting options
- Available in gray and brown



Connector Description

The antenna has 2 connectors located at the bottom.

High Band ■ Y1 1695-2700 MHz (2x) 7/16-DIN Female

Electrical Characteristics	High Band ■ Y1			
Frequency Bands	1695-2700 MHz			
	1695-1880 MHz	1850-1990 MHz	1920-2180 MHz	2200-2700 MHz
Polarization	±45°			
Horizontal Beamwidth	360°	360°	360°	360°
Vertical Beamwidth	22°	20°	18°	18°
Gain	6.2 dBi	6.7 dBi	7.0 dBi	7.0 dBi
Electrical Downtilt (°)	(x) 0, 2			
Impedance	50Ω			
VSWR	< 1.5:1			
Upper Sidelobe Suppression	> 16 dB			
Isolation Between Ports	20 dB			
IM3 (2x20W carrier)	< -150 dBc			
Input Power	(2x) 300 W			
Diplexed	No			
Number of Sectors, Sector Spacing and/or Pattern Shape	Omni			
Operating Temperature	-40° to +60° C (-40° to +140° F)			
Lightning Protection	Direct Ground			

Mechanical Characteristics

Antenna Dimensions (Height x Diameter)	610 x 191 mm	24.0 x 7.5 in
Weight without Mounting Bracket Kit	5.9 kg	13 lbs
Antenna Volume	0.02 m ³	0.6 ft ³
Survival Wind Speed	200 km/hr	125 mph
Wind Area	0.12 m ²	1.25 ft ²
Wind Load (160 km/hr or 100 mph)	62 N	13.7 lbf

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

UT360X06Fx60

SINGLE BAND | OMNI | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)

Bottom View - Labeling


**NO
IMAGE
AVAILABLE**

**COMING
SOON**

UT360X06Fx60

SINGLE BAND | OMNI | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)

Bottom View - Connector Diagram



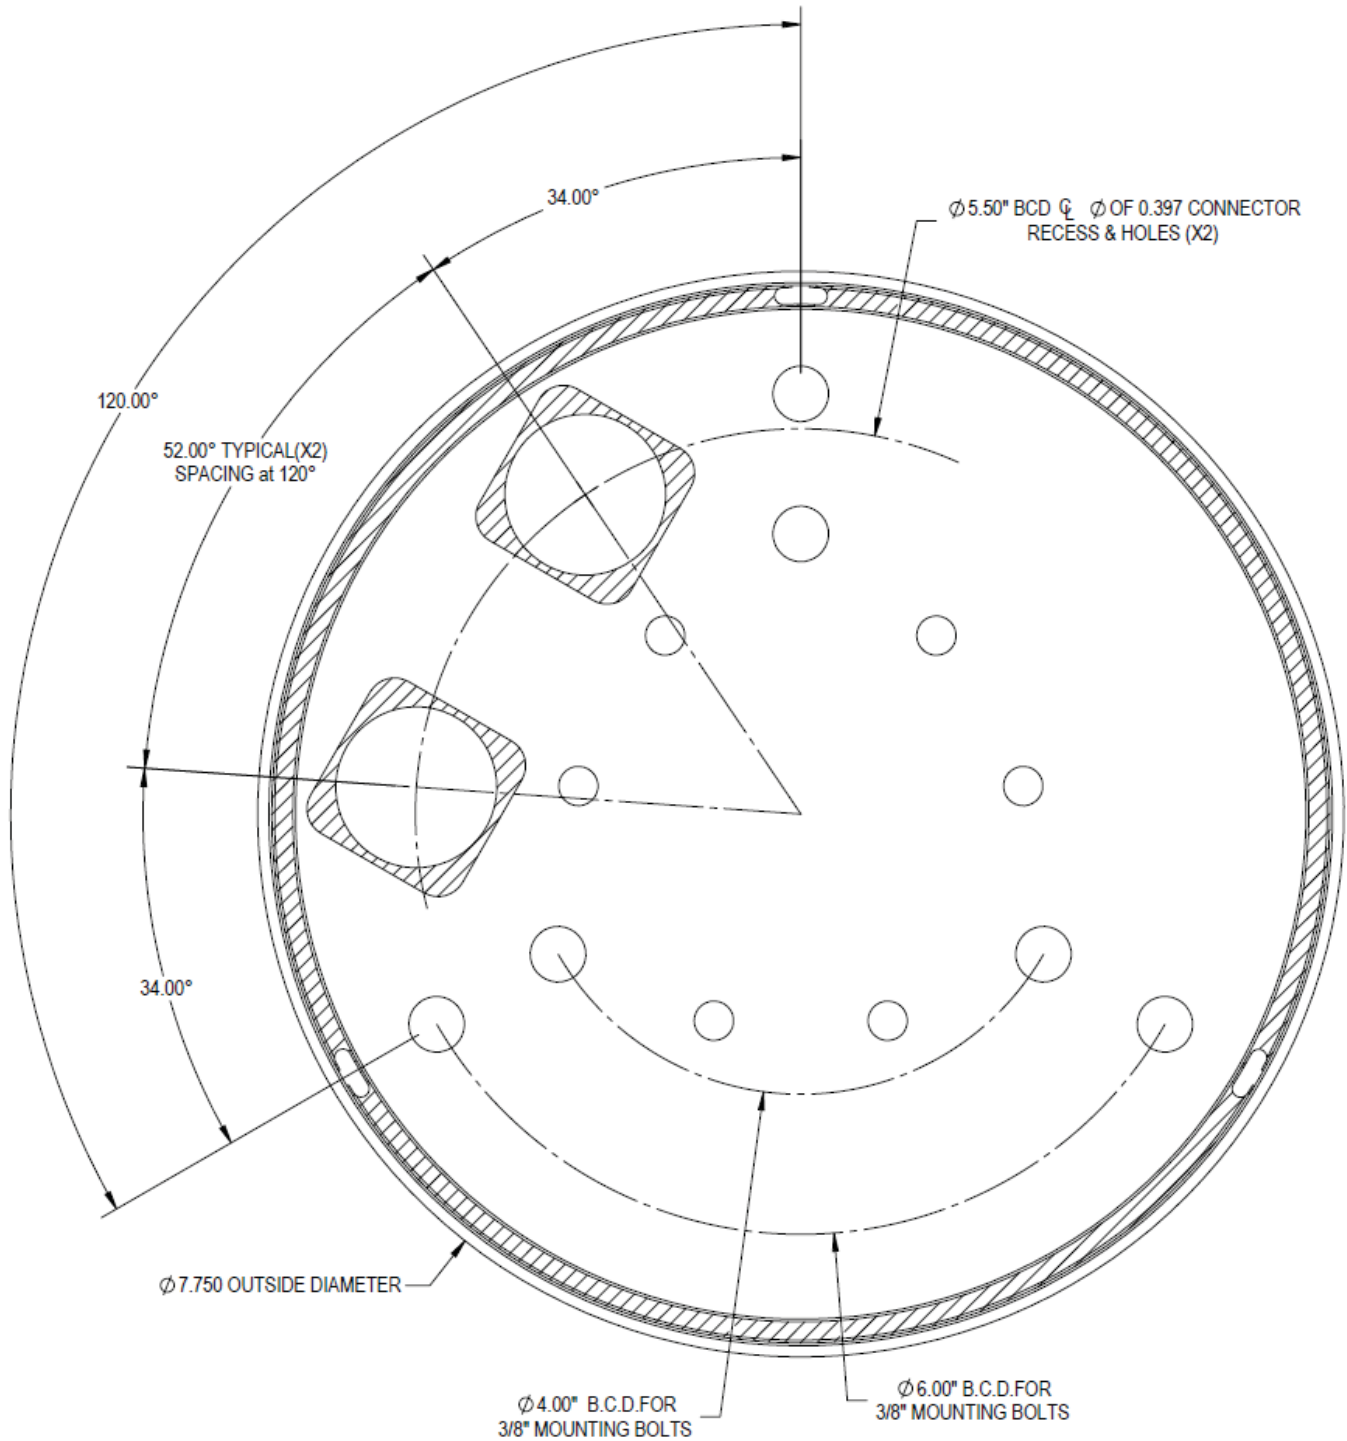


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

UT360X06Fx60

SINGLE BAND | OMNI | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)




1695-2700 MHz



Horizontal | 1800 MHz

Horizontal | 1900 MHz




Horizontal | 2100 MHz



0° | Vertical | 1800 MHz

0° | Vertical | 1900 MHz

0° | Vertical | 2100 MHz



2° | Vertical | 1800 MHz

2° | Vertical | 1900 MHz

2° | Vertical | 2100 MHz

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

UT360X06Fx60

SINGLE BAND | OMNI | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)





Ordering Options

When ordering, select the Paint Color and Degree of Electrical Downtilt (x).

Paint Color	Electrical Downtilt Degree (x)	Model Number
Painted Gray	0°	UT360X06F060
	2°	UT360X06F260
Painted Brown	0°	UT360X06F060BR
	2°	UT360X06F260BR

Mounting Kits

This antenna can be mounted using any of the following mounting kits. Mounting kits must be ordered separately.

Side Mounting Bracket Kit	Top Mounting Bracket Kit	Utility Pole Mounting Bracket Kit	Wide Diameter Pole Top Mounting Bracket Kit
CWT-MKS-SIDE	CWT-MKS-TOP	WB3X-MKS-01	CWT-MKS-BASE-xx
			

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.