


Conforme Original du
2012-10-18 07:51:31
Confidential

NOTICE DE MONTAGE MOUNTING INSTRUCTIONS

M8x130 bolt
from pole mounting kit

supplied with the
pole mounting kit

BE CAREFUL WITH THE
ORIENTATION OF THE
HEDGES OF THE
TWO SQUARES



scissor mounting bracket
of the antenna in contact
here


TORQUE SETTING FOR M8: 25 Nm

To be throw and
be replaced by ⑨



POLE MOUNTING KIT:
48-115 DIAMETER POLES
PART No: 0900181/00

70-150 DIAMETER POLES
PART No: 0900182/00

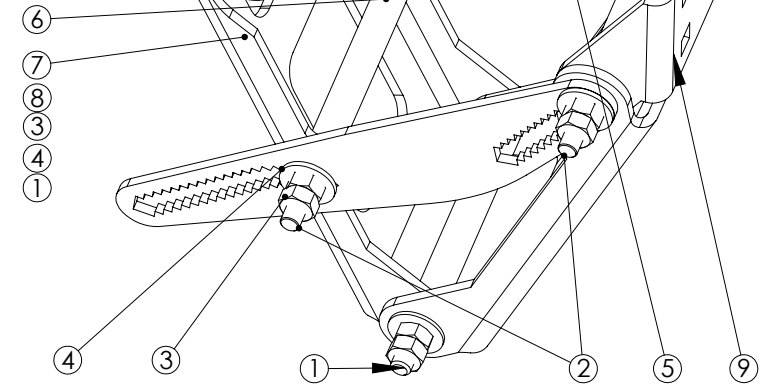

ITEM NO.	PART NO.	DRAWING No	DESCRIPTION	Qty
1	4473163/68	/	M8x130 Hex Hd Bolt Hot Galvanized - mid steel 8.8	1
2	83539	/	M8x140 Round Hd screw with square neck Hot Galvanized-mid steel 8.8	2
3	6273400/68	/	M8 Full Nut Hot Galvanized-mid steel 8.8	6
4	6773500/68	/	M8 Plain Washer Hot Galvanized-mid steel 8.8	12
5	H3122	H3122-003-02	Connecting bar Hot galvanized	2
6	3801759/00	3/9252759	Tilt Spacing Bar Hot galvanized	3
7	H3124	H3124-003-01	Long Scissor Bar Hot galvanized	1
8	3902772/68	2/9252772	Short Scissor Arm Hot galvanized	1
9	H3416	H3416-003-00	Scissor Mounting Bracket Hot galvanized	2

TWO POINTS TILT POLE MOUNTING INSTALLATION

PART No: 0900397/00



Chemin du Roy,ZI La boitardiere,37400 Amboise
www.amphenoljaybeam.com

N° de plan: RACINE TYPE IND
Drawing NB:
H3452-104-01