

CUUT070X06Fxyz0

TRI BAND | 3-SECTOR, CLOVER-SHAPE | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)

Features

- 3-Sector, Clover-Shape configuration with 18 connectors
- Ideal for Small Cell / DAS applications
- Available with 4.3/10 or 7/16-DIN connectors
- Four unique mounting options
- Available in gray and brown



Connector Description

The antenna has 18 connectors located at the bottom.

Low Band	■ R1	696-960 MHz	(6x) 4.3/10 or 7/16-DIN Female
High Band #1	■ Y1	1695-2700 MHz	(6x) 4.3/10 or 7/16-DIN Female
High Band #2	■ Y2	1695-2700 MHz	(6x) 4.3/10 or 7/16-DIN Female

Electrical Characteristics	Low Band ■ R1		High Bands ■ Y1 and ■ Y2			
Frequency Bands (MHz)	696-960 MHz		(2x) 1695-2700 MHz			
	696-806	806-960	1695-1880	1850-1990	1920-2200	2300-2700
Polarization	±45°		(2x) ±45°			
Horizontal Beamwidth	70°	65°	70°	68°	65°	63°
Vertical Beamwidth	35°	30°	17°	16°	15°	14°
Gain	9.0 dBi	10.0 dBi	13.0 dBi	13.5 dBi	14.0 dBi	14.3 dBi
Electrical Downtilt (°)	(x) 0, 5		(y) 0, 6			
Impedance	50Ω		50Ω			
VSWR	≤ 1.5:1		≤ 1.5:1			
Upper Sidelobe Suppression	> 15 dB		> 15 dB			
Front-to-Back Ratio	> 30 dB		> 30 dB			
Isolation Between Ports	20 dB		22 dB			
IM3 (2x20W carrier)	< -153 dBc		< -153 dBc			
Input Power	(6x) 500 W		(12x) 300 W			
Diplexed	No					
Number of Sectors, Sector Spacing and/or Pattern Shape	3 Sectors, 120° Spacing, Clover-Shape					
Lightning Protection	Direct Ground					

Mechanical Characteristics


Antenna Dimensions (Height x Diameter)	610 x 371 mm	24.0 x 14.6 in
Weight without Mounting Bracket Kit	11.8 kg	26.0 lbs
Antenna Volume	0.07 m ³	2.3 ft ³
Survival Wind Speed	200 km/hr	125 mph
Wind Area	0.22 m ²	2.4 ft ²
Wind Load (160 km/hr or 100 mph)	191 N	43 lbf

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

CUUT070X06Fxyz0

TRI BAND | 3-SECTOR, CLOVER-SHAPE | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)

Bottom View - Labeling

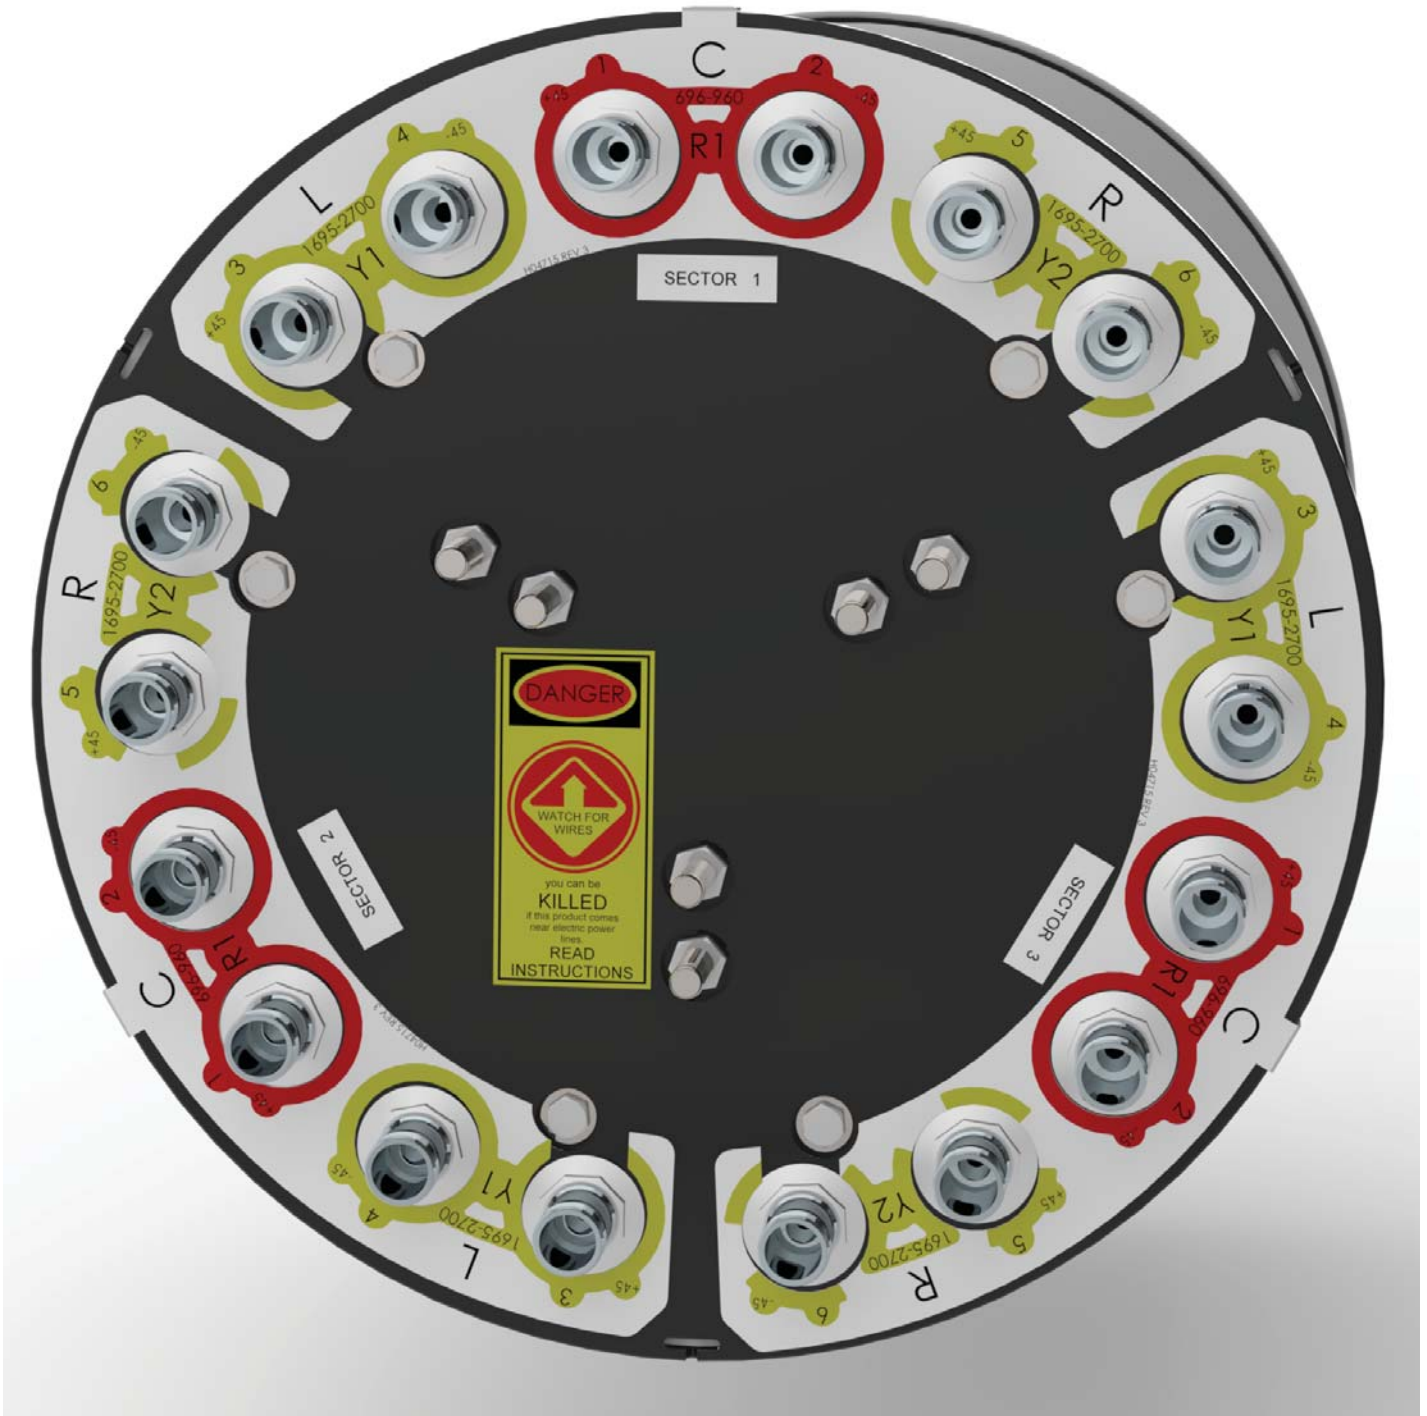


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

CUUT070X06Fxyz0

TRI BAND | 3-SECTOR, CLOVER-SHAPE | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)

Bottom View - Connector Diagram

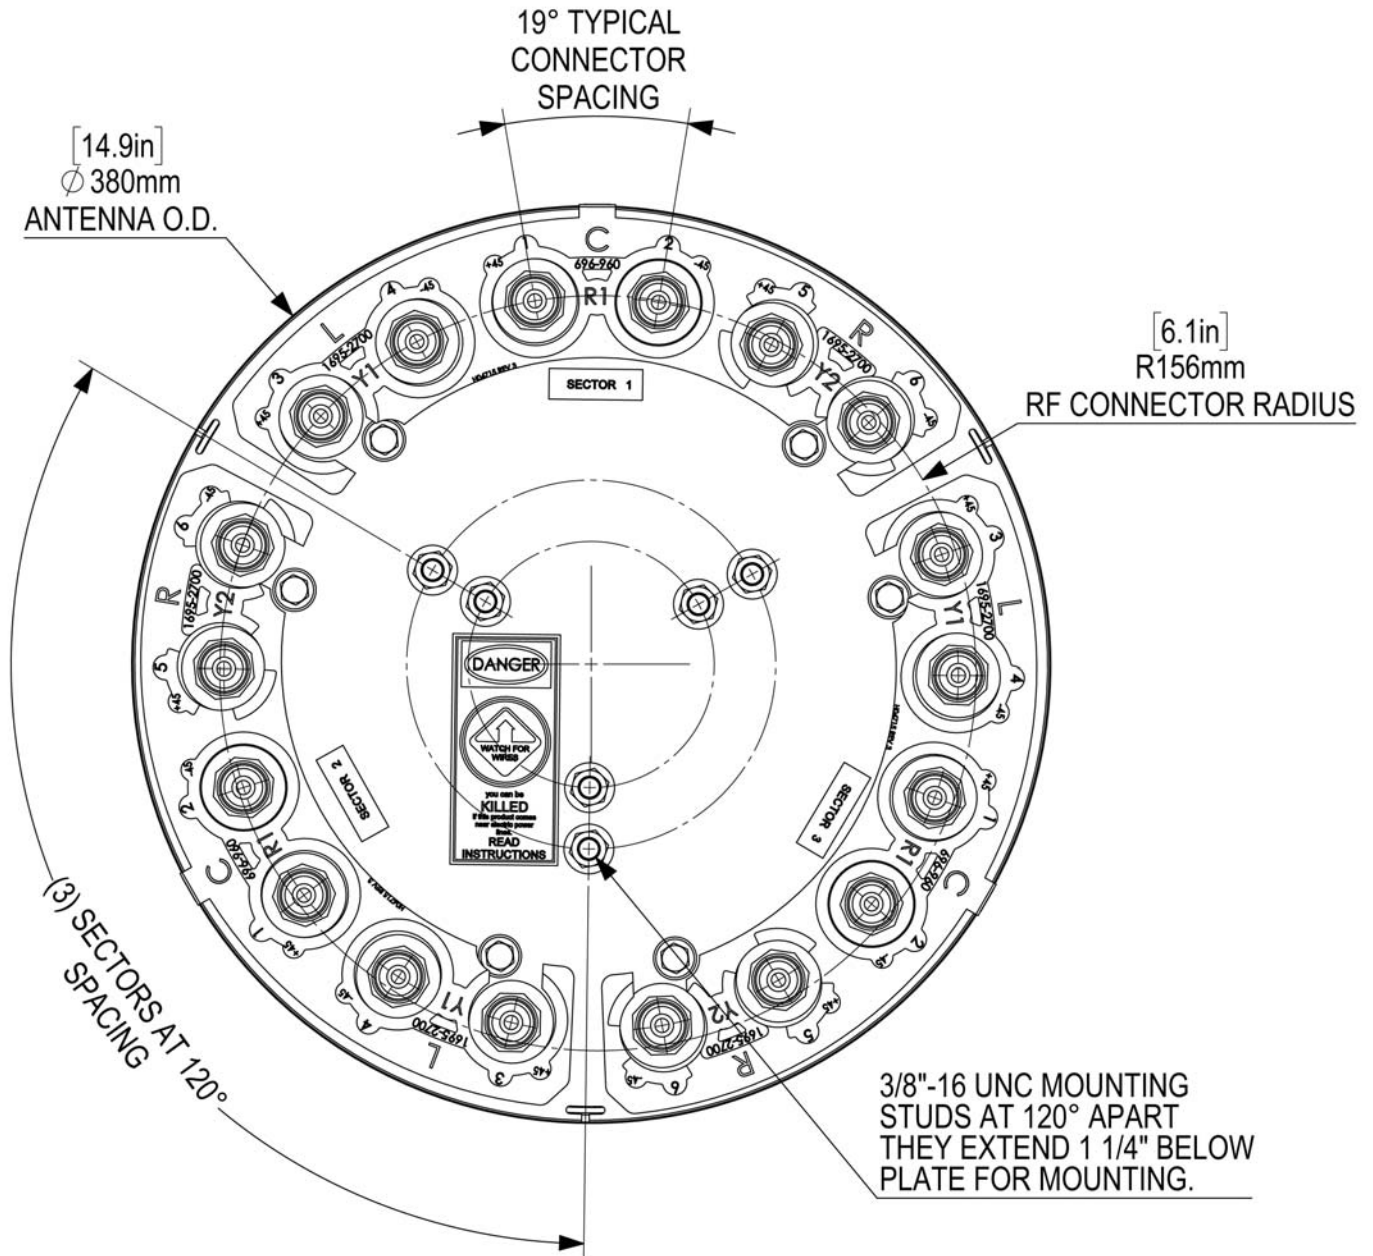


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


CUUT070X06Fxyz0

TRI BAND | 3-SECTOR, CLOVER-SHAPE | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)


696-960 MHz

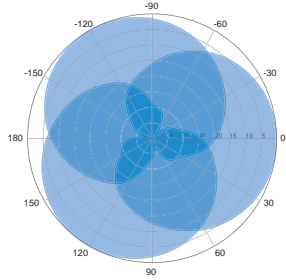


Horizontal | 750 MHz

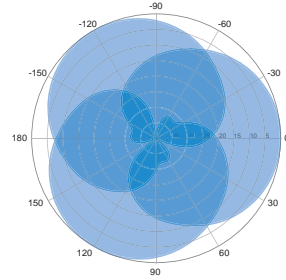


Horizontal | 850 MHz

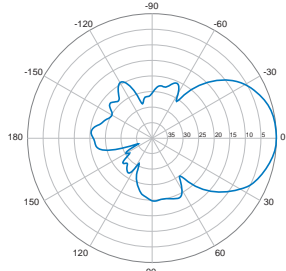


0° | Vertical | 750 MHz

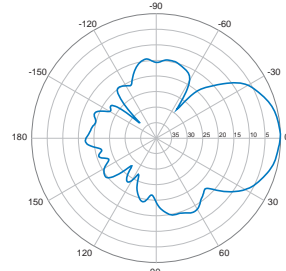

0° | Vertical | 850 MHz

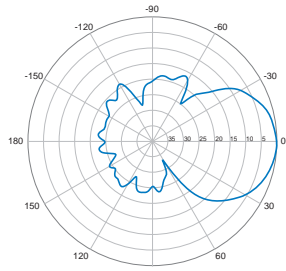

5° | Vertical | 750 MHz

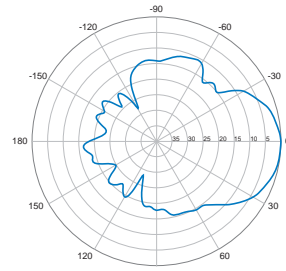


5° | Vertical | 850 MHz

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


CUUT070X06Fxyz0

TRI BAND | 3-SECTOR, CLOVER-SHAPE | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)


1695-2700 MHz

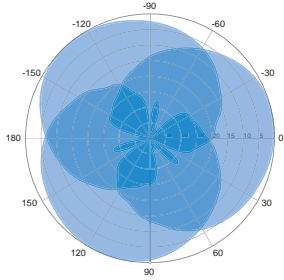


Horizontal | 1800 MHz

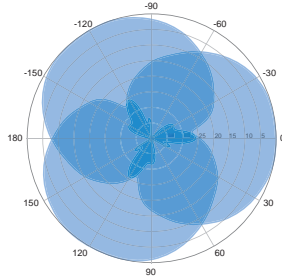


Horizontal | 1900 MHz

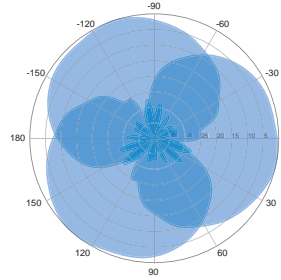


Horizontal | 2100 MHz

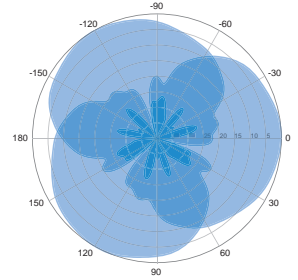


Horizontal | 2600 MHz

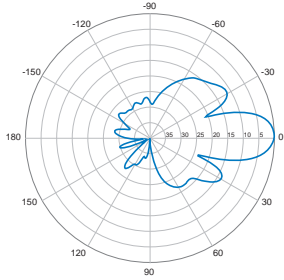


0° | Vertical | 1800 MHz

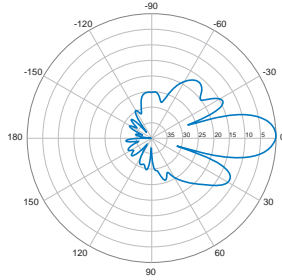


0° | Vertical | 1900 MHz

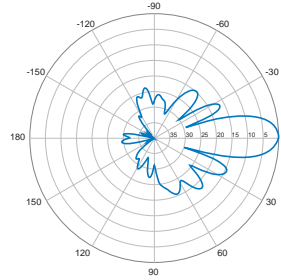


0° | Vertical | 2100 MHz

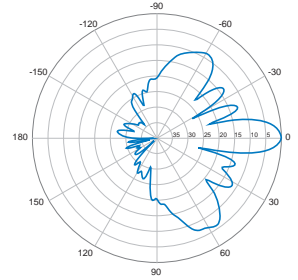


0° | Vertical | 2600 MHz

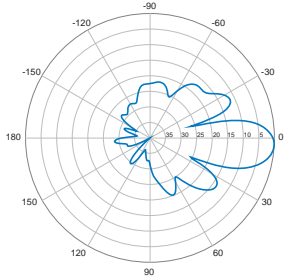


6° | Vertical | 1800 MHz

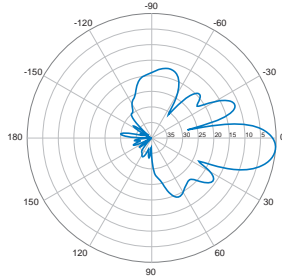

6° | Vertical | 1900 MHz

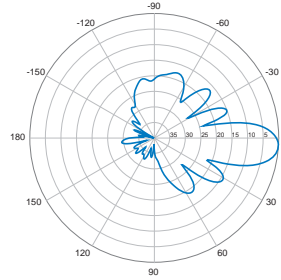

6° | Vertical | 2100 MHz

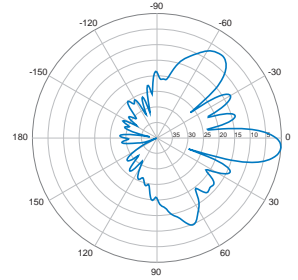

6° | Vertical | 2600 MHz

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

CUUT070X06Fxyz0

TRI BAND | 3-SECTOR, CLOVER-SHAPE | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)





Ordering Options

When ordering, select the Paint Color, Degree of Electrical Downtilt (**xy**) for the Low and High Bands and the Connector Type (**z**).

Paint Color	Electrical Downtilt Degree		Connector Type (z)	
	Low Band (x)	High Band (y)	4.3/10 Female	7/16-DIN Female
Painted Gray	0°	0°	CUUT070X06F 00s 0	CUUT070X06F 00D 0
	0°	6°	CUUT070X06F 06s 0	CUUT070X06F 06D 0
	5°	0°	CUUT070X06F 50s 0	CUUT070X06F 50D 0
	5°	6°	CUUT070X06F 56s 0	CUUT070X06F 56D 0
Painted Brown	0°	0°	CUUT070X06F 00s0BR	CUUT070X06F 00D0BR
	0°	6°	CUUT070X06F 06s0BR	CUUT070X06F 06D0BR
	5°	0°	CUUT070X06F 50s0BR	CUUT070X06F 50D0BR
	5°	6°	CUUT070X06F 56s0BR	CUUT070X06F 56D0BR

Mounting Kits

This antenna can be mounted using any of the following mounting kits. Mounting kits must be ordered separately.

Side Mounting Bracket Kit	Top Mounting Bracket Kit	Utility Pole Mounting Bracket Kit	Wide Diameter Pole Top Mounting Bracket Kit
CWT-MKS-SIDE	CWT-MKS-TOP	WB3X-MKS-01	CWT-MKS-BASE-xx
			

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.