

HEX BAND | OMNI | CANISTER ANTENNA | X-POL | FIXED TILT | 1219 MM (48.0 IN)

Features

- Omni configuration with 12 connectors
- Ideal for Small Cell / DAS applications
- Available with 4.3-10 connectors
- Four unique mounting options
- Available for order with a grey, brown or black radome

Connector Description

The antenna has 12 connectors located at the bottom.					
Low Band #1	R 1	696-960 MHz	(2x) 4.3-10 Female		
Low Band #2	R 2	696-960 MHz	(2x) 4.3-10 Female		
Mid Band #1	<mark> </mark>	1695-2700 MHz	(2x) 4.3-10 Female		
Mid Band #2	<mark> </mark>	1695-2700 MHz	(2x) 4.3-10 Female		
Mid Band #3	<mark> </mark>	1695-2700 MHz	(2x) 4.3-10 Female		
Mid Band #4	<mark> </mark>	1695-2700 MHz	(2x) 4.3-10 Female		



Electrical Characteristics	R 1,	📕 R1, 📕 R2		Y 1, Y 2, Y 3, Y 4			
	(2x) 696-	(2x) 696-960 MHz		(4x) 1695-2700 MHz			
Frequency Bands (MHz)	696-806	806-960	1695-1880	1850-1990	1920-2200	2300-2700	
Polarization	(2x)	(2x) ±45°		(4x) ±45°			
Horizontal Beamwidth	360°	360°	360°	360°	360°	360°	
Vertical Beamwidth	42.1 ±5.1°	35.0° ±5.9°	18.1° ±1.6°	17.0 ±1.7°	15.5° ±3.0°	13.0° ±1.6°	
Gain (dBi)	5.3 ±1.3	6.3 ±1.0	9.1 ±0.9	9.4 ±1.0	9.3 ±0.9	9.2 ±0.8	
Electrical Downtilt (°)	(x	(x) 0		(y) 0, 2, 4, 6			
Impedance	50	50Ω		50Ω			
VSWR	≤ 1	≤ 1.5:1		≤ 1.5:1			
Upper Sidelobe Suppression	> 9	> 9 dB		> 10 dB			
Isolation Between Ports	20	20 dB		22 dB at 0°, 25 dB at 6°			
IM3 (2x20W carrier)	< -15	< -153 dBc		< -153 dBc			
Input Power	(4x) 500 W		(8x) 300 W				
Number of Sectors, Sector Spacing and/or Pattern Shape	Omni						
Lightning Protection Direct Ground							


Mechanical Characteristics

Antenna Dimensions (Height x Diameter)	1219 x 371	mm	48.0 x 14.6	in
Weight without Mounting Bracket Kit	17.3	kg	38.1	lbs
Antenna Volume	0.13	m ³	4.7	ft ³
Survival Wind Speed	241	km/hr	150	mph
Wind Area	0.47	m ²	5.0	ft²
Wind Load (160 km/hr or 100 mph)	391	N	88	lbf



HEX BAND | OMNI | CANISTER ANTENNA | X-POL | FIXED TILT | 1219 MM (48.0 IN)


Bottom View - Labeling

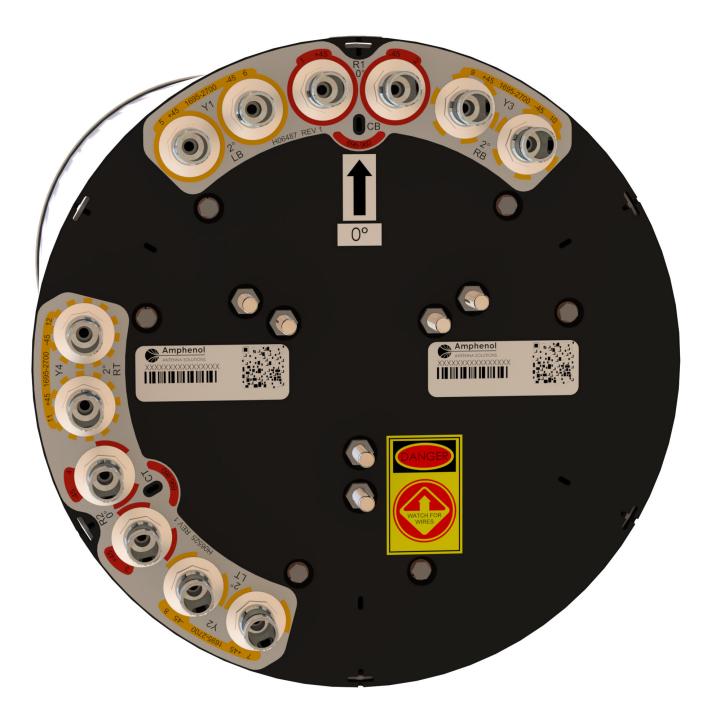



HEX BAND | OMNI | CANISTER ANTENNA | X-POL | FIXED TILT | 1219 MM (48.0 IN)

Bottom View - Connector Diagram

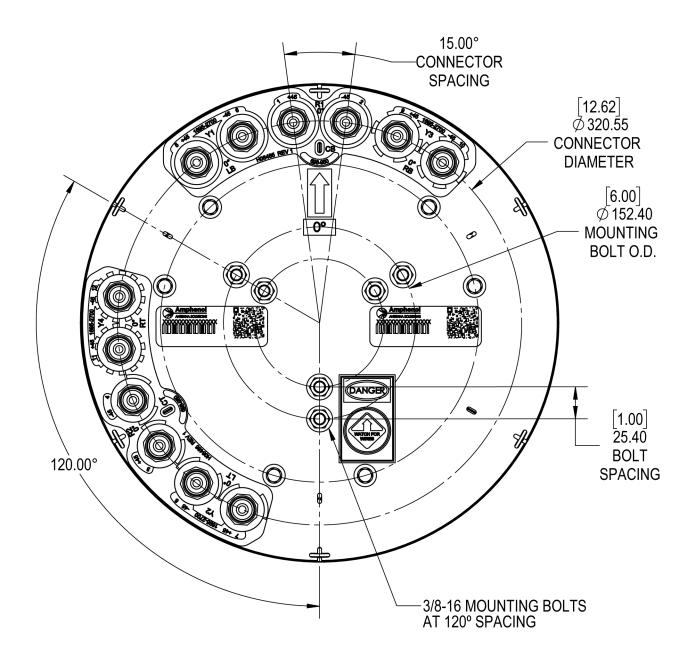



HEX BAND | OMNI | CANISTER ANTENNA | X-POL | FIXED TILT | 1219 MM (48.0 IN)

Ordering Options

When ordering, select the Radome Color and Degree of Electrical Downtilt for each band.

	Electrical Downtilt Degree				
Radome Color	Low Band R1, R2 (x)	Mid Band Y1, Y2, Y3, Y4 (y)	Model Number		
	0°	0°	2C4UT360X12F <mark>00</mark> s0		
	0°	2°	2C4UT360X12F <mark>02</mark> s0		
Grey Pantone 420 C	0°	4°	2C4UT360X12F <mark>04</mark> s0		
	0°	6°	2C4UT360X12F <mark>06</mark> s0		
	0°	Y1 & Y3 = 0°; Y2 & Y4 = 6°	2C4UT360X12F AA s0		
	0°	0°	2C4UT360X12F 00 s0 BR		
_	0°	2°	2C4UT360X12F 02 s0 BR		
Brown Pantone 476 C	0°	4°	2C4UT360X12F 04 s0 BR		
	0°	6°	2C4UT360X12F 06 s0 BR		
	0°	Y1 & Y3 = 0°; Y2 & Y4 = 6°	2C4UT360X12FAAs0BR		
Black RAL 9011	0°	0°	2C4UT360X12F 00 s0 BK		
	0°	2°	2C4UT360X12F 02 s0 BK		
	0°	4°	2C4UT360X12F 04 s0 BK		
	0°	6°	2C4UT360X12F <mark>06</mark> s0 BK		
	0°	Y1 & Y3 = 0°; Y2 & Y4 = 6°	2C4UT360X12F AA s0 BK		

Mounting Kits

This antenna can be mounted using any of the following mounting kits. Mounting kits must be ordered separately.

Side Mounting Bracket Kit	Top Mounting Bracket Kit	Utility Pole Mounting Bracket Kit	Wide Diameter Pole Top Mounting Bracket Kit
CWT-MKS-SIDE	CWT-MKS-TOP	WB3X-MKS-01	CWT-MKS-BASE-xx