

790-960 / 790-960 / 1710-2170 / 1710-2170 MHz

JAYBEAM Wireless

5963200

Twin Dual Band | Panel Antenna | (2x) XX-Pol | 68° / 68° / 65° | 16.5 / 16.5 / 18.1 / 18.1 dBi | Variable Tilt

- Twin dual band, (2x) XX-Pol, variable tilt, panel antenna with 8 connectors
- Independent tilt on each band $0-10^{\circ}$ / $0-10^{\circ}$ / $0-10^{\circ}$ / $0-10^{\circ}$
- Available as a Manual or Remote Electrical Tilt Antenna, AISG v1.1 or AISG v2.0/3GPP
- Patented internal RET actuator adds no additional length to the antenna (field replaceable)



| Ordering Options | Model Number | | | | |
|---|------------------|--------------------|----------|--|--|
| Manual Electrical Tilt | 5963200 | | | | |
| Remote Electrical Tilt AISG v1.1 | 5963200A | | | | |
| Remote Electrical Tilt AISG v2.0/3GPP | 5963200G | | | | |
| Other accessories are ordered separately. | | | | | |
| Electrical Characteristics | (2x) 790-960 MHz | (2x) 1710-2170 MHz | | | |
| Frequency Bands (MHz) | 790880960 | 17101880 | 19002170 | | |
| Polarisation | (2x) ±45° | (2x) ±45° | | | |
| Harizantal Baamwidth | 720 400 450 | 4E0 | 4.10 | | |

| Electrical Characteristics | | (2x) 790-960 MHz | | (2x) 1710-2170 MHz | | | |
|---|--------------------------|--|----------------------------------|--------------------|----------------|-------|--|
| Frequency Bands (MHz) | | 790880960 | 1710 | 1880 19002170 | | | |
| olarisation | | (2x) ±45° | (2x) ±45° | | | | |
| Horizontal Beamwidth | | 72°68°65° | 6! | 65° 64° | | 1° | |
| Vertical Beamwidth | | 9° | 6 | 0 | ° 6° | | |
| Gain (dBi) | 0° Tilt | 15.516.016.5 | 17.317.6 | | 17.6 | .18.1 | |
| | 5° Tilt | 15.516.016.5 | 17.2. | 17.217.4 17.41 | | .17.9 | |
| | 10° Tilt | 15.415.916.4 | 17.2. | 17.3 17.317 | | .17.7 | |
| Electrical Downtilt | | 0-10° | | 0-10 |)° | | |
| Impedance | | 50Ω | 50Ω | | | | |
| VSWR | | < 1.5 | < 1.5 | | | | |
| pper Sidelobe Suppression (typical) | | 18 dB | 18 dB | | | | |
| Front-to-Back Ratio | | > 30 dB | | > 30 | > 30 dB | | |
| Isolation Between Bands (i | nter-band; typical) | 45 dB | 45 dB | | IB | | |
| solation Between Ports (intra-band) | | > 253030 dB | > 30 dB | | | | |
| Isolation Between Left and Right Arrays | | > 29 dB | > 30 dB | | | | |
| M3 (2x20W carrier) | | < -110 dBm | < -110 dBm | | | | |
| Input Power | | 200 W | 160 W | | | | |
| Total Number of Connectors | | Antenna has 8 connectors located at the bottom | | | | | |
| Connectors Per Band, | 790-960 MHz | 4 Connectors / 7/16-DIN Female / Long Neck / Bottom / Red and Green Rings | | | | | |
| Type, Location | 1710-2170 MHz | 4 Connectors / 7/16-DIN Female / Long Neck / Bottom / White and Blue Rings | | | | | |
| Operating Temperature | | | -40° to +60° C (-40° to +140° F) | | | | |
| Mechanical Characteristics | 5 | | | | | | |
| Shroud Material / Colour | | | Outdoor Plastic | , Grey RAL7035 | | | |
| Dimensions (Length x Wid | th x Depth) | 1920 x 442 x 152 | mm | 75.0 | 6 x 17.4 x 6.0 | in | |
| Weight without Mounting E | Brackets | 38.5 | kg | 84.9 lbs | | lbs | |
| Operational Wind Speed | nal Wind Speed 160 km/hr | | 100 | mph | | | |
| Survival Wind Speed | | 200 | km/hr | | 124 | mph | |
| Wind Loads (160 km/hr or 100 mph) | Front | 1120 | N | | 251.8 | lbf | |
| | Lateral | 380 | N | | 85.4 | lbf | |
| | Rear | 1050 | N | | 236 | lbf | |
| | 1 | | | | | | |





Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

790-960 / 790-960 / 1710-2170 / 1710-2170 MHz

5963200

Twin Dual Band | Panel Antenna | (2x) XX-Pol | 68° / 65° / 65° | 16.5 / 16.5 / 18.1 / 18.1 dBi | Variable Tilt

| Environmental Characteristics | | | | | | | |
|---|--|--|-----------------------|----------------|--|--|--|
| Environmental | | ETS 3 | 00 019 | | | | |
| RoHS Compliant | | Yes | | | | | |
| Electrical Downtilt Control | | | | | | | |
| Electrical downtilt for each band can be co | ontrolled separately. Tilt indicator(| (s) are covered by removable tr | ansparent cap(s). | | | | |
| Manual Electrical Tilt (MET) Control | A coloured knob at the end of the tilt indicator allows change of the tilt without need of a tool. The knob colour is identical to the corresponding connector ring colour. To access the knob, remove the cap by turning it counterclockwise. It is re-installed by opposite rotation. Do not remove the transparent cap(s) from the antenna. | | | | | | |
| Remote Electrical Tilt (RET) Control | The remote control of the electrical tilt is managed by a module (MDCU) totally inserted at the bottom of the antenna One single module controls individually the tilt of each band (no need of daisy chain cables between the bands). This module does not add any additional length at the bottom of the antenna. For RET control, the transparent cap must be in place and locked. The tilt angle indicator always remains visible and the antenna still has manual tilt control (manual override). | | | | | | |
| RET Module | The RET module is factory in | stalled and does not need to b | e ordered separately. | | | | |
| | Part Number for AISG v1.1 p | Part Number for AISG v1.1 protocol: MDCU-A0000 One unit installed in 5963200A | | | | | |
| | Part Number for 3GPP/AISG | Part Number for 3GPP/AISG v2.0 protocol: MDCU-G0000 One unit installed in 5963200G | | | | | |
| Important Installation Instructions | In order to operate RET control, the transparent caps covering the tilt adjustment indicators must be engaged and locked. Do not cut them from the antenna. | | | | | | |
| | Do not install the antenna with the connectors facing upward. | | | | | | |
| Mounting Options | Part Number | Image | Fits Pipe Diameter | Weight | | | |
| All mounting bracket kits are ordered sepa | rately unless otherwise indicated. | Select from the options listed | below. | | | | |
| 2-Point Mounting Bracket Kit | 0900181/00 | | 48-115 mm 1.9-4.5 in | 3.4 kg 7.5 lbs | | | |
| 2-Point Mounting Bracket Kit | 0900182/00 | | 70-150 mm 2.8-5.9 in | 3.9 kg 8.6 lbs | | | |


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.



5963200

Twin Dual Band | Panel Antenna | (2x) XX-Pol | 68° / 68° / 65° / 65° | 16.5 / 16.5 / 18.1 / 18.1 dBi | Variable Tilt


Bottom View of Antenna

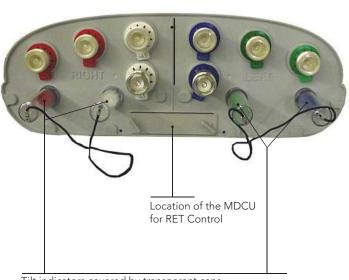

Tilt indicators covered by transparent caps. Manual adjustment is accessed by removing the caps. Knob colours are the same as the connectors.




In order to operate RET control, the transparent caps covering the tilt adjustment indicators must be engaged and locked. Do not cut them from the antenna.

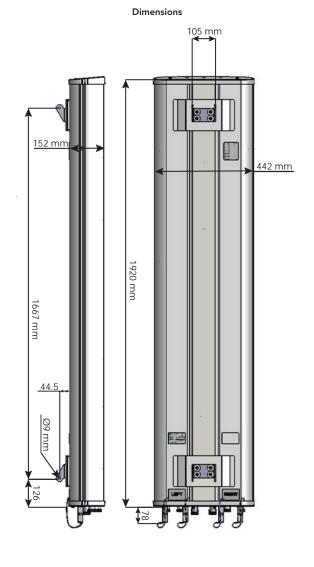



5963200

Twin Dual Band | Panel Antenna | (2x) XX-Pol | 68° / 68° / 65° | 16.5 / 16.5 / 18.1 / 18.1 dBi | Variable Tilt

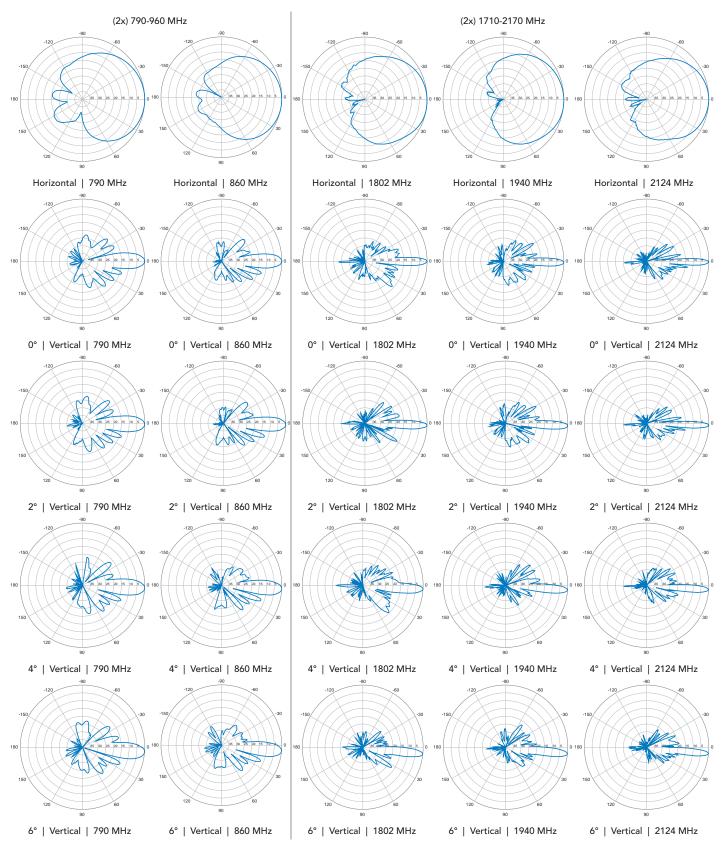

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.



5963200

Twin Dual Band | Panel Antenna | (2x) XX-Pol | 68° / 65° / 65° | 16.5 / 16.5 / 18.1 / 18.1 dBi | Variable Tilt

