

1915 mm

5963300

5963300G 5963300Dx

4-Band, 8-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 1915 mm



- Quad band antenna, dual polarisation, 8 connectors
- \bullet Independent tilt on each band 0-10° / 0-10° / 0-10° / 0-10°
- Lightweight TwinLine™ platform and low windload
- MET and RET versions, 3GPP/AISG2.0, in multiple single RET (multiple device type1) or in Multi-RET (device type 17, with firmware above MD3.10).
- Our patented, RET module controlling all tilt angles, fully inserted inside the antenna (field replaceable)

| | Frequency Range (MHz) | 698-960 | 698-960 | 1695-2690 | 1695-2690 | | | |
|------------------|-------------------------|---------------------|-------------|-----------|-----------|--|--|--|
| > | Array | ■ R1 | ■ R2 | Y1 | Y2 | | | |
| ERVIE\ | Connector | 1-2 | 3-4 | 5-6 | 7-8 | | | |
| PRODUCT OVERVIEW | Polarization | XPOL | XPOL | XPOL | XPOL | | | |
| | Azimuth Beamwidth (avg) | 65° | 65° | 65° | 65° | | | |
| ₫ | Electrical Downtilt | 0-10° | 0-10° | 0-10° | 0-10° | | | |
| | Dimensions | 1915 x 432 x 153 mm | | | | | | |



ORDERING OPTIONS Select from the different options listed below

| SELECT ELECTRICAL DOWNTILT CONTROL & AISG PROTOCOL | SELECT ACTUATOR | SELECT CONNECTOR TYPE | ANTENNA MODEL NUMBER |
|--|-------------------------------------|--------------------------|-------------------------|
| Manual Electrical Tilt (MET) | | 7/16-DIN Female | 5963300 |
| Remote Electrical Tilt (RET) | Multi-Device Control Unit (MDCU) | 7/16-DIN Female | 5963300G |
| AISG v2.0 / 3GPP | Multi-Device Dual Unit (MDDU) | 7/16-DIN Female | 5963300Dx* |

^{*}Pre-commissioned configuration; Contact Amphenol for further details.







65° 1915 mm

5963300

5963300G 5963300Dx

4-Band, 8-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 1915 mm

| Frequency Range | | MHz | 698-960 | | | | | |
|---|-------------------------------|---------|--------------|-----------------|--------------|--------------|--|--|
| | | MHz | 698-806 | 790-862 824-894 | | 880-960 | | |
| Polarization | | | | ±4 | 15° | I. | | |
| Gain Over all Tilts | | dBi | 14.7 ± 0.6 | 15.6 ± 0.3 | 15.7 ± 0.4 | 15.8 ± 0.3 | | |
| Azimuth Beamwidth | | degrees | 74.4° ± 6.5° | 71.1° ± 4.7° | 72.2° ± 2.9° | 70.9° ± 1.8° | | |
| Elevation Beamwidth | | degrees | 11.7° ± 1.1° | 10.3° ± 0.5° | 10.1° ± 0.4° | 9.6° ± 0.6° | | |
| Electrical Downtilt | | degrees | 0°-10° | | | | | |
| Impedance | | Ohms | 50 | | | | | |
| VSWR | | | < 1.5 | | | | | |
| Passive Interm 3rd Order for 2 | odulation 2 x 20W Carriers | dBm | < -110 | | | | | |
| Front-to-Back | Ratio, Total Power, ±30° | dB | > 21.0 | > 21.3 | > 21.4 | > 23.6 | | |
| Upper Sidelobe Suppression, Peak to 20° | | dB | > 15.5 | > 17.3 | > 16.8 | > 17.0 | | |
| Cross Polar Ratio Main Direction (0°) | | dB | > 16.1 | > 17.0 | > 16.7 | > 16.6 | | |
| Maximum Effective Power Per Port | | Watts | 250 | | | | | |
| Inter/Intra Band Isolation | | dB | > 25 | | | | | |

Standard values based on NGMN-P-BASTA version 9.6 recommendation.

| ELECTRICAL | SPECIFICATIONS | Low Band |
|------------|----------------|----------|
| | | |

| R2 |
|----|
|----|

| Frequency Range | | MHz | | 698 | -960 | | | |
|---|-------------------------------------|---------|--------------|--------------|--------------|--------------|--|--|
| | | MHz | 698-806 | 790-862 | 824-894 | 880-960 | | |
| Polarization | 1 | | ±45° | | | | | |
| Gain | Over all Tilts | dBi | 14.5 ± 0.5 | 15.2 ± 0.4 | 15.4 ± 0.5 | 15.7 ± 0.4 | | |
| Azimuth Beamwidth | | degrees | 75.1° ± 5.5° | 70.5° ± 3.6° | 70.3° ± 2.6° | 72.1° ± 2.2° | | |
| Elevation Beamwidth | | degrees | 11.8° ± 1.0° | 10.6° ± 0.5° | 10.4° ± 0.6° | 9.6° ± 0.6° | | |
| Electrical D | owntilt | degrees | 0°-10° | | | | | |
| Impedance | | Ohms | 50 | | | | | |
| VSWR | | | < 1.5 | | | | | |
| | ermodulation or 2 x 20W Carriers | dBm | < -110 | | | | | |
| Front-to-Ba | ck Ratio, Total Power, ±30° | dB | > 21.7 | > 22.5 | > 24.3 | > 25.1 | | |
| Upper Sidelobe Suppression, Peak to 20° | | dB | > 18.6 | > 17.1 | > 17.1 | > 15.9 | | |
| Cross Polar Ratio - Main Direction (0°) | | dB | > 17.0 | > 17.2 | > 16.8 | > 16.2 | | |
| Maximum Effective Power Per Port | | Watts | 250 | | | | | |
| Inter/Intra Band Isolation | | dB | > 25 | | | | | |

Standard values based on NGMN-P-BASTA version 9.6 recommendation.



ANTENNA SOLUTIONS

65°

1915 mm

5963300

5963300G 5963300Dx

4-Band, 8-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 1915 mm

| ELECTRICA | L SPECIFICATIONS Ultra V | Vide Band | Y1 | | | | | | |
|---|----------------------------------|-----------|--------------|--------------|--------------|--------------|--------------|--|--|
| Frequency Range | | MHz | 1695-2690 | | | | | | |
| | | MHz | 1695-1880 | 1850-1990 | 1920-2180 | 2300-2500 | 2490-2690 | | |
| Polarization | | | | ı | ±45° | 1 | | | |
| Gain Over all Tilts | | dBi | 16.4 ± 0.4 | 16.5 ± 0.4 | 16.7 ± 0.4 | 16.6 ± 0.4 | 16.8 ± 0.4 | | |
| Azimuth Beamwidth | | degrees | 66.9° ± 4.1° | 66.4° ± 3.8° | 63.0° ± 4.4° | 64.9° ± 3.6° | 65.5° ± 4.2° | | |
| Elevation Beamwidth | | degrees | 7.5° ± 0.6° | 7.0° ± 0.4° | 6.5° ± 0.6° | 5.6° ± 0.1° | 5.1° ± 0.4° | | |
| Electrical Downtilt | | degrees | 0°-10° | | | | | | |
| Impedance | | Ohms | 50 | | | | | | |
| VSWR | | | < 1.5 | | | | | | |
| Passive Interr 3rd Order for | modulation · 2 x 20W Carriers | dBm | < -110 | | | | | | |
| Front-to-Back | Ratio, Total Power, ±30° | dB | > 23.4 | > 23.0 | > 23.3 | > 24.6 | > 25.3 | | |
| Upper Sidelobe Suppression, Peak to 20° | | dB | > 16.6 | > 16.9 | > 16.9 | > 16.8 | > 16.5 | | |
| Cross Polar Ratio - Main Direction (0°) | | dB | > 14.6 | > 14.6 | > 15.1 | > 14.9 | > 14.9 | | |
| Maximum Effective Power Per Port | | Watts | 200 | | | | | | |
| Inter/Intra Band Isolation | | dB | > 25 | | | | | | |

Standard values based on NGMN-P-BASTA version 9.6 recommendation.

| ELECTRICA | L SPECIFICATIONS Ultra V | Vide Band | | | Y2 | | | |
|---|--------------------------------|-----------|--------------|--------------|--------------|--------------|--------------|--|
| Frequency Range | | MHz | 1695-2690 | | | | | |
| | | MHz | 1695-1880 | 1850-1990 | 1920-2180 | 2300-2500 | 2490-2690 | |
| Polarization | | | | 1 | ±45° | ı | | |
| Gain | Over all Tilts | dBi | 16.6 ± 0.4 | 16.6 ± 0.5 | 16.7 ± 0.5 | 16.7 ± 0.5 | 16.8 ± 0.5 | |
| Azimuth Beamwidth | | degrees | 66.2° ± 4.5° | 66.8° ± 4.0° | 61.9° ± 4.3° | 64.3° ± 4.0° | 65.0° ± 4.2° | |
| Elevation Beamwidth | | degrees | 7.5° ± 0.6° | 6.9° ± 0.4° | 6.5° ± 0.5° | 5.7° ± 0.1° | 5.1° ± 0.4° | |
| Electrical Downtilt | | degrees | 0°-10° | | | | | |
| Impedance | | Ohms | 50 | | | | | |
| VSWR | | | < 1.5 | | | | | |
| Passive Intern 3rd Order for | nodulation 2 x 20W Carriers | dBm | < -110 | | | | | |
| Front-to-Back | Ratio, Total Power, ±30° | dB | > 24.9 | > 25.3 | > 25.2 | > 25.8 | > 25.5 | |
| Upper Sidelobe Suppression, Peak to 20° | | dB | > 16.1 | > 18.2 | > 18.6 | > 17.2 | > 16.9 | |
| Cross Polar Ratio - Main Direction (0°) | | dB | > 14.8 | > 15.4 | > 15.1 | > 14.9 | > 15.3 | |
| Maximum Effective Power Per Port | | Watts | 200 | | | | | |
| Inter/Intra Band Isolation | | dB | > 25 | | | | | |

Standard values based on NGMN-P-BASTA version 9.6 recommendation.



1915 mm

5963300

5963300G 5963300Dx

4-Band, 8-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 1915 mm

ELECTRICAL DOWNTILT CONTROL

| For multiband antennas, electrical downtilt for each band can be controlled separately. Tilt indicator(s) are covered by removable transparent cap(s). | | | | |
|--|--|--|--|--|
| Manual Electrical Tilt (MET) Control | A colored knob at the end of the tilt indicator allows change of the tilt without need of a tool. The knob color is identical to the corresponding connector color. To access the knob, remove the cap by turning it counter-clockwise. It is re-installed by opposite rotation. Do not remove the transparent cap(s) from the antenna. The manual tilt 'override' function is always available with no need to remove the physical RET motor. Do not remove the transparent cap(s) from the antenna. | | | |
| Remote Electrical Tilt (RET) Control | The remote control of the electrical tilt is managed by a Multi-Device Control Unit (MDCU) or a Multi-Device Dual Unit (MDDU) inserted in the bottom of the antenna. See details below and refer to the ordering options to see which actuators are available with this particular antenna. A single actuator individually controls the tilt of each band (no need for daisy chain cables between the bands). This module does not add any additional length to the antenna. For RET control, the transparent caps must be in place and locked. The tilt angle indicators always remain visible and the antenna still has manual tilt control (manual override). Do not remove the transparent cap(s) from the antenna. | | | |

RET ACTUATOR

Amphenol's **RET-READY** antennas are delivered with the RET Actuator already installed and pre-commissioned with all antenna parameters. Every RET device is factory configured and calibrated so the antenna is ready to be used once delivered to the site which means that there is no need for further installation of RET devices or for programming their configuration or for running a calibration process.

RET-READY ACTUATORS

Multi-Device Control Unit (MDCU). The MCDU is an electronic module that allows the remote control of the electrical downtilt (RET) in Amphenol antennas with factory embedded motors. The MDCU is factory installed. Refer to the ORDERING OPTIONS for availability with this model.

Multi-Device Dual Unit (MDDU). The MDDU allows two separate RET Controllers to independently drive the RETs in antennas with factory embedded motors (for antenna sharing or two technologies). The MDDU is factory installed. Refer to the ORDERING OPTIONS for availability with this model.


| Number of RET-READY Actuators | | One per antenna | | |
|---|------|--|--|--|
| Input Voltage | | +10 to +30 V | | |
| Power Consumption Idle State (AISG P1) High Power Mode (AISG P2) | | 0.5 W | | |
| | | 3 W | | |
| Protocol | | 3GPP/AISG 2.0 | | |
| Tilt Change Duration | | Less than 15 seconds, typical (may vary dependent on antenna type and outdoor temperature) | | |
| Precision | | ±0.5° | | |
| Tilt Change Capability | | 50,000 minimum | | |
| DET late of a s | MDCU | One pair of AISG Male and Female (type IEC60130-9) | | |
| RET Interface | MDDU | Two male AISG 8 pin connectors (type IEC60130-9 Ed 3.0) | | |
| Field Replaceable Unit | | Yes | | |

1915 mm

5963300

5963300G 5963300Dx

4-Band, 8-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 1915 mm

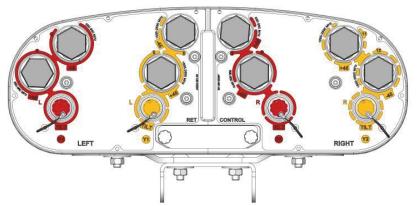

| | ARRAY | FREQUENCY | CONNECTOR | CONNECTOR TYPE |
|-------|-------|-----------|-----------|---------------------------|
| AYOUT | ■ R1 | 698-960 | 1-2 | 7/16-DIN Female Long Neck |
| | ■ R2 | 698-960 | 3-4 | 7/16-DIN Female Long Neck |
| ARRAY | Y1 | 1695-2690 | 5-6 | 7/16-DIN Female Long Neck |
| | Y2 | 1695-2690 | 7-8 | 7/16-DIN Female Long Neck |




Diagram shown at right depicts the view from the front of the antenna.

The illustration is not shown to scale.

MECHANICAL SPECIFICATIONS

| WECHANICAE SE ECIFICATIONS | | | | | |
|--|---|--|---|--|--|
| 1 | | mm (in) | 1915 (75.4) | | |
| Width | | mm (in) | 432 (17.0) | | |
| | | mm (in) | 153 (6.0) | | |
| eight - Antenna Only | | kg (lbs) | 33 (72.8) | | |
| anical Distance Betwee | en Mounting Points | mm (in) | Refer to Diagram | | |
| oad | Calculation | km/h (mph) | 150 (93.2) | | |
| | Frontal | N (lbf) | 635 (142.8) | | |
| Trina raimer dediniciones, | Lateral | N (lbf) | 395 (88.8) | | |
| | Rearside | N (lbf) | 656 (147.5) | | |
| tional Wind Speed | | km/h (mph) | 160 (99.4) | | |
| al Wind Speed | | km/h (mph) | 200 (124) | | |
| ne Color | | | Gray RAL7035 | | |
| ne Material | | | Outdoor Fibreglass | | |
| Lightning Protection | | | Direct Ground | | |
| Shipping Dimensions (Length x Width x Depth) | | mm (in) | 2150 x 550 x 280 (84.6 x 21.7 x 11.0) | | |
| Shipping Weight | | kg (lbs) | 43 (94.8) | | |
| Shipping Dimensions (Length x Width x Depth) Shipping Weight Shipping Volume | | m³ (ft³) | 0.33 (11.7) | | |
| | reight - Antenna Only anical Distance Between ad 191-1-4:2005 using Tunnel Coefficients) tional Wind Speed al Wind Speed al Wind Speed are Color are Material aring Protection Shipping Dimension Shipping Weight | reight - Antenna Only Inical Distance Between Mounting Points Dad 191-1-4:2005 using Tunnel Coefficients) Frontal Lateral Rearside Itional Wind Speed All Wind Speed The Color The Material The | mm (in) mm (in) mm (in) mm (in) mm (in) kg (lbs) mical Distance Between Mounting Points mm (in) cad polarical Distance Between Mounting Points Calculation Frontal Lateral N (lbf) Rearside N (lbf) Rearside N (lbf) km/h (mph) he Color he Material ing Protection Shipping Dimensions (Length x Width x Depth) mm (in) mm (in) kg (lbs) | | |



1915 mm

5963300

5963300G 5963300Dx

4-Band, 8-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 1915 mm

ENVIRONMENTAL SPECIFICATIONS

| Environmental | | ETS 300 019 |
|----------------------------------|-----------|------------------------------|
| Operating Temperature | ° C (° F) | -40° to +60° (-40° to +140°) |
| Product Environmental Compliance | | Product is RoHs Compliant |

ACCESSORIES All accessories are ordered separately unless otherwise indicated

| ITEM | MODEL NUMBER | WEIGHT |
|---|--------------|------------------|
| Brackets for pole Ø48 to Ø115 mm (Ø1.9 to Ø4.5 in) <i>delivered as standard</i> | 0900181/00 | 3.4 kg (7.5 lbs) |
| Brackets for pole Ø70 to Ø150 mm (Ø2.8-Ø5.9 in) <i>optional</i> | 0900182/00 | 3.9 kg (8.6 lbs) |
| Kit to add mechanical tilt (0° to 10°) to above brackets <i>optional</i> | 0900397/00 | 3.0 kg (6.6 lbs) |

Wall mounting brackets are available upon request

INSTALLATION Please read all installation notes before installing this product.



Always attach the antenna by all mounting points.

Do not install the antenna with the connectors facing upwards.

Do not cut the tethered transparent cap(s) that cover the antenna's tilt adjustment indicators.

In order to operate the RET control, the transparent caps covering the tilt adjustment indicators must be engaged and locked.

Dimensions shown in mm

