


6208712ENv

Dual Band | Twin Beam | 8-Port | Panel Antenna | (2x) X-Pol | 35° | 2100 mm

- Dual band, Twin beam antenna, Dual polarisation, 8 connectors
- Independent tilt on each band 2-12°
- RET version, 3GPP/AISG2.0 with integrated RCU
- Mounting and downtilt brackets included

PRODUCT OVERVIEW	Frequency Range (MHz)	1710-2690	1710-2690	1710-2690	1710-2690
	Array	■ Y1	■ Y2	■ Y3	■ Y4
	Connector Position	1-2	3-4	5-6	7-8
	Polarization	XPOL	XPOL	XPOL	XPOL
	Azimuth Beamwidth	35°	35°	35°	35°
	Electrical Downtilt	2-12° (Step 1°)	2-12° (Step 1°)	2-12° (Step 1°)	2-12° (Step 1°)
	Dimensions	2100 x 360 x 159 mm			

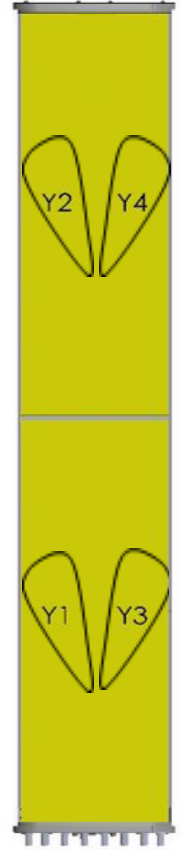

ORDERING OPTIONS

Select from the different options listed below

SELECT ELECTRICAL DOWNTILT CONTROL & AISG PROTOCOL	SELECT ACTUATOR	SELECT CONNECTOR TYPE	ANTENNA MODEL NUMBER
Manual Electrical Tilt (MET)	---	4.3-10 Female	6208712ENv
Remote Electrical Tilt (RET) AISG v2.0 / 3GPP	Multi-Device Control Unit (MDCU)	4.3-10 Female	6208712ENGv



Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6208712ENv

Dual Band | Twin Beam | 8-Port | Panel Antenna | (2x) X-Pol | 35° | 2100 mm

ELECTRICAL SPECIFICATIONS Ultra Wide Band

■ Y1, Y2

Frequency Range	MHz	1710-2690		
	MHz	1710-1880	1920-2170	2500-2690
Polarization	---	± 45°		
Gain (Peak)	dBi	18.6	18.9	19.4
Gain (Average)	dBi	18.3 ± 0.3	18.8 ± 0.3	19.3 ± 0.3
Azimuth Beamwidth	degrees	-39.0 ± 3.0	-37.0 ± 3.0	-35.0 ± 3.0
Elevation Beamwidth	degrees	8.3 ± 0.5	7.5 ± 0.5	6.5 ± 0.5
Beam Azimuth Direction	degrees	+29° ± 3°		
Electrical Downtilt	degrees	2-12° (Step 1°)		
Impedance	Ohms	50		
VSWR	---	< 1.5		
Passive Intermodulation	dBc	< -150		
Front-to-Back Ratio Co-Pol, ±30°	dB	> 28		
First Upper Sidelobe Suppression	dB	> 16		
Cross Polar Discrimination @ Main Direction (0°)	dB	> 15		
Efficiency	dB	-1.5	-1.5	-1.8
Efficiency Average	%	72	71	65
Maximum Effective Power Per Port	Watts	200		
Beam to Beam Isolation	dB	> 25		
Intra/Cross Polar Band Isolation	dB	> 25		

Standard values based on NGMN-P-BASTA version 12.0 recommendation.

ELECTRICAL SPECIFICATIONS Ultra Wide Band

■ Y3, Y4

Frequency Range	MHz	1710-2690		
	MHz	1710-1880	1920-2170	2500-2690
Polarization	---	± 45°		
Gain (Peak)	dBi	18.6	18.9	19.4
Gain (Average)	dBi	18.3 ± 0.3	18.8 ± 0.3	19.3 ± 0.3
Azimuth Beamwidth	degrees	+39.0 ± 3.0	+37.0 ± 3.0	+35.0 ± 3.0
Elevation Beamwidth	degrees	8.3 ± 0.5	7.5 ± 0.5	6.5 ± 0.5
Beam Azimuth Direction	degrees	-29° ± 3°		
Electrical Downtilt	degrees	2-12° (Step 1°)		
Impedance	Ohms	50		
VSWR	---	< 1.5		
Passive Intermodulation	dBc	< -150		
Front-to-Back Ratio Co-Pol, ±30°	dB	> 28		
First Upper Sidelobe Suppression	dB	> 16		
Cross Polar Discrimination @ Main Direction (0°)	dB	> 15		
Efficiency	dB	-1.5	-1.5	-1.8
Efficiency Average	%	72	71	65
Maximum Effective Power Per Port	Watts	200		
Beam to Beam Isolation	dB	> 25		
Intra/Cross Polar Band Isolation	dB	> 25		

Standard values based on NGMN-P-BASTA version 12.0 recommendation.

Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6208712ENv

Dual Band | Twin Beam | 8-Port | Panel Antenna | (2x) X-Pol | 35° | 2100 mm

ELECTRICAL DOWNTILT CONTROL

For multiband antennas, electrical downtilt for each band can be controlled separately.

Manual Electrical Tilt (MET) Control	The MET is a separate kit provided on the bottom of the antenna. This kit has colored knobs with a respective array identification indicated within it. This knob can be rotated to set an electrical downtilt as per the requirement. The tilt information of the respective arrays can be observed with an indicator provided near the knob.
Remote Electrical Tilt (RET) Control	The remote control of the electrical tilt is managed by a Multi-Device Control Unit (MDCU) inserted in the bottom of the antenna. See details below and refer to the ordering options to see which actuators are available with this particular antenna. A single actuator individually controls the tilt of each band (no need for daisy chain cables between the bands). This module does not add any additional length to the antenna.

RET ACTUATOR

Amphenol's **RET-READY** antennas are delivered with the RET Actuator already installed and pre-commissioned with all antenna parameters. Every RET device is factory configured and calibrated so the antenna is ready to be used once delivered to the site which means that there is no need for further installation of RET devices.

Number of RET-READY Actuators	One per antenna	
Input Voltage	+10 to +30 V	
Power Consumption	Idle State	0.5 W
	Operating	4 W typical / 10 W maximum
Protocol	3GPP/AISG 2.0	
Tilt Change Duration	Less than 15 seconds, typical (may vary dependent on antenna type and outdoor temperature)	
Precision	± 0.5°	
Tilt Change Capability	50,000 minimum	
RET Interface	1 pair of AISG Male and Female (type IEC60130-9)	
Field Replaceable Unit	Yes	
Remote Control	Capable of Controlling from OMC or BTS/ NodeB or External Tools	

ENVIRONMENTAL SPECIFICATIONS


Environmental Standard	---	ETS 300 019
Lightning Protection	---	Direct Ground
Operating Temperature	° C (° F)	-40° to +60° (-40° to 140°)
Product Environmental Compliance (2011/65/EU, EN 60950-1 & EN 60950-22)	---	Product is RoHs Compliant

ACCESSORIES All accessories are ordered separately unless otherwise indicated

ITEM	MODEL NUMBER	WEIGHT
Brackets for pole Ø48 to Ø115 mm (Ø1.9 to Ø4.5 in) with mechanical tilt (0° to 10°)	IA00483	5.0 kg (11.0 lbs)


Wall mounting brackets are available upon request

INSTALLATION Please read all installation notes before installing this product.

	Always attach the antenna by all mounting points.
	Do not install the antenna with the connectors facing upwards.

6208712ENv

Dual Band | Twin Beam | 8-Port | Panel Antenna | (2x) X-Pol | 35° | 2100 mm

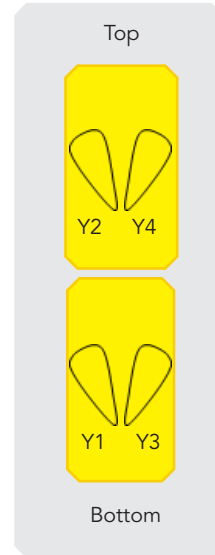

ARRAY LAYOUT	ARRAY	FREQUENCY	CONNECTOR	CONNECTOR TYPE
	■ Y1	1710-2690	1-2	4.3-10 Female
	■ Y2	1710-2690	3-4	4.3-10 Female
	■ Y3	1710-2690	5-6	4.3-10 Female
	■ Y4	1710-2690	7-8	4.3-10 Female

Diagram shown at right depicts the view from the front of the antenna. The illustration is not shown to scale.

MECHANICAL SPECIFICATIONS

Length	mm (in)	2100 (82.6)	
Width	mm (in)	360 (14.1)	
Depth	mm (in)	159 (6.2)	
Net Weight - Antenna Only	kg (lbs)	≈30 (66.1)	
Mechanical Distance Between Mounting Points	mm (in)	1700 (66.9)	
Survival Wind Speed	km/h	200 (124)	
Windload (EN 1991-1-4:2005 using Wind Tunnel Coefficients)	Calculation	km/h	150 (93.2)
	Frontal	N (lbf)	823 (185.0)
	Lateral	N (lbf)	232 (52.1)
	Rearside	N (lbf)	1042 (234.2)
Reflector Material	---	Aluminium	
Radiator Material	---	Aluminium and Low loss circuit board	
Radome Material	---	Fiberglass (UV, Resistant)	
Radome Color	---	Gray RAL7035	
Shipping Dimensions (Length x Width x Depth)	mm (in)	2272 x 457 x 304 (89.4 x 17.9 x 11.9)	
Shipping Weight	kg (lbs)	≈38 (83.7)	

Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.