

HEX856CU0000x

Features

- Ultra wide-band, AWS-3 Ready
- 4x4 MIMO high band compatible
- Patented internal RET actuator adds no additional length to the antenna
- Can be ordered with a Multi-Device Dual Unit (MDDU) with two separate inputs for independent control of each band

PRODUCT OVERVIEW	Frequency Range (MHz)	(1x) 696-960	(2x) 1695-2400
	Array	■ R1	■ Y1 ■ Y2
	Connector	2 PORTS	4 PORTS
	Polarization	XPOL	XPOL
	Azimuth Beamwidth (avg)	85°	85°
	Electrical Downtilt	0-12°	0-10°
	Maximum Continuous Power Per Port @ 50° C (122° F)	500 W	250 W
	Maximum Total Continuous Power at 50° C (122° F)	1000 W	1000 W
	Connector Type	(6x) 7/16-DIN FEMALE CONNECTORS	
	Dimensions	1906 x 305 x 180 mm (75.0 x 12.0 x 7.1 in)	



ELECTRICAL SPECIFICATIONS

■ R1

Frequency Range		MHz	(1x) 696-960	
Frequency Sub-Range		MHz	696-806	806-960
Polarization		---	(1x) ±45°	
Gain		dBi	13.7	14.3
Azimuth Beamwidth (3 dB)		degrees	81°	82°
Elevation Beamwidth (3 dB)		degrees	11.6°	10.1°
Electrical Downtilt		degrees	0-12°	
Impedance		Ohms	50Ω	
VSWR		---	< 1.5:1	
Passive Intermodulation 3rd Order for 2x20 W Carriers		dBc	< -153	
Front-to-Back Ratio		dB	> 30	
Upper Sidelobe Suppression		dB	> 17 Typical	
Isolation	In-Band	dB	> 23	
	Between Ports	dB	> 30	

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


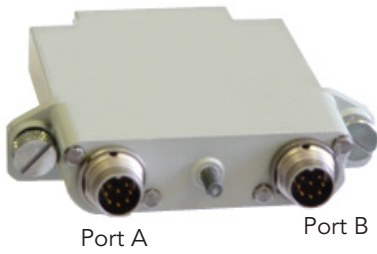
HEX856CU0000x

ELECTRICAL SPECIFICATIONS

■ Y1 ■ Y2

Frequency Range	MHz	(2x) 1695-2400			
Frequency Sub-Range	MHz	1695-1850	1850-1990	2100-2180	2200-2400
Polarization	---	(2x) $\pm 45^\circ$			
Gain	dBi	15.9	16.0	15.8	16.0
Azimuth Beamwidth (3 dB)	degrees	79°	81°	84°	79°
Elevation Beamwidth (3 dB)	degrees	5.5°	5.1°	4.8°	4.6°
Electrical Downtilt	degrees	0-10°			
Impedance	Ohms	50Ω			
VSWR	---	< 1.5:1			
Passive Intermodulation 3rd Order for 2x20 W Carriers	dBc	< -153			
Front-to-Back Ratio	dB	> 25			
Upper Sidelobe Suppression	dB	> 18 Typical			
Isolation	In-Band	dB	> 25		
	Between Ports	dB	> 30		

ELECTRICAL DOWNTILT CONTROL

Manual Electrical Tilt (MET) Control	Electrical downtilt for each band can be controlled separately. A colored knob at the end of the tilt indicator allows change of the tilt without need of a tool. The knob color is identical to the corresponding connector ring color. To access the knob, remove the cap by turning it counter-clockwise. It is re-installed by opposite rotation. Do not remove the transparent cap(s) from the antenna.	
Remote Electrical Tilt (RET) Control	Electrical downtilt for each band can be controlled separately. The remote control of the electrical tilt is managed by either a Multi-Device Control Unit (MDCU) or a Multi-Device Dual Unit (MDDU) inserted in the bottom of the antenna. A single actuator individually controls the tilt of each band (no need for daisy chain cables between the bands). This module does not add any additional length to the antenna. For RET control, the transparent caps must be in place and locked. The tilt angle indicators always remain visible and the antenna still has manual tilt control (manual override). Do not remove the transparent cap(s) from the antenna.	
RET Actuators (Units are Field Replaceable)	Multi-Device Control Unit (MDCU) An electronic module that allows the remote control of the electrical downtilt (RET) in Amphenol antennas with factory embedded motors. The MDCU is factory installed.	Multi-Device Dual Unit (MDDU) Allows two separate RET Controllers to independently drive the RETs in Amphenol antennas with factory installed motors (for antenna sharing). The MDDU is factory installed. Refer to Ordering Options for unique AISG port configurations
		 <p>Port A Port B</p> <p>Two separate inputs for independent control of each band</p>


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

HEX856CU0000x

MECHANICAL SPECIFICATIONS

Antenna	Length	mm (in)	1906 (75.0)
	Width	mm (in)	305 (12.0)
	Depth	mm (in)	180 (7.1)
Net Weight - Antenna Only		kg (lbs)	16.6 (36.6)
Net Weight - Antenna with Mounting Kit MKS09P02		kg (lbs)	20.7 (45.6)
Net Weight - Antenna with Mounting Kit MKS09T02		kg (lbs)	23.0 (50.7)
Windload	Calculation	km/h (mph)	160 (100)
	Frontal	N (lbf)	707 (159)
	Side	N (lbf)	419 (94)
Survival Wind Speed		km/h (mph)	241 (150)
Connector	Type	---	7/16-DIN Female
	Quantity	---	6
	Position	---	Bottom
Radome Color		---	Grey
Operating Temperature		degrees	-40 to +60 C (-40 to +140 F)
Lightning Protection (Grounding Type)		---	Direct Ground

HEX856CU0000x

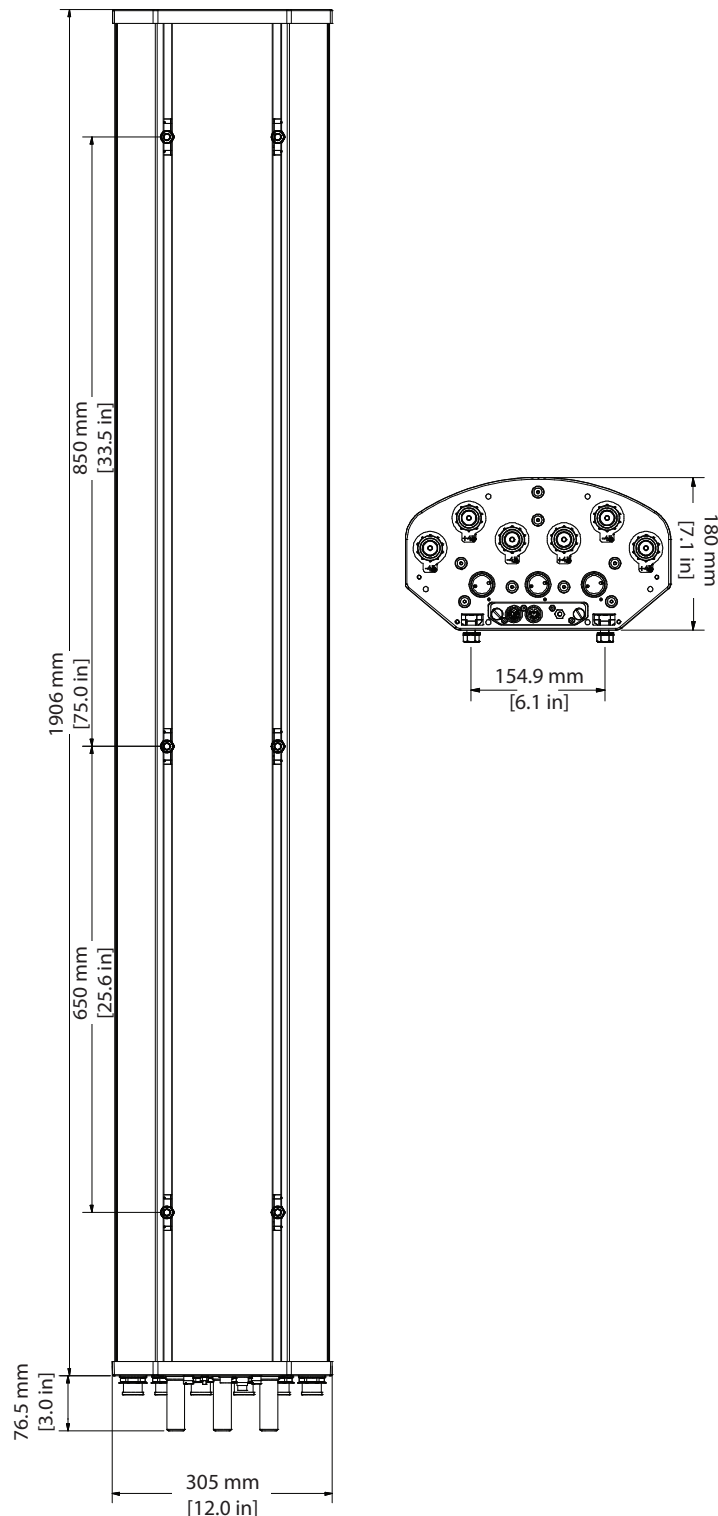


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

HEX856CU0000x


ARRAY LAYOUT Topology

FREQUENCY	ARRAY	CONNECTOR	CONNECTOR TYPE
696-960 MHz	■ R1	1-2	(2x) 7/16-DIN Female
1695-2700 MHz	■ Y1	3-4	(2x) 7/16-DIN Female
1695-2700 MHz	■ Y2	5-6	(2x) 7/16-DIN Female

The illustration at right is not shown to scale.

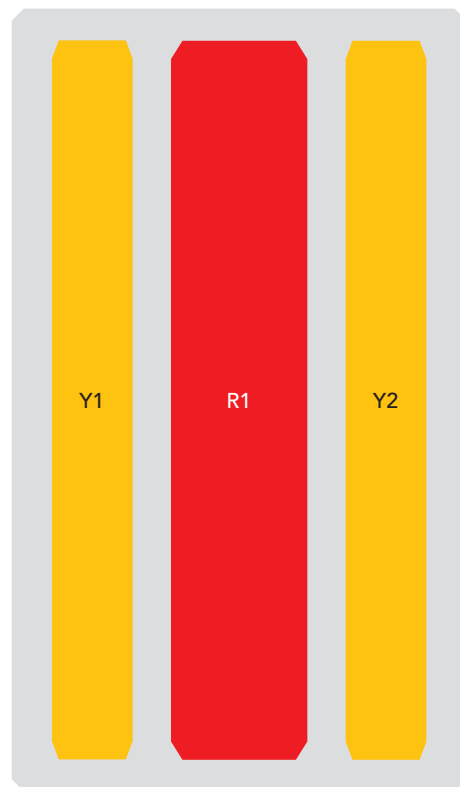



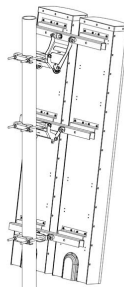
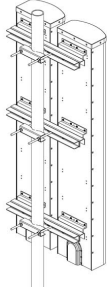
BOTTOM VIEW - LABELING

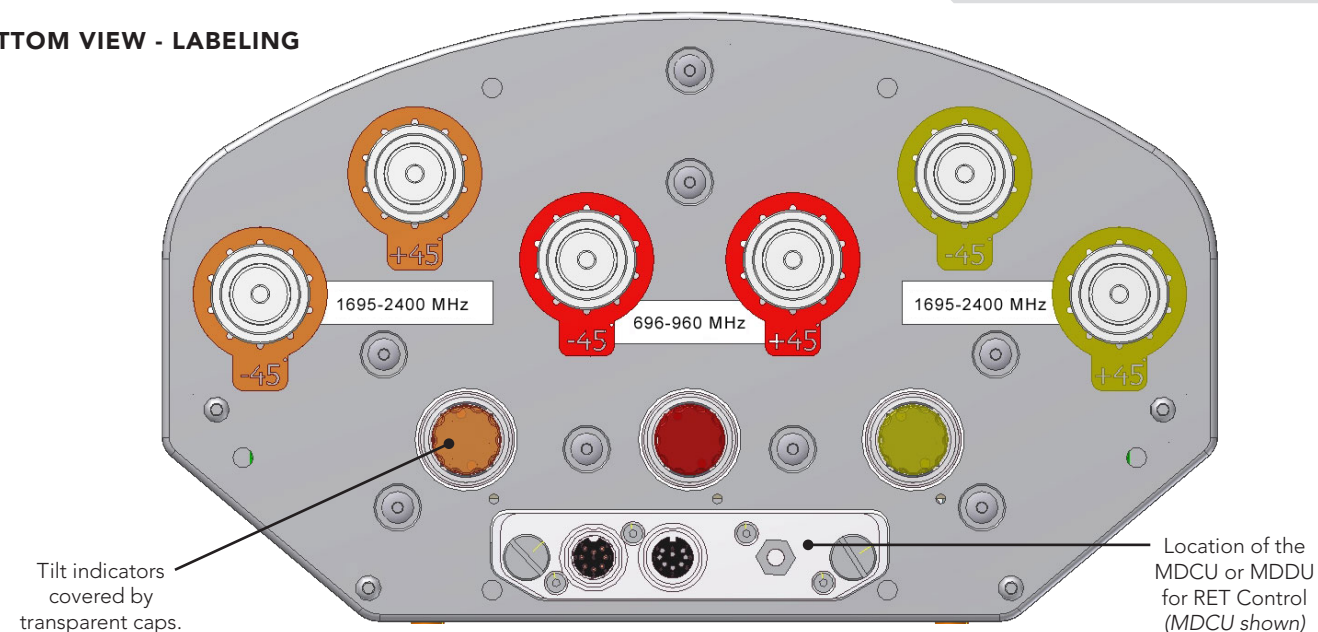

In order to operate RET control, the transparent caps covering the tilt adjustment indicators must be engaged and locked. Do not cut them from the antenna.

HEX856CU0000x

MOUNTING KITS The default mounting kit is included in the price of the antenna. Any other mounting kits are optional and must be ordered separately.

TYPE		MODEL NUMBER	DESCRIPTION	FITS PIPE DIAMETER	WEIGHT
DEFAULT MOUNTING KIT <i>Shipped as standard and included in the price of the antenna</i>		MKS09T02	3-Point Pole Mounting & Downtilt Bracket Kit	50-115 mm (2.0-4.5 in)	6.4 kg (14 lbs)
OPTIONAL MOUNTING KITS <i>Must order separately</i>		MKS09P02	3-Point Pole Mounting Bracket Kit	50-115 mm (2.0-4.5 in)	4.1 kg (9 lbs)
		MKS09T07TWIN	3-Point Dual Antenna Extended Scissor Tilt Mounting Bracket Kit	50-115 mm (2.0-4.5 in)	36.1 kg (80 lbs)
		MKS09P07TWIN	3-Point Dual Antenna Pole Mounting Bracket Kit	50-115 mm (2.0-4.5 in)	TBD

INSTALLATION Please read all installation notes before installing this product.



Always attach the antenna using all mounting points.

Do not install the antenna with the connectors facing upwards.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

HEX856CU0000x

HOW TO READ THE MODEL NUMBER

Each letter and number has meaning.

ANTENNA TYPE OR NUMBER OF PORTS	AZIMUTH BEAMWIDTH	LENGTH IN FEET	OPERATING FREQUENCY		ANTENNA VARIATION	ELECTRICAL DOWNTILT CONTROL
HEX	85	6	C	U	0000	x
Hex (6) Port Panel	85°	~ 6 feet	696-960	1695-2400	<p>Variations of the same antenna or similar antennas may be available.</p> <p>Refer to the data sheets to compare different variations.</p> <p>In this instance, 0000 indicates this is the original design</p>	<p>Replace "x" in the model number with the type of electrical downtilt control.</p> <p>M indicates the model is available with manual electrical tilt (MET).</p> <p>G indicates the antenna is equipped with a Multi-Device Control Unit for remote electrical tilt (RET).</p> <p>L indicates the antenna is equipped with a Multi-Device Dual Unit for remote electrical tilt (RET).</p> <p>See additional ordering options below.</p>

ORDERING OPTIONS


Select from the following ordering options

SELECT ELECTRICAL TILT TYPE	ACTUATOR DESCRIPTION	SELECT RET ACTUATOR PORT CONFIGURATION		ANTENNA MODEL NUMBER
		Port A	Port B	
Manual Electrical Tilt	---	---	---	HEX856CU0000M
Remote Electrical Tilt AISG v2.0 / 3GPP with an MDCU RET ACTUATOR	The MDCU (Multi-Device Control Unit) is an electronic module that allows the remote control of the electrical downtilt (RET) in Amphenol antennas with factory embedded motors. The MDCU is factory installed.	---	---	HEX856CU0000G
Remote Electrical Tilt AISG v2.0 / 3GPP with an MDDU RET Actuator	The MDDU (Multi-Device Dual Unit) allows two separate RET Controllers to independently drive the RETs in Amphenol antennas with factory installed motors (for antenna sharing). The MDDU is factory installed.	<div>■ R1</div> 696-960 MHz	<div>■ Y1 / ■ Y2</div> 1695-2400 / 1695-2400 MHz	HEX856CU0000L
		<div>■ Y2</div> 1695-2400 MHz	<div>■ Y1 / ■ R1</div> 1695-2400 / 696-960 MHz	HEX856CU0000L1
		<div>■ Y1</div> 1695-2400 MHz	<div>■ Y2 / ■ R1</div> 1695-2400 / 696-960 MHz	HEX856CU0000L2

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

HEX856CU0000x

696-960 MHz

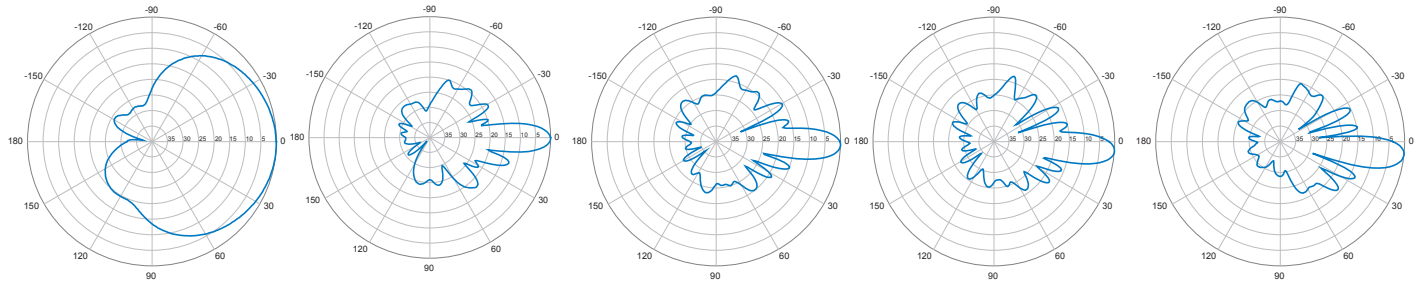


Horizontal | 750 MHz

0° | Vertical | 750 MHz

2° | Vertical | 750 MHz

4° | Vertical | 750 MHz

6° | Vertical | 750 MHz

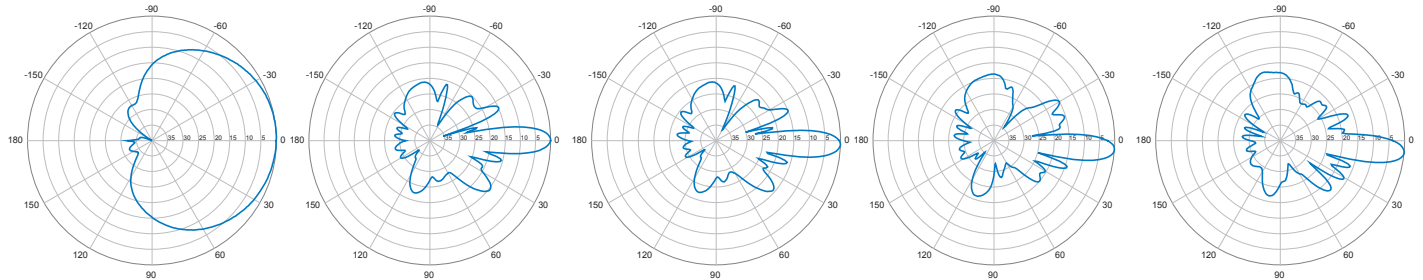


Horizontal | 850 MHz

0° | Vertical | 850 MHz

2° | Vertical | 850 MHz

4° | Vertical | 850 MHz


6° | Vertical | 850 MHz

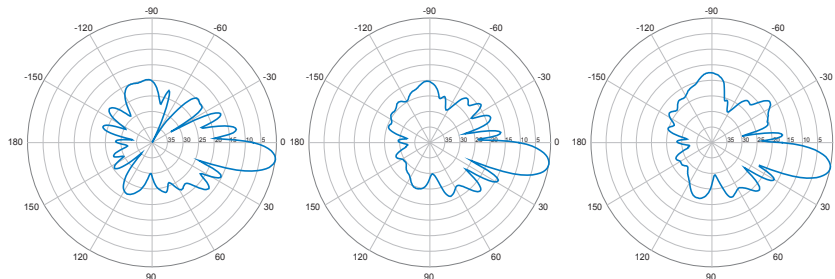

8° | Vertical | 750 MHz

10° | Vertical | 750 MHz

12° | Vertical | 750 MHz

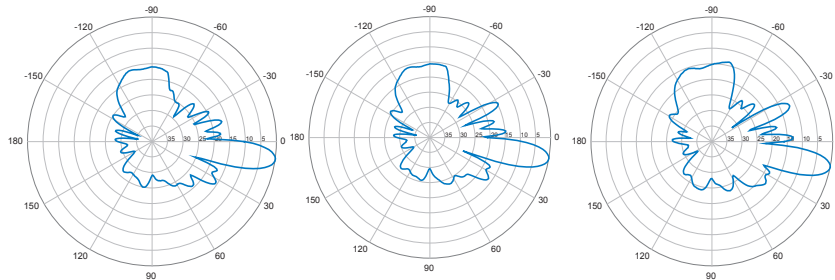

8° | Vertical | 850 MHz


10° | Vertical | 850 MHz

12° | Vertical | 850 MHz

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

HEX856CU0000x


1695-2400 MHz

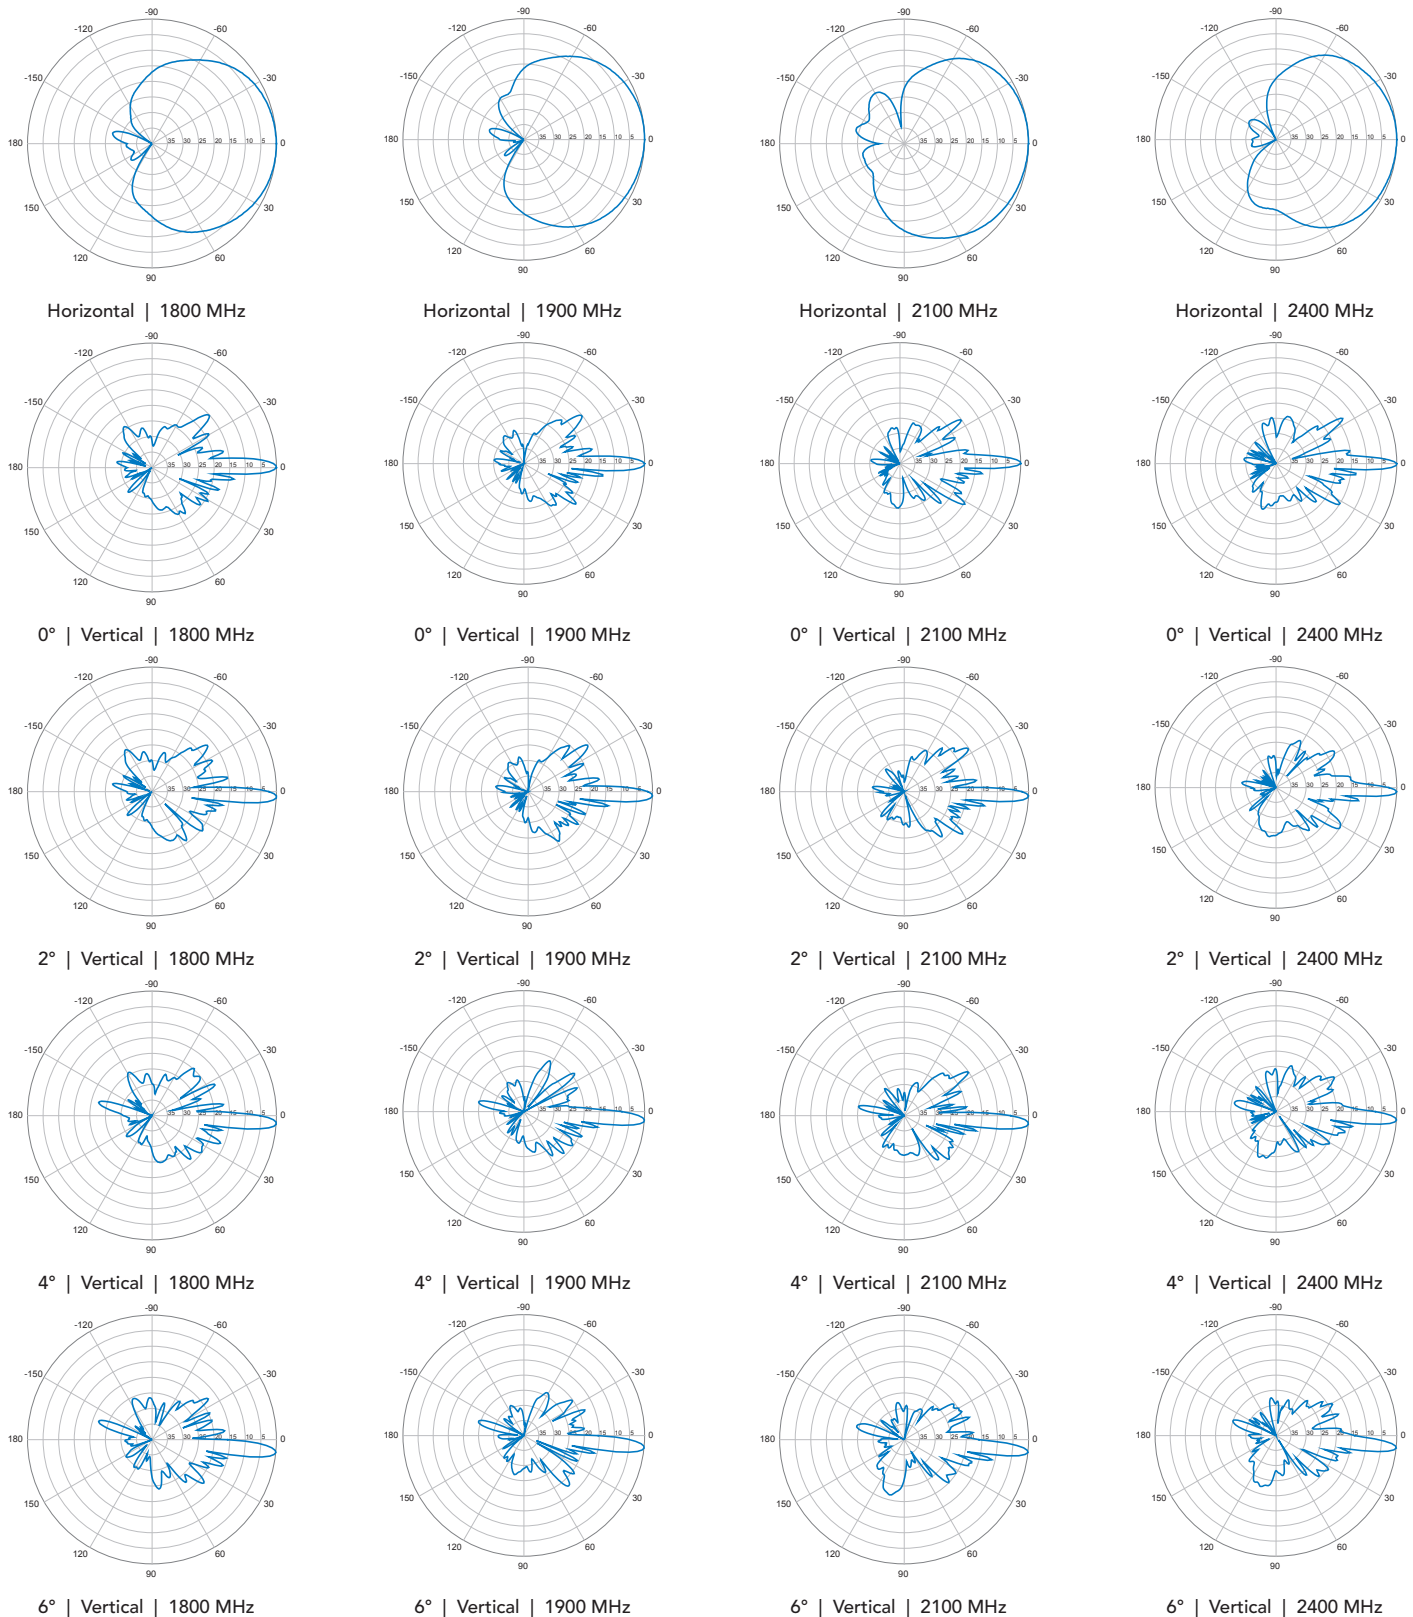


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

HEX856CU0000x


1695-2400 MHz




8° | Vertical | 1800 MHz




8° | Vertical | 1900 MHz




8° | Vertical | 2100 MHz




8° | Vertical | 2400 MHz




10° | Vertical | 1800 MHz



10° | Vertical | 1900 MHz



10° | Vertical | 2100 MHz



10° | Vertical | 2400 MHz