

QUAD BAND | 8-PORT | WITH INTERNAL SMART BIAS-T | XXXX-POL | 68° / 63° / 65° / 65° | 13.8 / 14.7 / 17.5 / 17.5 DBI


Features

- Quad band, 8-port panel with variable electrical tilt
- Features three internal Smart Bias-T units
- Ultra-wideband frequency
- 4x4 MIMO high band compatible
- Independent lowband (R1 & R2) tilt and combined highband (Y1 & Y2) tilt


Connector Description

The antenna has eight (8) connectors located at the bottom.

Low Band #1	R1	696-798 MHz	Ded Divers	(4.) 7/1/ DIN Famala
Low Band #2	R2	824-900 MHz	Red Rings	(4x) 7/16-DIN Female
High Band #1	Y1	1695-2400 MHz	Vallaus Dia su	(A.) 7/1/ DIN Famala
High Band #2	Y2	1695-2400 MHz	Yellow Rings	(4x) 7/16-DIN Female



Electrical Characteristics	R1	R2	Y1 and Y2			
Francis Brade (MIL)	696-798	824-900	(2x) 1695-2400 MHz			
Frequency Bands (MHz)	696-798		1695-1850	1850-1990	2100-2180	2200-2400
Polarization	±45°	±45°	(2x) ±45°			
Horizontal Beamwidth	68°	63°	65°	63°	60°	57°
Vertical Beamwidth	11.7°	9.7°	6.0°	5.5°	5.0°	4.8°
Gain	13.8 dBi	14.7 dBi	16.7 dBi	16.9 dBi	17.2 dBi	17.5 dBi
Electrical Downtilt	0-12°	0-12°	0-10°			
Impedance	50Ω	50Ω	50Ω			
VSWR	< 1.5:1	< 1.5:1	< 1.5:1			
Upper Sidelobe Suppression (Typical)	> 17 dB	> 17 dB	> 18 dB			
Front-to-Back Ratio	> 30 dB	> 30 dB	> 25 dB			
In-Band Isolation	> 23 dB	> 23 dB	> 25 dB			
Isolation Between Ports	> 30 dB	> 30 dB	> 30 dB			
IM3 (2x20W carrier)	< -153 dBc	< -153 dBc	< -153 dBc			
Input Power	(2x) 500 W	(2x) 500 W	(4x) 250 W			
Diplexed	No					
Lightning Protection	Direct Ground					
Operating Temperature	-40° to +60° C (-40° to +140° F)					








QUAD BAND | 8-PORT | WITH INTERNAL SMART BIAS-T | XXXX-POL | 68° / 63° / 65° / 65° | 13.8 / 14.7 / 17.5 / 17.5 DBI


Dimension	ons (Lenath	x Width x [Denth)	1897 x 350 x 204	mm	74.7 x 13.8 x 8.0	in		
Dimensions (Length x Width x Depth)									
	Antenna Only			33.6	kg	74.0	lbs		
		enna with Mounting owntilt Bracket Kit 10008		40.5	kg	89.2	lbs		
Survival \	Wind Speed			241	km/hr	150	mph		
Wind Loads (160 km/hr or 100 mph) Front Side		Front	890	890 N		lbf			
		nph) Side		473 N		106	lbf		
Electr	ical Dov	vntilt C	ontrol						
Manual Electrical Tilt (MET) Control		A colored knob at the end of the tilt indicator allows change of the tilt without need of a tool. The knob color is identical to the corresponding connector ring color. To access the knob, remove the cap by turning it counterclockwise. It is re-installed by opposite rotation. Do not remove the transparent cap(s) from the antenna.							
Remote Electrical Tilt (RET) Control			ntrol	For RET control, the transparent caps must be in place and locked. The tilt angle indicators always remain visible. Do not remove the transparent cap(s) from the antenna.					
RET A	ctuator								
Input Vol	tage				10-30 Vdc				
Power		Idle State		0.5 W (Maximum)					
Consump	Normal Conditions		Conditions	10.0 W (Maximum)					
Consum	Protocol			3GPP/AISG v2.0 (Single RET)					
'				(3x) 8-pin DIN Female					
'	face				(3x) 8-pin DIN Fe	emale			

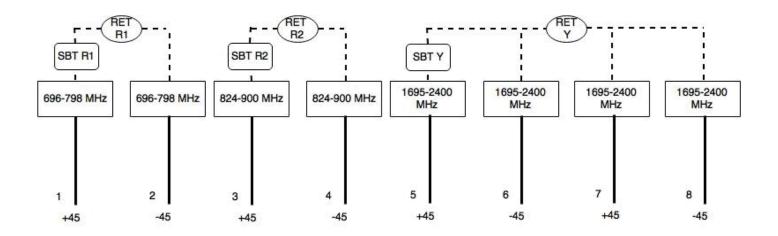

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Modifications to product may result in changes to this document without notice.



QUAD BAND | 8-PORT | WITH INTERNAL SMART BIAS-T | XXXX-POL | 68° / 63° / 65° / 65° | 13.8 / 14.7 / 17.5 / 17.5 DBI

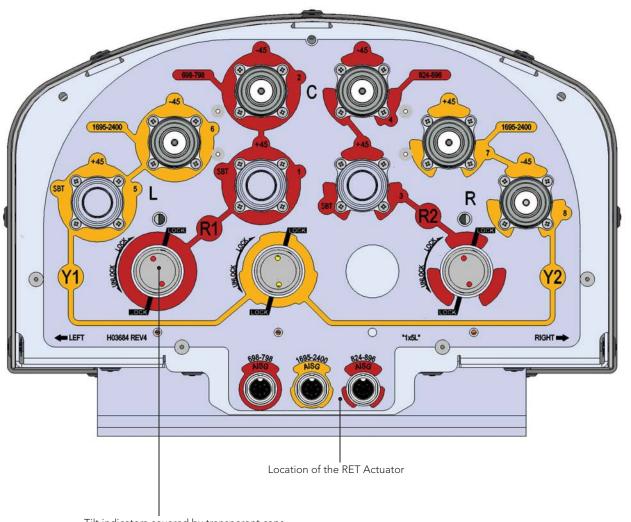


Tilt indicators covered by transparent caps. Knob colors are the same as the connectors.



In order to operate RET control, the transparent caps covering the tilt adjustment indicators must be engaged and locked. Do not cut them from the antenna.




QUAD BAND | 8-PORT | WITH INTERNAL SMART BIAS-T | XXXX-POL | 68° / 63° / 65° / 65° | 13.8 / 14.7 / 17.5 / 17.5 DBI

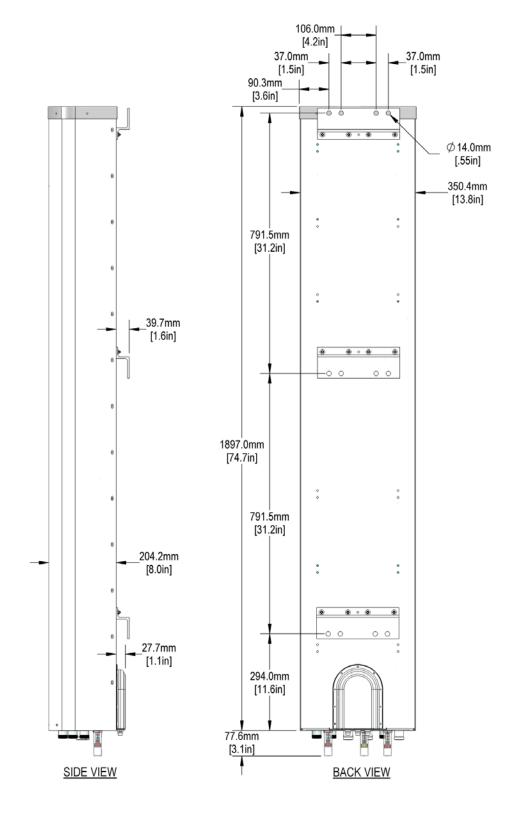


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Modifications to product may result in changes to this document without notice.



QUAD BAND | 8-PORT | WITH INTERNAL SMART BIAS-T | XXXX-POL | 68° / 63° / 65° / 65° | 13.8 / 14.7 / 17.5 / 17.5 DBI

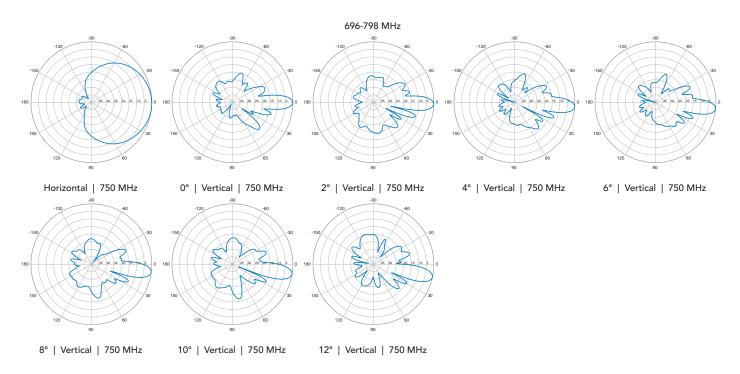


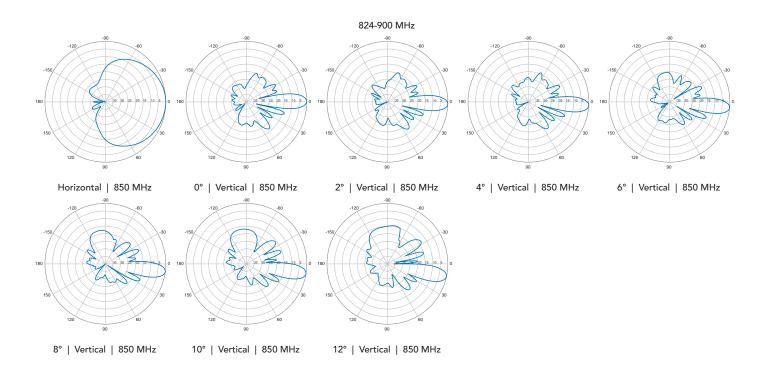

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/orstress on structural supports is beyond our control. Such conditions may result in damage to this product. Modifications to product may result in changes to this document without notice.




QUAD BAND | 8-PORT | WITH INTERNAL SMART BIAS-T | XXXX-POL | 68° / 63° / 65° / 65° | 13.8 / 14.7 / 17.5 / 17.5 DBI

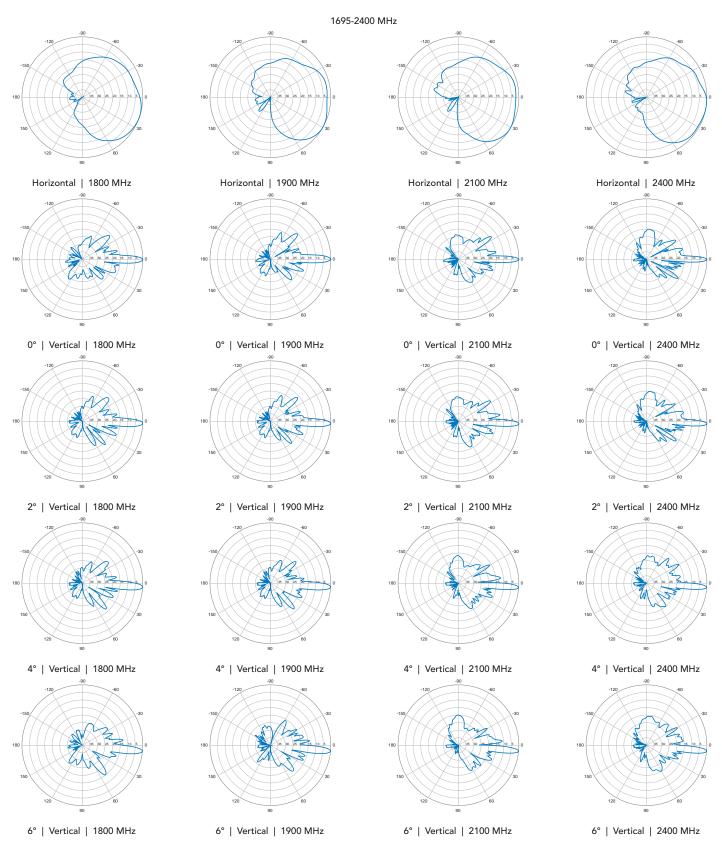

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Modifications to product may result in changes to this document without notice.



QUAD BAND | 8-PORT | WITH INTERNAL SMART BIAS-T | XXXX-POL | 68° / 63° / 65° / 65° | 13.8 / 14.7 / 17.5 / 17.5 DBI

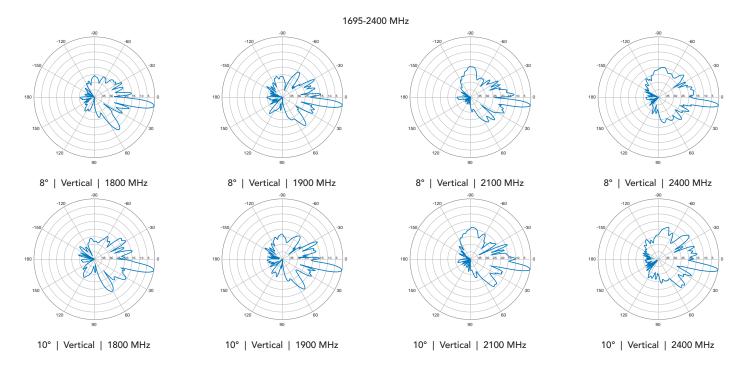



QUAD BAND | 8-PORT | WITH INTERNAL SMART BIAS-T | XXXX-POL | 68° / 63° / 65° / 65° | 13.8 / 14.7 / 17.5 / 17.5 DBI

Mounting Kit Ordering Options All mounting bracket kits are ordered separately unless otherwise indicated.

Mounting Options	Part Number	Image	Fits Pipe Diameter	Weight
3-Point Mounting and Downtilt Bracket Kit	36210008		40-115 mm 1.57-4.5 in	6.9 kg 15.2 lbs

Configuration Options

This antenna model **cannot** be used with Amphenol's UNICELL 3-sector antenna enclosures.