

# CUUT360X06Fxyz0

TRI BAND | OMNI | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)

## Features

- Omni configuration with 6 connectors
- Ideal for Small Cell / DAS applications
- Available with 4.3/10 or 7/16-DIN connectors
- Four unique mounting options
- Available in gray and brown



## Connector Description

The antenna has 6 connectors located at the bottom.

Low Band	<span style="color: red;">■</span> R1	696-960 MHz	(2x) 4.3/10 or 7/16-DIN Female
High Band #1	<span style="color: yellow;">■</span> Y1	1695-2700 MHz	(2x) 4.3/10 or 7/16-DIN Female
High Band #2	<span style="color: yellow;">■</span> Y2	1695-2700 MHz	(2x) 4.3/10 or 7/16-DIN Female

Electrical Characteristics	Low Band <span style="color: red;">■</span> R1		High Bands <span style="color: yellow;">■</span> Y1 and <span style="color: yellow;">■</span> Y2			
	696-960 MHz		(2x) 1695-2700 MHz			
Frequency Bands (MHz)	696-806	806-960	1695-1880	1850-1990	1920-2200	2300-2700
Polarization	±45°		(2x) ±45°			
Horizontal Beamwidth	360°	360°	360°	360°	360°	360°
Vertical Beamwidth	47.5° ±5.2°	35.4° ±7.8°	17.4° ±1.7°	16.0° ±1.1°	15.3° ±1.2°	12.6° ±1.4°
Gain (dBi)	6.3 ± 2.0	5.6 ± 1.4	9.2 ± 1.8	9.3 ± 2.8	9.5 ± 2.4	9.6 ± 3.0
Electrical Downtilt (°)	(x) 0, 5		(y) 0, 6			
Impedance	50Ω		50Ω			
VSWR	≤ 1.5:1		≤ 1.5:1			
Upper Sidelobe Suppression	N/A		> 11 dB			
Isolation Between Ports	20 dB		25 dB			
IM3 (2x20W carrier)	< -153 dBc		< -153 dBc			
Input Power	(2x) 500 W		(4x) 300 W			
Diplexed	No					
Number of Sectors, Sector Spacing and/or Pattern Shape	Omni					
Lightning Protection	Direct Ground					

## Mechanical Characteristics


Antenna Dimensions (Height x Diameter)	610 x 371 mm	24.0 x 14.6 in
Weight without Mounting Bracket Kit	10.0 kg	22.1 lbs
Antenna Volume	0.07 m <sup>3</sup>	2.3 ft <sup>3</sup>
Survival Wind Speed	200 km/hr	125 mph
Wind Area	0.22 m <sup>2</sup>	2.4 ft <sup>2</sup>
Wind Load (160 km/hr or 100 mph)	191 N	43 lbf

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

# CUUT360X06Fxyz0

TRI BAND | OMNI | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)

## Bottom View - Labeling

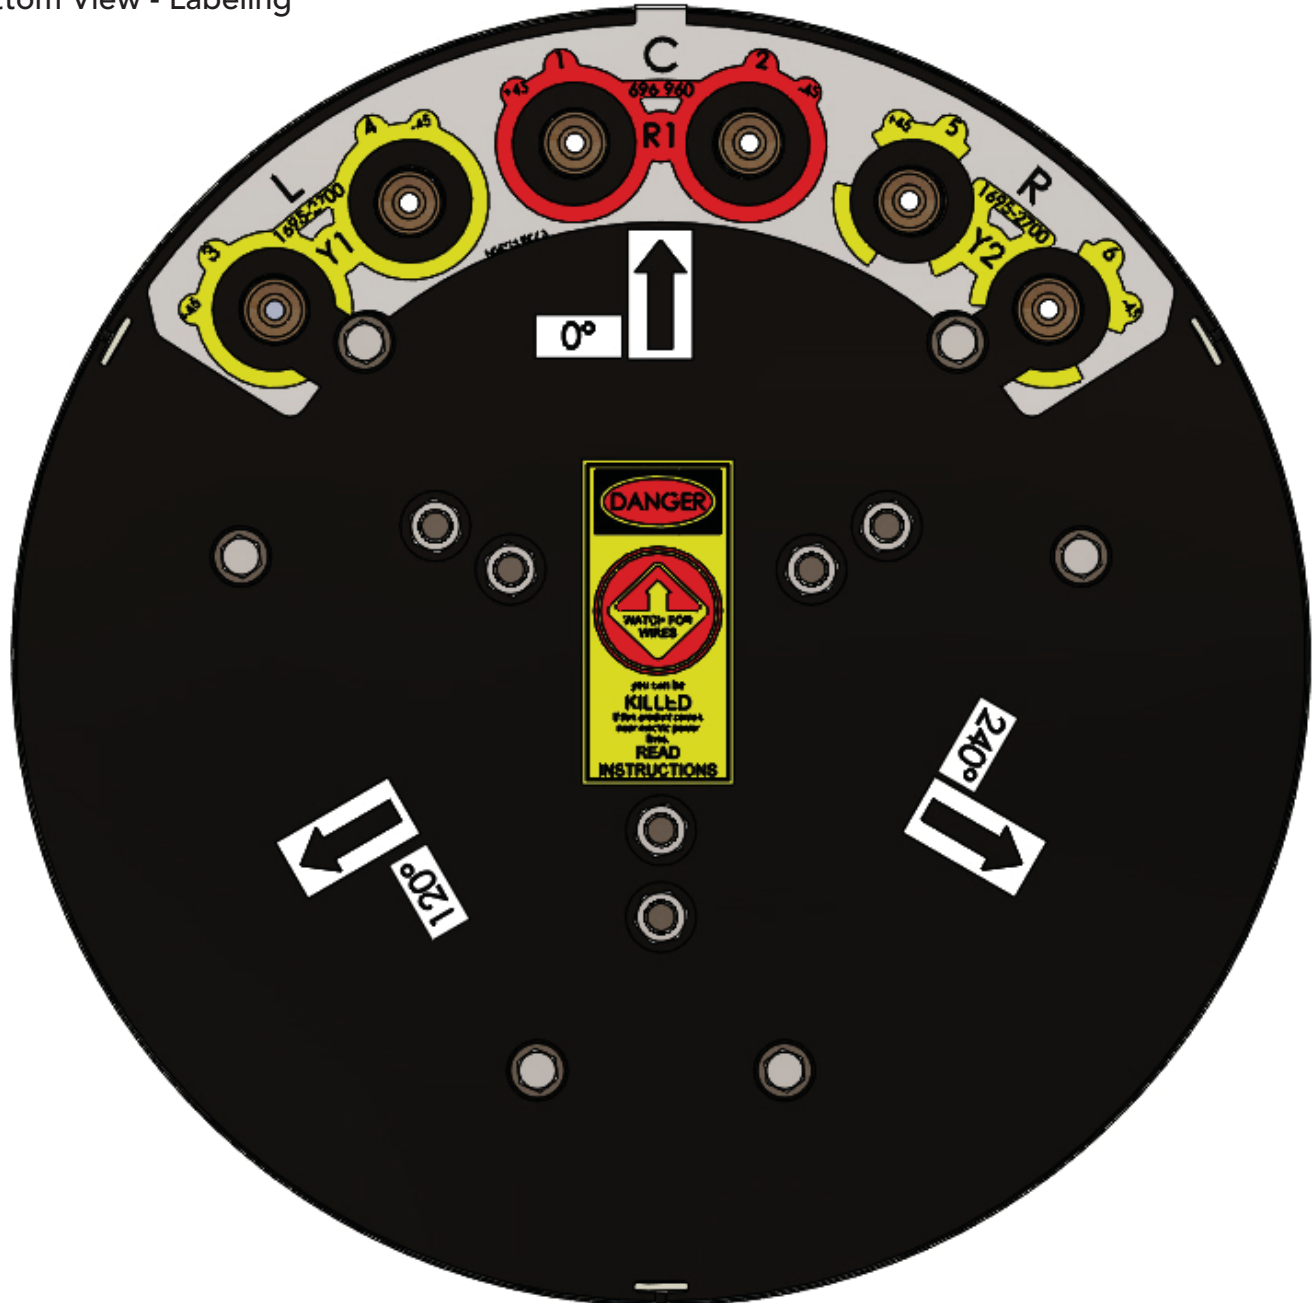


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

CUUT360X06Fxyz0

TRI BAND | OMNI | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)


Bottom View - Connector Diagram

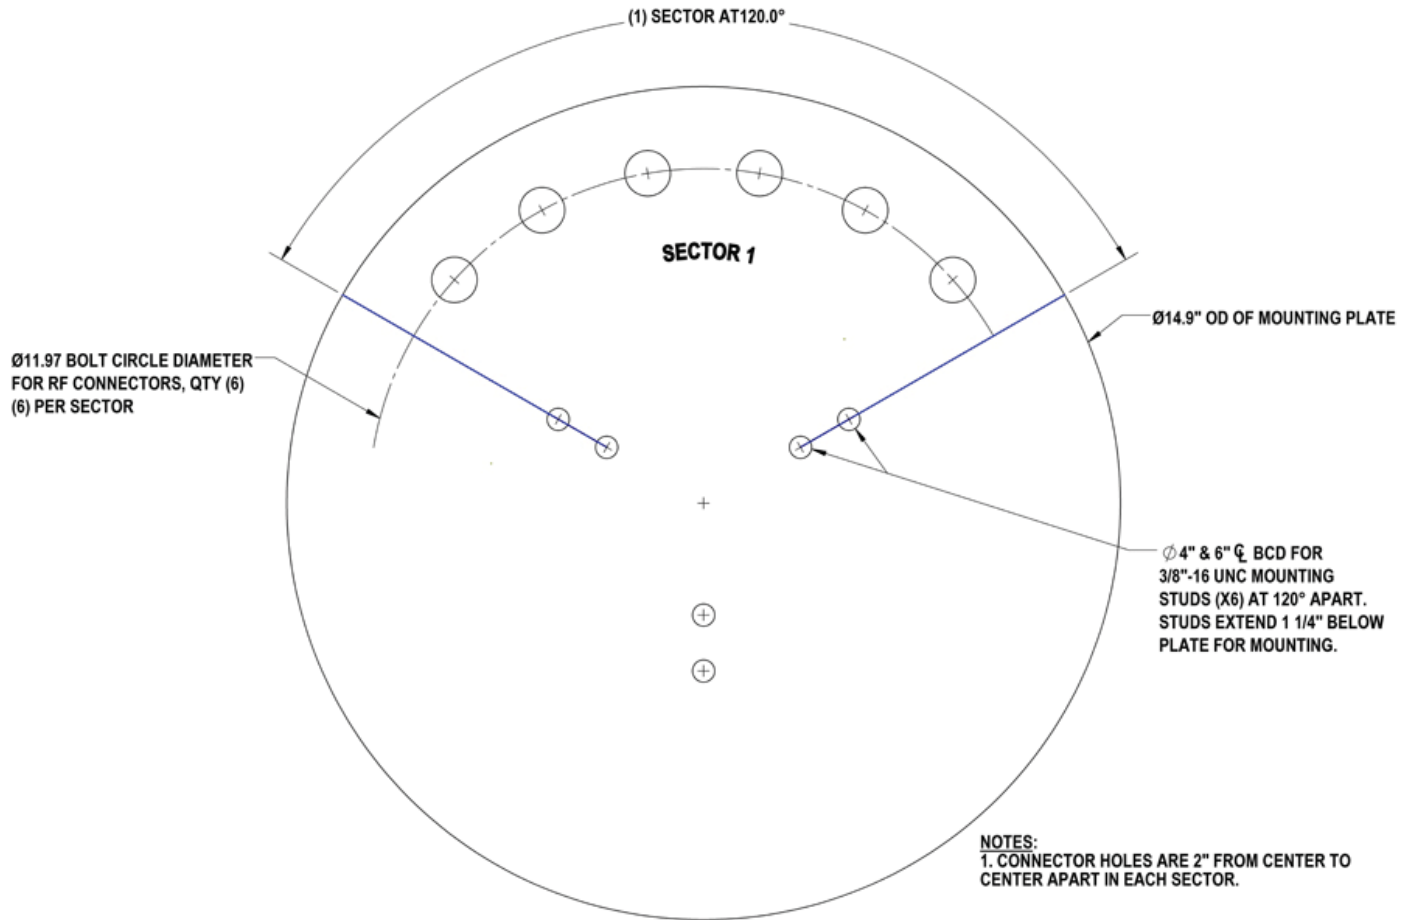


**CUUT360X06Fxyz0**

TRI BAND | OMNI | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)


**696-960 MHz**




Horizontal | 750 MHz




Horizontal | 850 MHz




0° | Vertical | 750 MHz



0° | Vertical | 850 MHz



5° | Vertical | 750 MHz




5° | Vertical | 850 MHz

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


**CUUT360X06Fxyz0**

TRI BAND | OMNI | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)


**1695-2700 MHz**




Horizontal | 1800 MHz




Horizontal | 1900 MHz




Horizontal | 2100 MHz




Horizontal | 2600 MHz




0° | Vertical | 1800 MHz




0° | Vertical | 1900 MHz




0° | Vertical | 2100 MHz




0° | Vertical | 2600 MHz




6° | Vertical | 1800 MHz



6° | Vertical | 1900 MHz



6° | Vertical | 2100 MHz



6° | Vertical | 2600 MHz

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

# CUUT360X06Fxyz0

TRI BAND | PSEUDO OMNI | CANISTER ANTENNA | X-POL | FIXED TILT





## Ordering Options

When ordering, select the Paint Color, Degree of Electrical Downtilt (**xy**) for the Low and High Bands and the Connector Type (**z**).

Paint Color	Electrical Downtilt Degree		Connector Type ( <b>z</b> )	
	Low Band ( <b>x</b> )	High Band ( <b>y</b> )	4.3/10 Female	7/16-DIN Female
Painted Gray	0°	0°	CUUT360X06F <b>00s</b> 0	CUUT360X06F <b>00D</b> 0
	0°	6°	CUUT360X06F <b>06s</b> 0	CUUT360X06F <b>06D</b> 0
	5°	0°	CUUT360X06F <b>50s</b> 0	CUUT360X06F <b>50D</b> 0
	5°	6°	CUUT360X06F <b>56s</b> 0	CUUT360X06F <b>56D</b> 0
Painted Brown	0°	0°	CUUT360X06F <b>00s</b> 0BR	CUUT360X06F <b>00D</b> 0BR
	0°	6°	CUUT360X06F <b>06s</b> 0BR	CUUT360X06F <b>06D</b> 0BR
	5°	0°	CUUT360X06F <b>50s</b> 0BR	CUUT360X06F <b>50D</b> 0BR
	5°	6°	CUUT360X06F <b>56s</b> 0BR	CUUT360X06F <b>56D</b> 0BR

## Mounting Kits

This antenna can be mounted using any of the following mounting kits. Mounting kits must be ordered separately.

Side Mounting Bracket Kit	Top Mounting Bracket Kit	Utility Pole Mounting Bracket Kit	Wide Diameter Pole Top Mounting Bracket Kit
CWT-MKS-SIDE	CWT-MKS-TOP	WB3X-MKS-01	CWT-MKS-BASE-xx
			

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.