


7691350

Tri Band | Microcell Panel | XXX-Pol | 80° / 60° / 60° | 7.0 / 8.0 / 8.0 dBi

- Indoor/outdoor microcell antenna, wall mounted design
- Two wide band crossed dipoles ±45° polarization



Electrical Characteristics			
Frequency Band	695-960 MHz	1710-1880 MHz	1900-2170 MHz
Polarisation	±45°	±45°	±45°
Horizontal Beamwidth (-3 dB)	80°	60°	60°
Gain	4.9 dBd (7.0 dBi)	5.9 dBd (8.0 dBi)	5.9 dBd (8.0 dBi)
Impedance	50Ω		
VSWR	< 2.1:1	< 1.5:1	< 1.5:1
Isolation Between Ports	> 23 dB		
Front-to-Back Ratio	> 20 dB		
Passive Intermodulation (2x20W)	-150 dBc (peak)		
Maximum Power	25 W per port		
Connector(s)	Two (2) N Female, 0.50 m Flylead of RG303		
Mechanical Characteristics			
Dimensions (Height x Width x Depth)	205 x 221 x 65 mm	8.07 x 8.7 x 2.6 in	
Weight	0.5 kg	1.1 lbs	
Mounting Options			
Mounting	Wall mounted standard - stainless steel plate 4 screw holes		

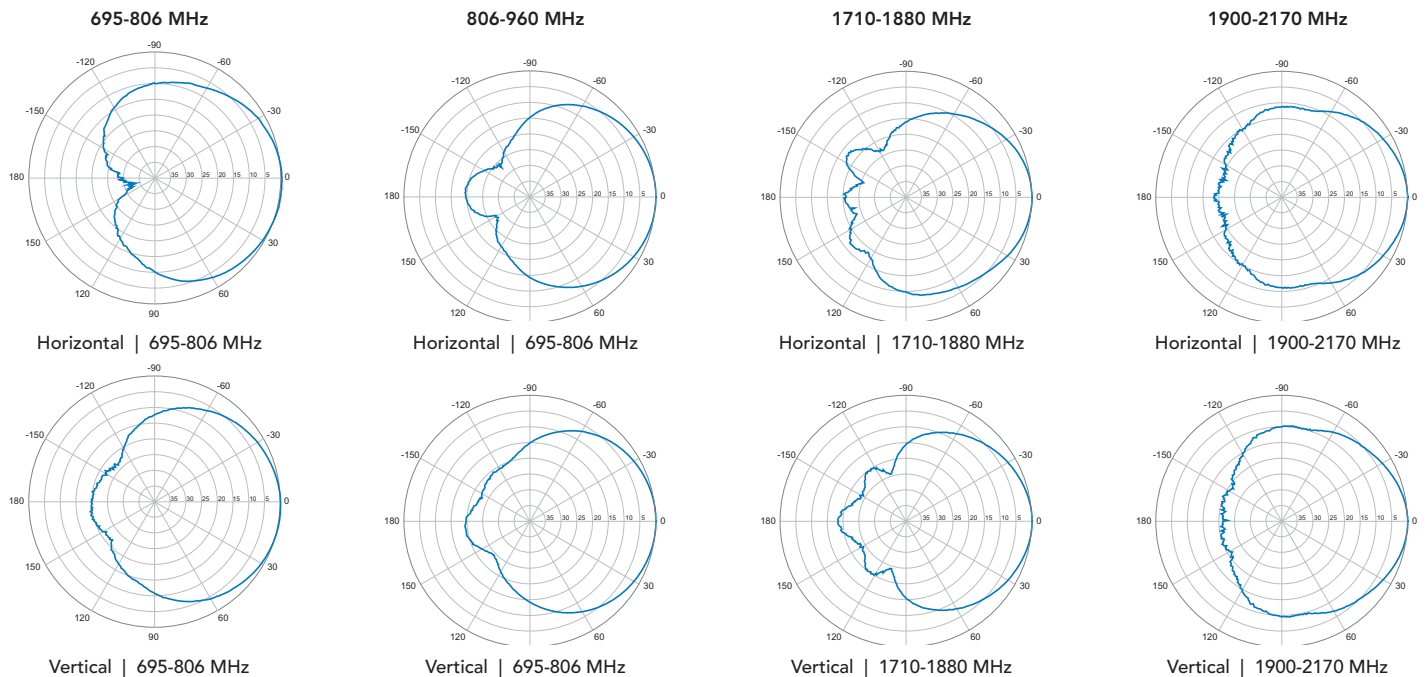

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.