

5056000

Ultra-Broad Multi Band | Ceiling Mount Omni | V-Pol | 360° | 2.1-5.0 dBi

- Indoor, Ceiling Mount Omni-Directional Antenna
- Ultra-Broad, Multi Band Performance


Ordering Options		Model Number
Antenna with N-Type Connector		5056000
Antenna with 4.1/9.5 Mini-DIN Connector		5056000-mDIN
Antenna with 7/16-DIN Connector		5056000-DIN
Electrical Characteristics		
Frequency Band		330-960 MHz 1710-6000 MHz
Polarization		Vertical
Horizontal Beamwidth		360° 360°
Vertical Beamwidth		60° 60°
Gain		2.1 dBi 5.0 dBi at 1710-2170 MHz 5.0 dBi at 2400-6000 MHz
Impedance		50Ω
VSWR	330-350 MHz	< 2.8:1
	350-6000 MHz	< 2:1
Passive Intermodulation (2x20W)		-150 dBc* <i>*PIM Value for N-Type only applicable at date of manufacture</i>
Input Power		50W
Connector(s)		1 Connector / N-Type, 7/16 DIN, or 4.1/9.5 Mini-DIN / Female on Base of Antenna
Mechanical Characteristics		
Radome Color		White
Dimensions (Diameter x Height)		334 x 232 mm 13.1 x 9.1 in
Weight without Mounting Brackets		0.5 kg 1.1 lbs
Mounting Options		
Mounting		Ceiling mount kit included




Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

5056000

Ultra-Broad Multi Band | Ceiling Mount Omni | V-Pol | 360° | 2.1-5.0 dBi

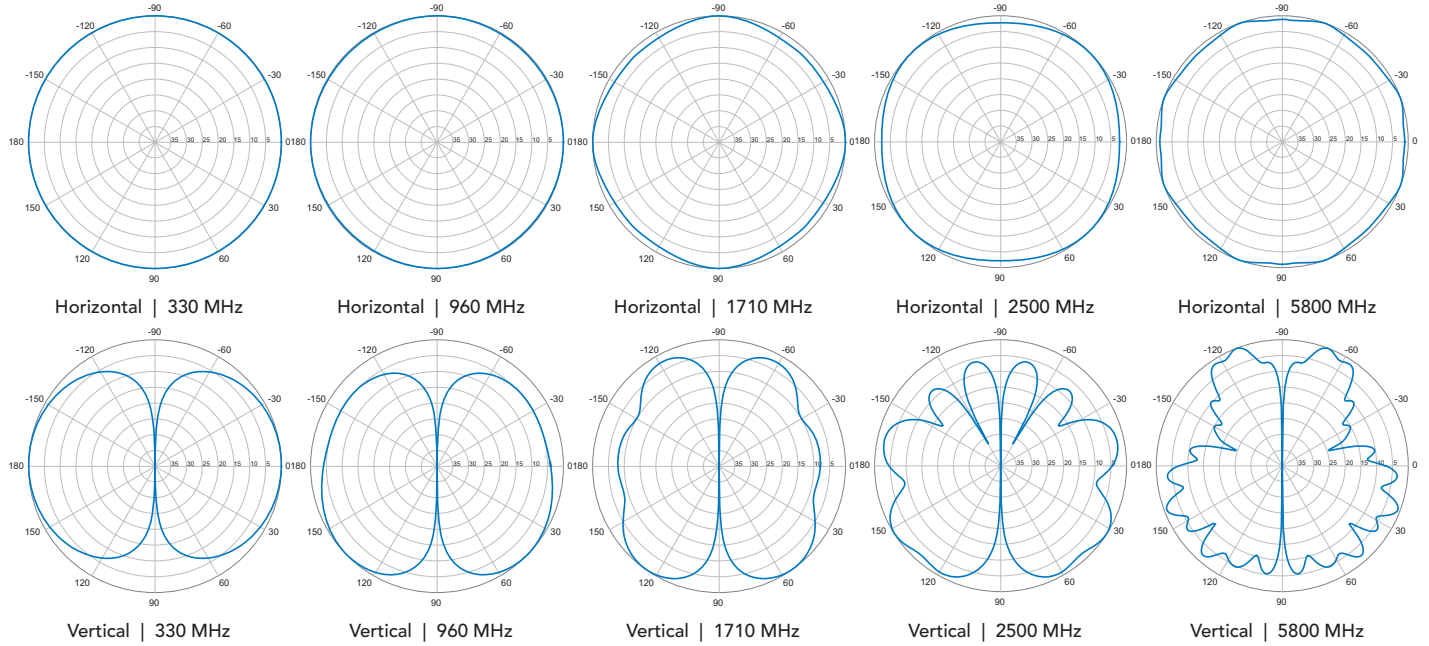

Dimensions

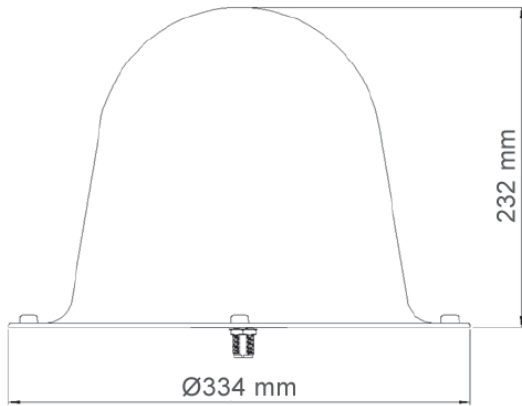

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.