

## 2C4U6VT360X06Fwxys5



### Features

- Pseudo omni configuration with 24 connectors
- Ideal for multi-carrier or MIMO deployments
- Broadband networks 696-960, 1695-2700 and 3300-4200 MHz
- Easily removable lifting ring
- Improvements in gain, port isolation and VSWR
- Available for order with a grey, brown or black radome

PRODUCT OVERVIEW	Frequency Range (MHz)	(2x) 696-960	(4x) 1695-2700	(6x) 3300-4200
	Array	■ R1 ■ R2	■ Y1 ■ Y2 ■ Y3 ■ Y4	■ P1 ■ P2 ■ P3 ■ P4 ■ P5 ■ P6
	Connector	4 PORTS	8 PORTS	12 PORTS
	Polarization	XPOL	XPOL	XPOL
	Azimuth Beamwidth (avg)	360°	360°	360°
	Electrical Downtilt	0°	2°, 4°, 6°	2°, 4°, 6°
	Configuration	OMNI CONFIGURATION		
	Maximum Continuous Power Per Port @ 50° C (122° F)	500 W	300 W	100 W
	Maximum Total Continuous Power at 50° C (122° F)	5600 W		
	Connector Type	(24x) 4.3-10 FEMALE		
	Dimensions	608 x Ø371 mm (24.0 x Ø14.6 in)		
	Radome Color Options	GREY, BROWN or BLACK		

### ELECTRICAL SPECIFICATIONS

■ R1 ■ R2

Frequency Range		MHz	(2x) 696-960	
Frequency Sub-Range		MHz	696-806	806-960
Polarization		---	(2x) ±45°	
Gain	BASTA	dBi	4.2 ± 1.0	4.4 ± 1.0
	MAX	dBi	5.2	5.4
Azimuth Beamwidth (3 dB)		degrees	360°	360°
Elevation Beamwidth (3 dB)		degrees	55.1° ± 12.0°	59.6° ± 8.8°
Electrical Downtilt		degrees	(w) 0°	
Impedance		Ohms	50Ω	
VSWR		---	≤ 1.5:1	
Passive Intermodulation 3rd Order for 2x20 W Carriers		dBc	< -153	
Upper Sidelobe Suppression		dB	N/A	
Isolation	Intraband	dB	> 25	
	Interband	dB	> 28	

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 2C4U6VT360X06Fwxys5

### ELECTRICAL SPECIFICATIONS

■ Y1 ■ Y2 ■ Y3 ■ Y4

Frequency Range		MHz	(4x) 1695-2700			
Frequency Sub-Range		MHz	1695-1880	1850-1990	1920-2200	2300-2700
Polarization		---	(4x) $\pm 45^\circ$			
Gain	BASTA	dBi	$7.5 \pm 1.3$	$8.0 \pm 1.2$	$7.9 \pm 1.3$	$8.3 \pm 1.2$
	MAX	dBi	8.8	9.2	9.2	9.5
Azimuth Beamwidth (3 dB)		degrees	360°	360°	360°	360°
Elevation Beamwidth (3 dB)		degrees	$30.5^\circ \pm 5.8^\circ$	$26.3^\circ \pm 4.7^\circ$	$23.9^\circ \pm 5.2^\circ$	$21.2^\circ \pm 3.6^\circ$
Electrical Downtilt		degrees	(x) $2^\circ, 4^\circ, 6^\circ$			
Impedance		Ohms	50Ω			
VSWR		---	$\leq 1.5:1$			
Passive Intermodulation 3rd Order for 2x20 W Carriers		dBc	< -153			
Upper Sidelobe Suppression		dB	N/A			
Isolation	Intraband	dB	> 25			
	Interband	dB	> 28			

### ELECTRICAL SPECIFICATIONS

■ P1 ■ P2 ■ P3 ■ P4 ■ P5 ■ P6


Frequency Range		MHz	(6x) 3300-4200		
Frequency Sub-Range		MHz	3300-3550	3550-3700	3700-4200
Polarization		---	(6x) $\pm 45^\circ$		
Gain	BASTA	dBi	$8.8 \pm 1.1$	$9.1 \pm 0.8$	$10.3 \pm 1.5$
	MAX	dBi	9.9	9.9	11.8
Azimuth Beamwidth (3 dB)		degrees	360°	360°	360°
Elevation Beamwidth (3 dB)		degrees	$14.9^\circ \pm 2.8^\circ$	$14.4^\circ \pm 3.9^\circ$	$13.5^\circ \pm 3.9^\circ$
Electrical Downtilt		degrees	(y) $2^\circ, 4^\circ, 6^\circ$		
Impedance		Ohms	50Ω		
VSWR		---	1.5:1		
Passive Intermodulation 3rd Order for 2x20 W Carriers		dBc	< -153		
Upper Sidelobe Suppression		dB	> 15		
Isolation	Intraband	dB	> 25		
	Interband	dB	> 28		

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 2C4U6VT360X06Fwxys5

### MECHANICAL SPECIFICATIONS

Antenna	Height	mm (in)	608 (24.0)
	Diameter	mm (in)	371 (14.6)
Net Weight - Antenna Only		kg (lbs)	13 (29.0)
Windload	Calculation	km/h (mph)	160 (100)
	Frontal	N (lbf)	191 (43)
Survival Wind Speed		km/h (mph)	241 (150)
Wind Area		m <sup>2</sup> (ft <sup>2</sup> )	0.22 (2.4)
Volume		m <sup>3</sup> (ft <sup>3</sup> )	0.07 (2.3)
Connector	Type	---	(24x) 4.3-10 Female
	Position	---	Bottom
Radome Color		---	Grey (RAL 7035) Brown (RAL 8022) Black (RAL 9011)
Lightning Protection (Grounding Type)		---	Direct Ground

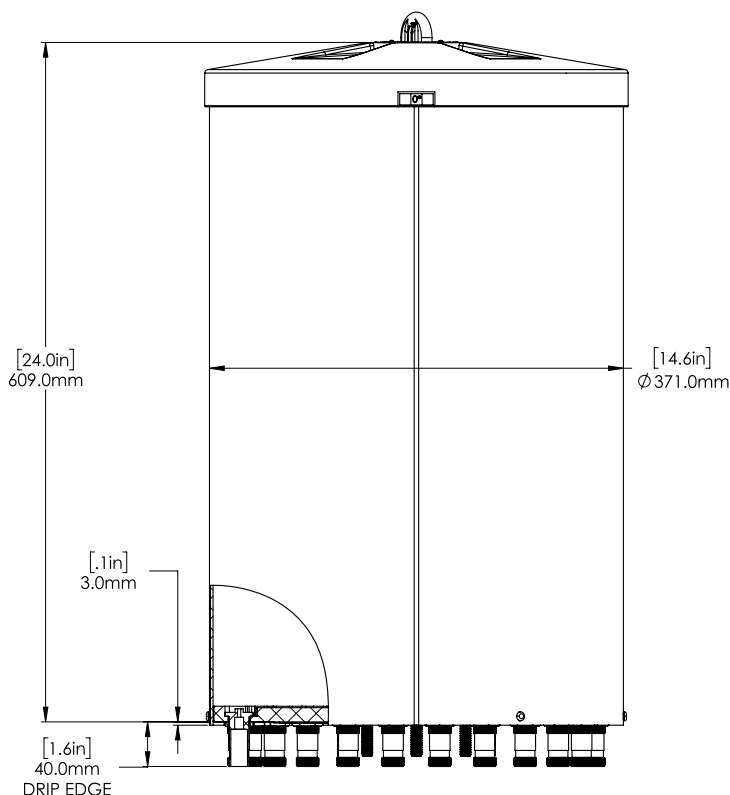


FRONT VIEW  
NOTE: SEAM OF RADOME  
IS ORIENTED TO 0 Deg

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 2C4U6VT360X06Fwxys5

### ARRAY LAYOUT Topology

FREQUENCY	ARRAY	CONNECTOR	CONNECTOR TYPE
696-960 MHz	<span style="color: red;">■</span> R1	1-2	(2x) 4.3-10 Female
696-960 MHz	<span style="color: red;">■</span> R2	3-4	(2x) 4.3-10 Female
1695-2700 MHz	<span style="color: yellow;">■</span> Y1	5-6	(2x) 4.3-10 Female
1695-2700 MHz	<span style="color: yellow;">■</span> Y2	7-8	(2x) 4.3-10 Female
1695-2700 MHz	<span style="color: yellow;">■</span> Y3	9-10	(2x) 4.3-10 Female
1695-2700 MHz	<span style="color: yellow;">■</span> Y4	11-12	(2x) 4.3-10 Female
3300-4200 MHz	<span style="color: purple;">■</span> P1	13-14	(2x) 4.3-10 Female
3300-4200 MHz	<span style="color: purple;">■</span> P2	15-16	(2x) 4.3-10 Female
3300-4200 MHz	<span style="color: purple;">■</span> P3	17-18	(2x) 4.3-10 Female
3300-4200 MHz	<span style="color: purple;">■</span> P4	19-20	(2x) 4.3-10 Female
3300-4200 MHz	<span style="color: purple;">■</span> P5	21-22	(2x) 4.3-10 Female
3300-4200 MHz	<span style="color: purple;">■</span> P6	23-24	(2x) 4.3-10 Female

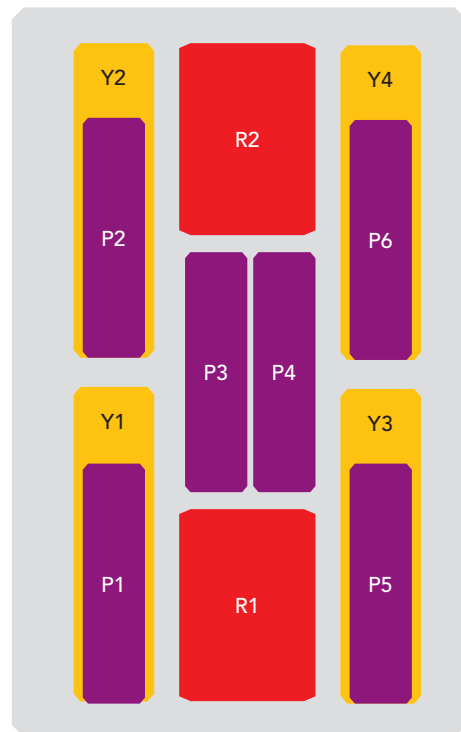

*The illustration is not shown to scale.*


## 2C4U6VT360X06Fwxys5

**BOTTOM VIEW - LABELING**



## 2C4U6VT360X06Fwxys5

### BOTTOM VIEW - CONNECTOR DIAGRAM

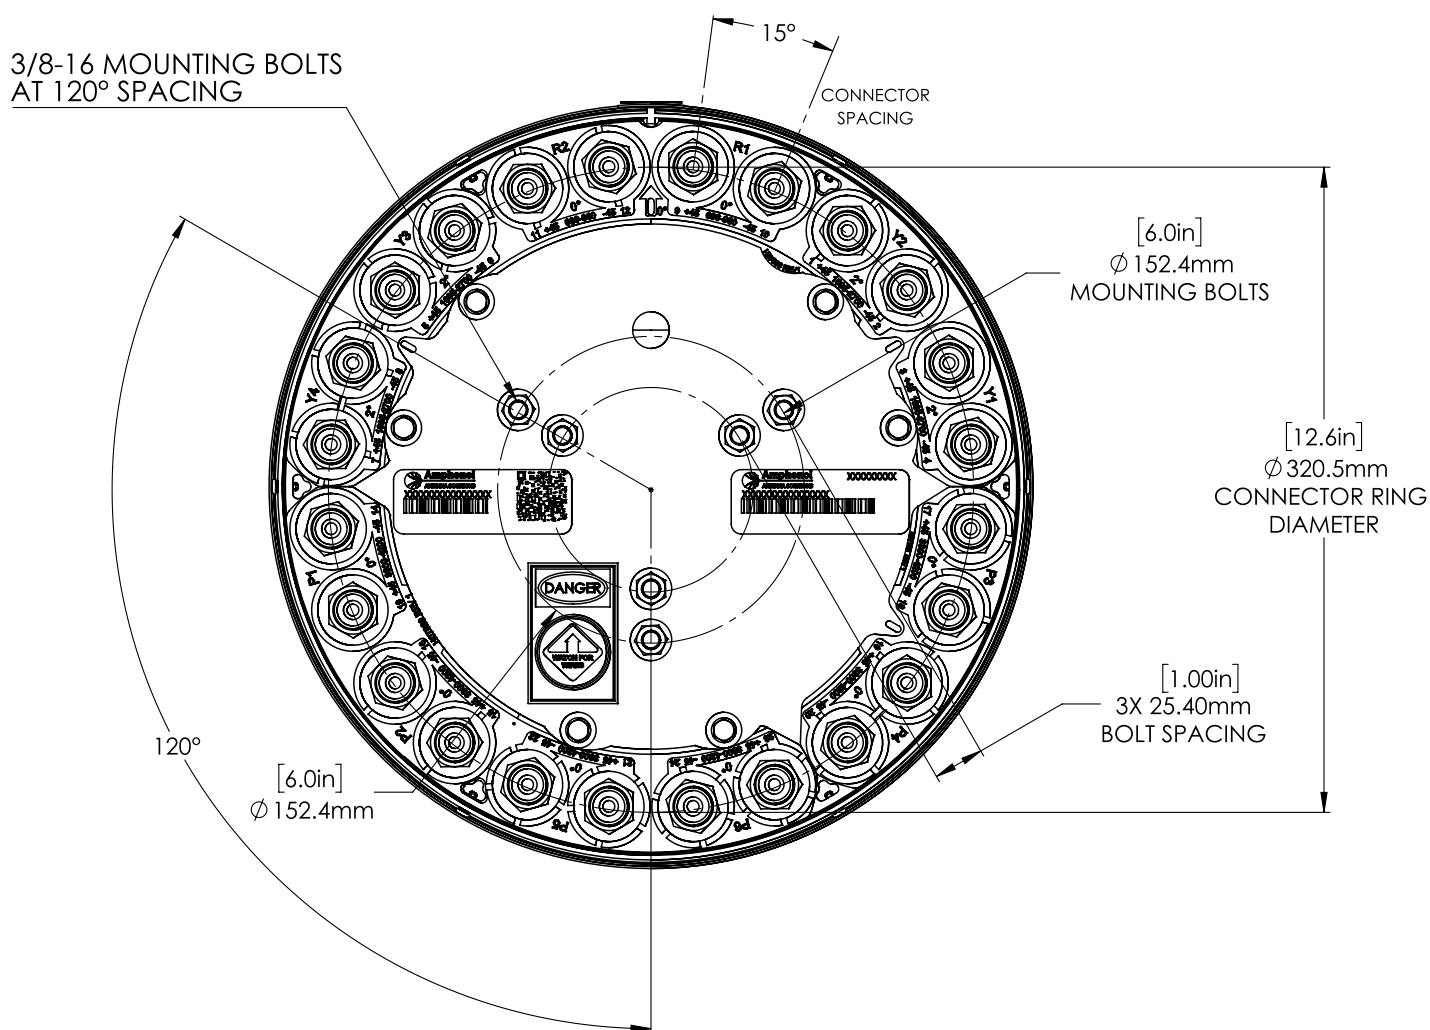

### INSTALLATION Please read all installation notes before installing this product.



Always attach the antenna using all mounting points.

Do not install the antenna with the connectors facing upwards.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 2C4U6VT360X06Fwxys5

**MOUNTING KITS** Select from the following mounting options when ordering. Mounting kits for canister antennas are ordered as a separate line item.

MODEL NUMBER		DESCRIPTION
CWT-MKS-SIDE		SIDE MOUNTING BRACKET KIT FOR CANISTER ANTENNA
CWT-MKS-TOP		TOP MOUNTING BRACKET KIT FOR CANISTER ANTENNA
WB3X-MKS-01		UTILITY POLE MOUNTING BRACKET KIT FOR CANISTER ANTENNA
CWT-MKS-BASE-xx		WIDE DIAMETER POLE TOP MOUNTING BRACKET KIT FOR CANISTER ANTENNA. AVAILABLE IN BROWN, BLACK AND GREY TO MATCH ANTENNA RADOME AND/OR MOUNTING STRUCTURE.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.



## 2C4U6VT360X06Fwxy<sup>s</sup>5

**HOW TO READ THE MODEL NUMBER** Each letter and number has meaning.

NUMBER OF BANDS and OPERATING FREQUENCY			PATTERN TYPE	AZIMUTH BEAMWIDTH	POLARIZATION	LENGTH	TILT TYPE	TILT OPTIONS	CONNECTOR TYPE	VARIATION	RADOME COLOR OPTIONS
2C	4U	6V	T	360	X	06	F	wxy	s	5	BK BR
(2x) 696-960	(4x) 1695-2700	(2x) 3300-4200	Tri-Sector	360°	XPOL	0.6 meters	Fixed Tilt	These letters are placeholders for fixed tilt options.  Refer to Electrical Specifications for available tilt options.	4.3-10 Connector	5th generation enhanced mechanical package	BK indicates a Black radome.  BR indicates a Brown radome.  The default radome color is Grey. No letters are required for a Grey radome.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.



## 2C4U6VT360X06Fwxys5

### ORDERING OPTIONS Select from the following ordering options

SELECT RADOME COLOR	SELECT DEGREE OF ELECTRICAL DOWNTILT FOR EACH BAND			MODEL NUMBER
	696-960 MHz	1695-2700 MHz	3300-4200 MHz	
Grey RAL 7035	0°	2°	2°	2C4U6VT360X06F022s5
	0°	2°	4°	2C4U6VT360X06F024s5
	0°	2°	6°	2C4U6VT360X06F026s5
	0°	4°	2°	2C4U6VT360X06F042s5
	0°	4°	4°	2C4U6VT360X06F044s5
	0°	4°	6°	2C4U6VT360X06F046s5
	0°	6°	2°	2C4U6VT360X06F062s5
	0°	6°	4°	2C4U6VT360X06F064s5
	0°	6°	6°	2C4U6VT360X06F066s5
Brown RAL 8022	0°	2°	2°	2C4U6VT360X06F022s5BR
	0°	2°	4°	2C4U6VT360X06F024s5BR
	0°	2°	6°	2C4U6VT360X06F026s5BR
	0°	4°	2°	2C4U6VT360X06F042s5BR
	0°	4°	4°	2C4U6VT360X06F044s5BR
	0°	4°	6°	2C4U6VT360X06F046s5BR
	0°	6°	2°	2C4U6VT360X06F062s5BR
	0°	6°	4°	2C4U6VT360X06F064s5BR
	0°	6°	6°	2C4U6VT360X06F066s5BR
Black RAL 9011	0°	2°	2°	2C4U6VT360X06F022s5BK
	0°	2°	4°	2C4U6VT360X06F024s5BK
	0°	2°	6°	2C4U6VT360X06F026s5BK
	0°	4°	2°	2C4U6VT360X06F042s5BK
	0°	4°	4°	2C4U6VT360X06F044s5BK
	0°	4°	6°	2C4U6VT360X06F046s5BK
	0°	6°	2°	2C4U6VT360X06F062s5BK
	0°	6°	4°	2C4U6VT360X06F064s5BK
	0°	6°	6°	2C4U6VT360X06F066s5BK

OMNI



24.0 IN

FIXED TILT



2C4U6VT360X06Fwxys5

750 MHz ————  
850 MHz ————

■ R1, 0° TILT

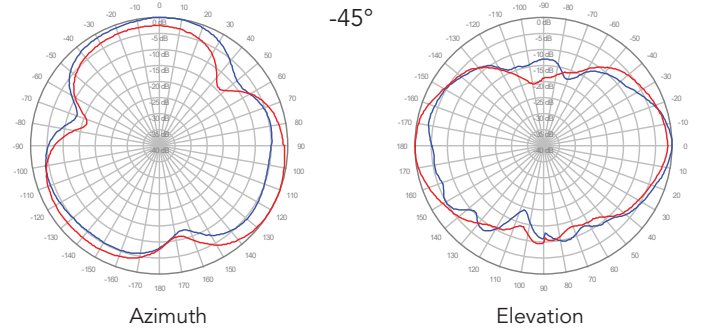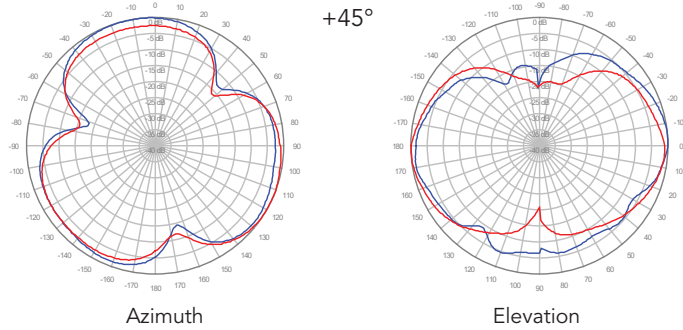


■ R2, 0° TILT

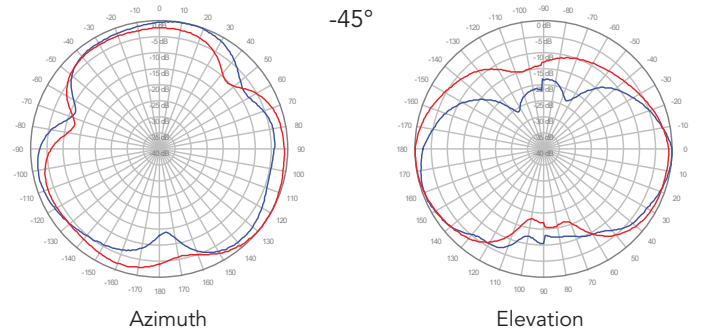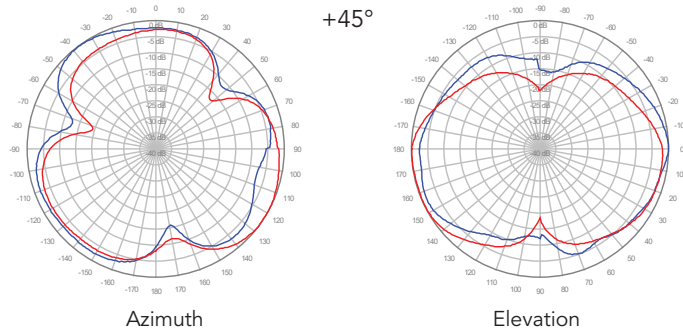


## 2C4U6VT360X06Fwxys5

1800 MHz —  
1900 MHz —  
2100 MHz —  
2300 MHz —  
2600 MHz —


### Y1, 2° TILT

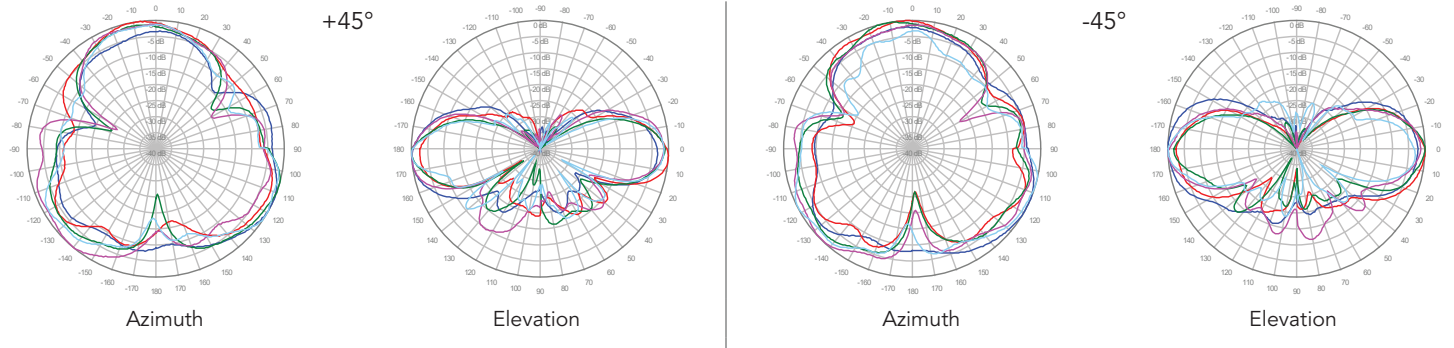


### Y2, 2° TILT

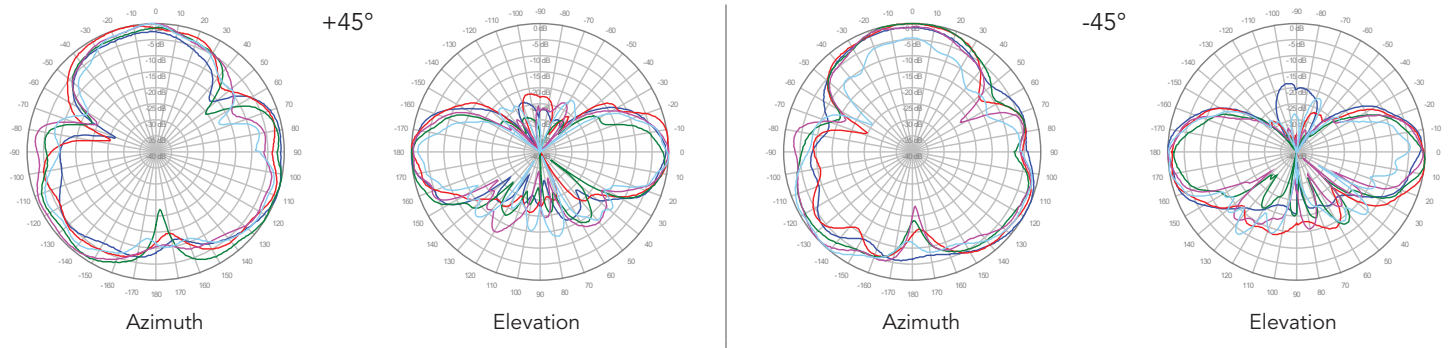

### Y3, 2° TILT

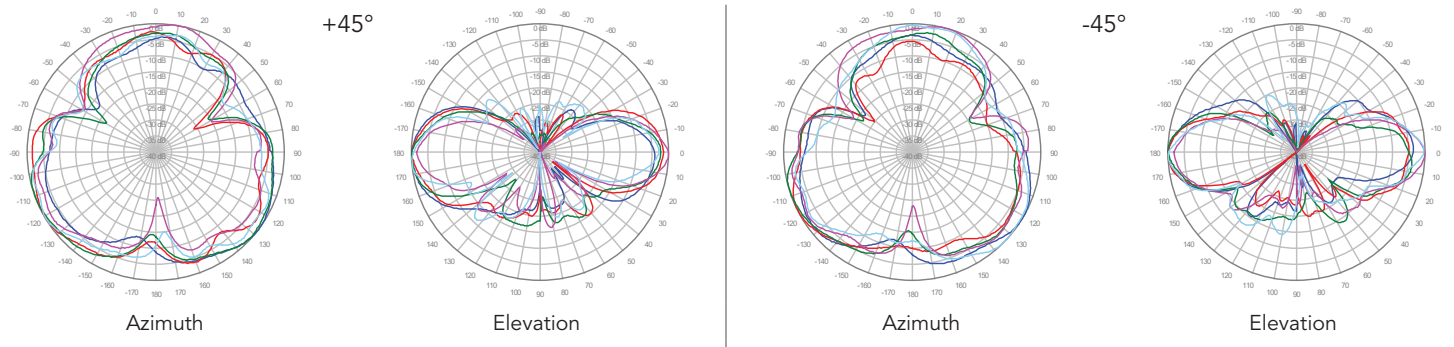

### Y4, 2° TILT


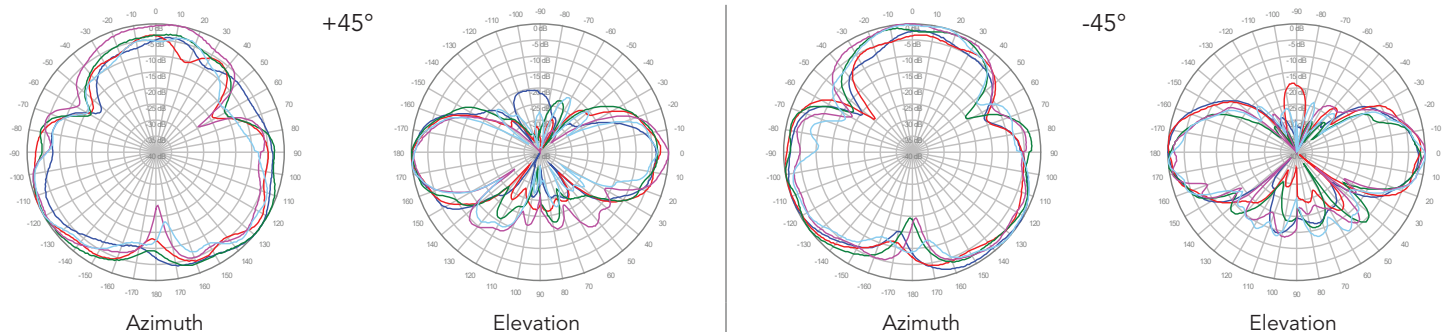


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.



## 2C4U6VT360X06Fwxys5

1800 MHz —  
1900 MHz —  
2100 MHz —  
2300 MHz —  
2600 MHz —



### Y1, 4° TILT

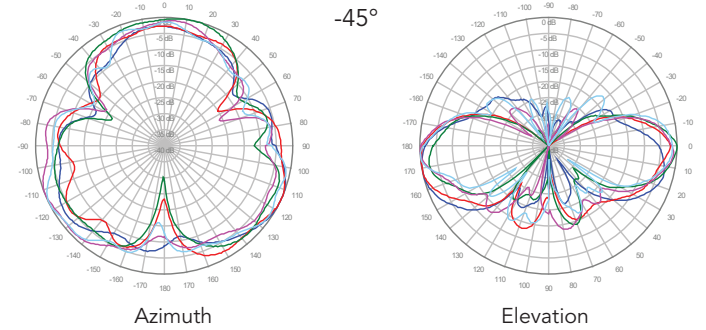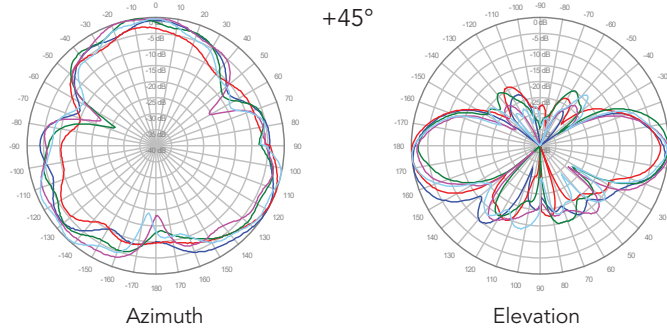



### Y2, 4° TILT

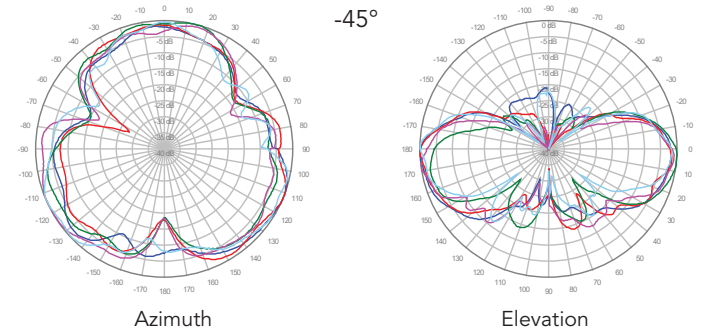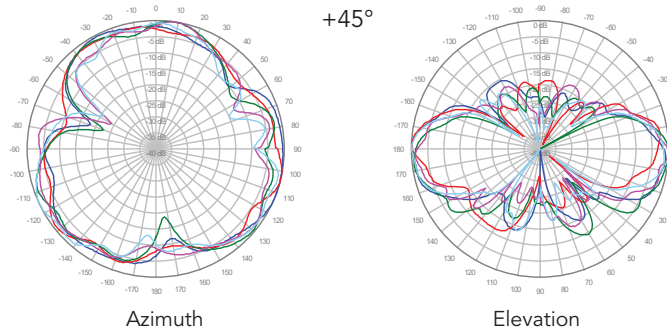

### Y3, 4° TILT

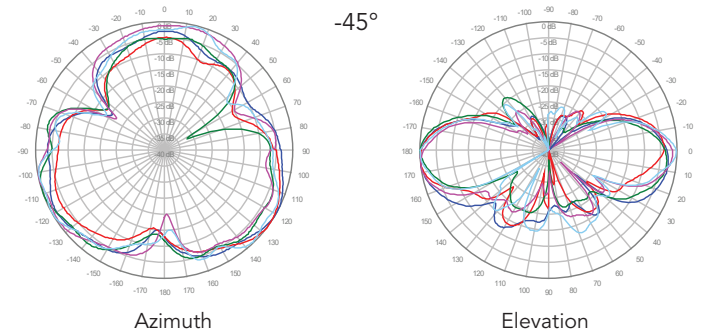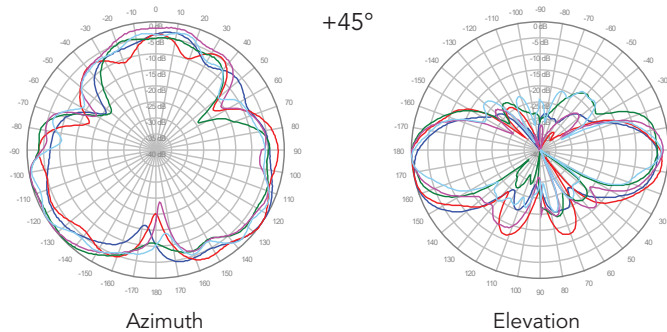

### Y4, 4° TILT

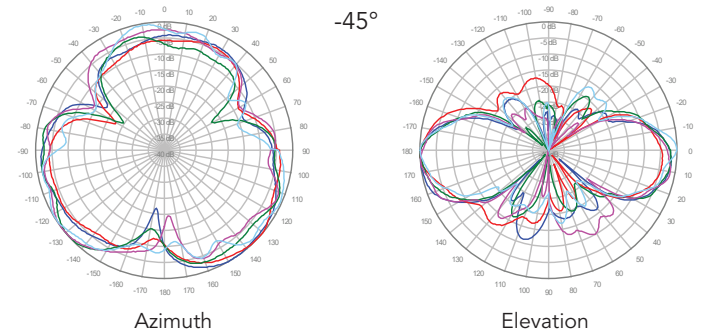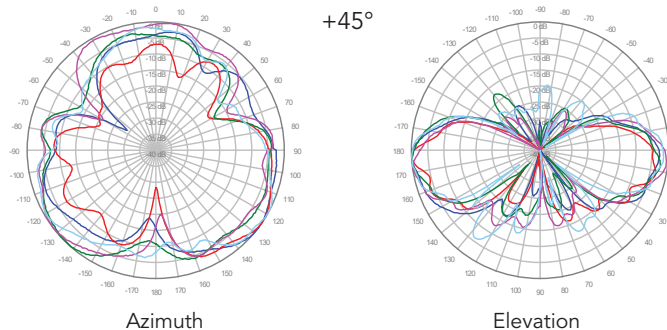



Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.





## 2C4U6VT360X06Fwxys5

1800 MHz —  
1900 MHz —  
2100 MHz —  
2300 MHz —  
2600 MHz —



### Y1, 6° TILT

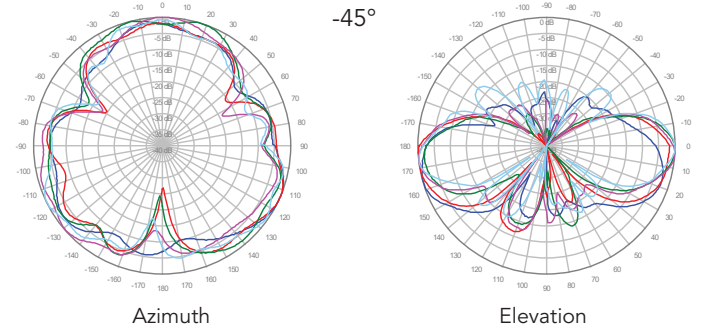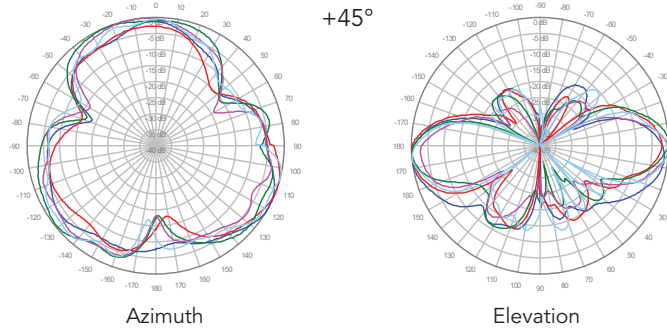



### Y2, 6° TILT

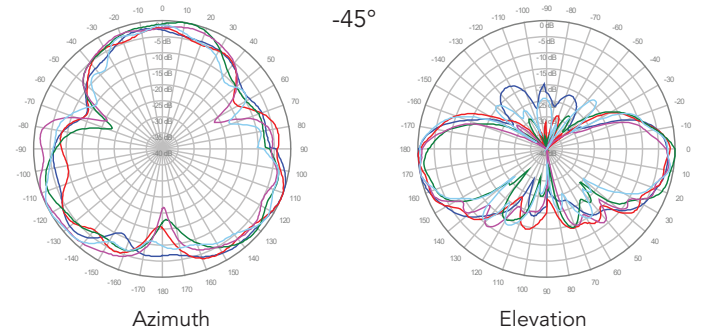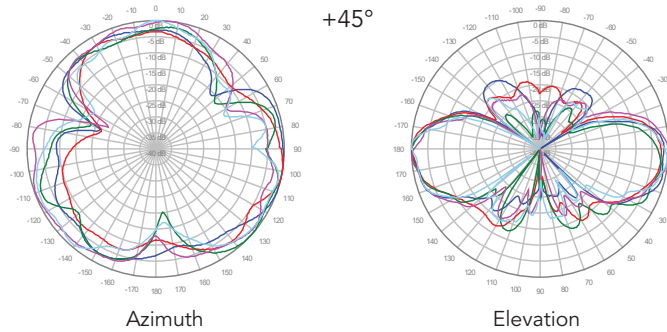

### Y3, 6° TILT

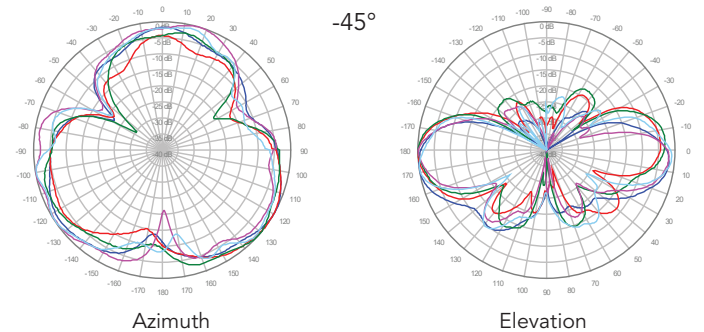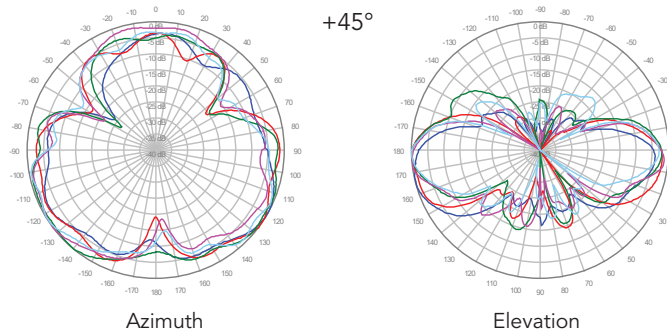


### Y4, 6° TILT

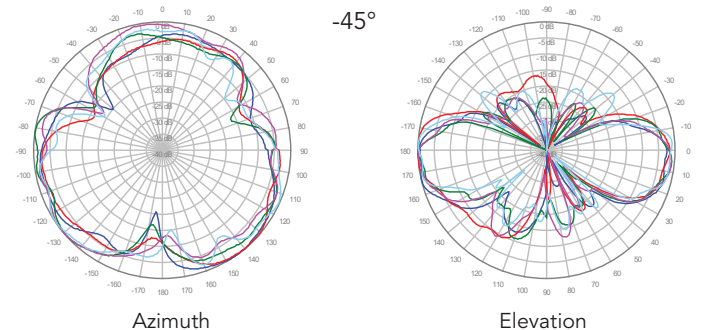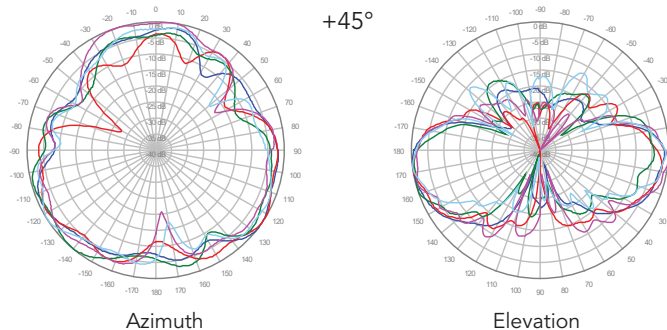


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 2C4U6VT360X06Fwxys5


### P1, 2° TILT

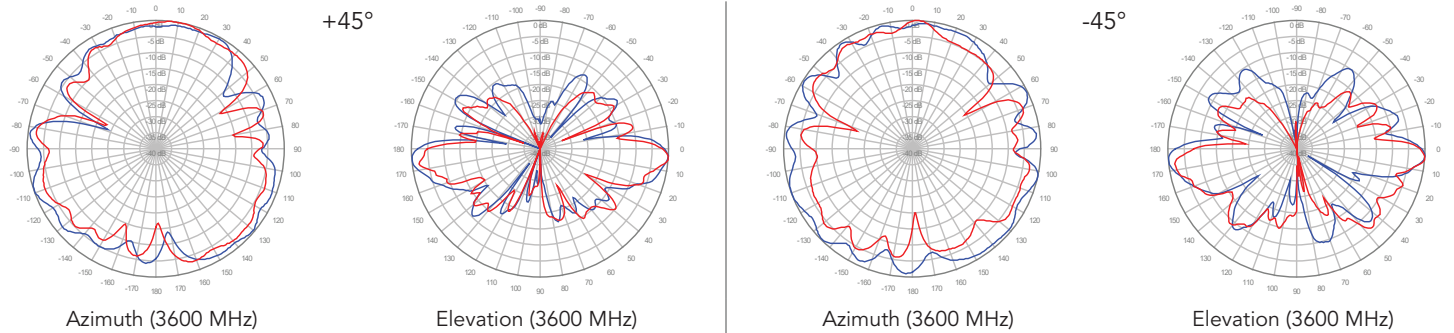


### P2, 2° TILT

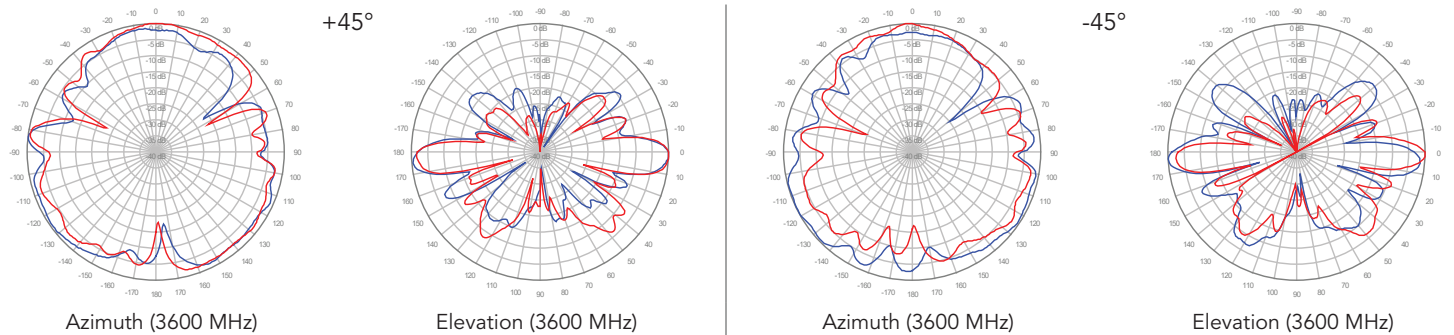

### P3, 2° TILT

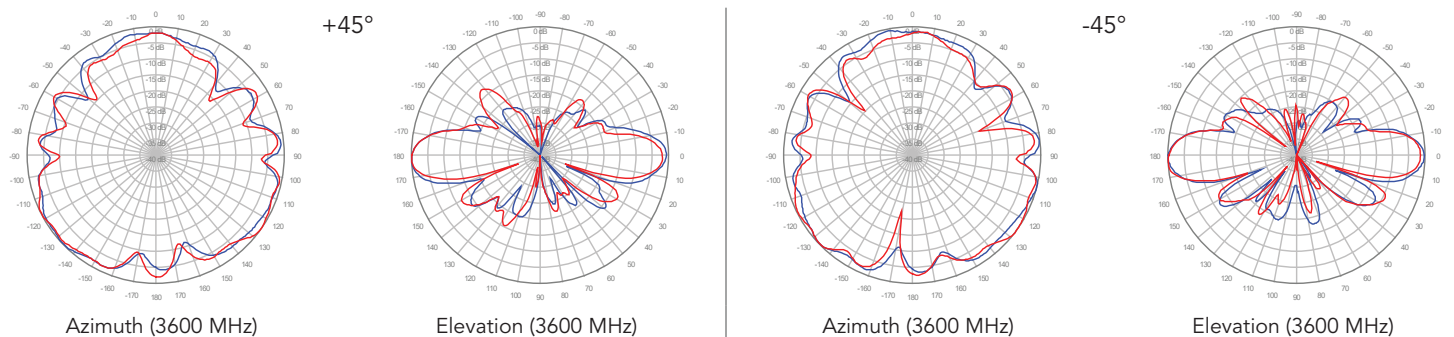

### P4, 2° TILT

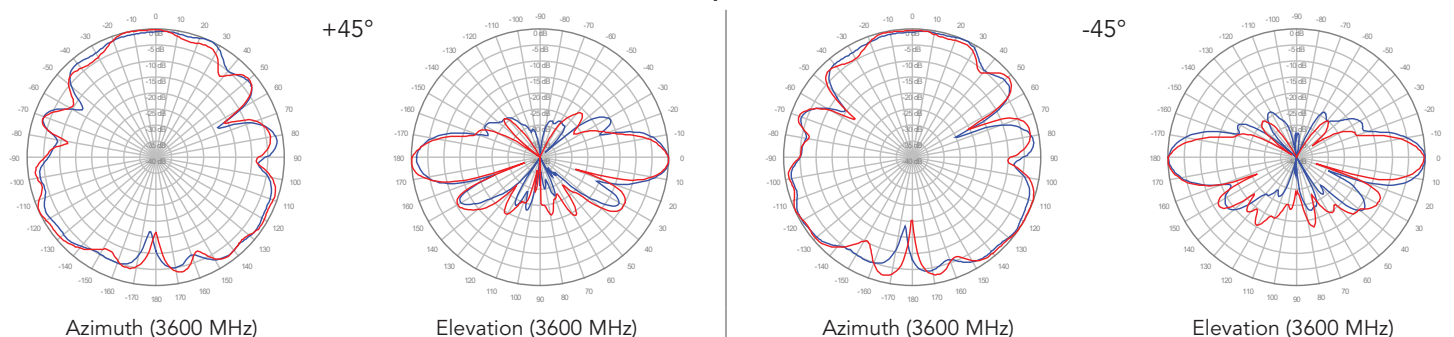


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


2C4U6VT360X06Fwxys5

3600 MHz ————  
4000 MHz ————

**P5, 2° TILT**

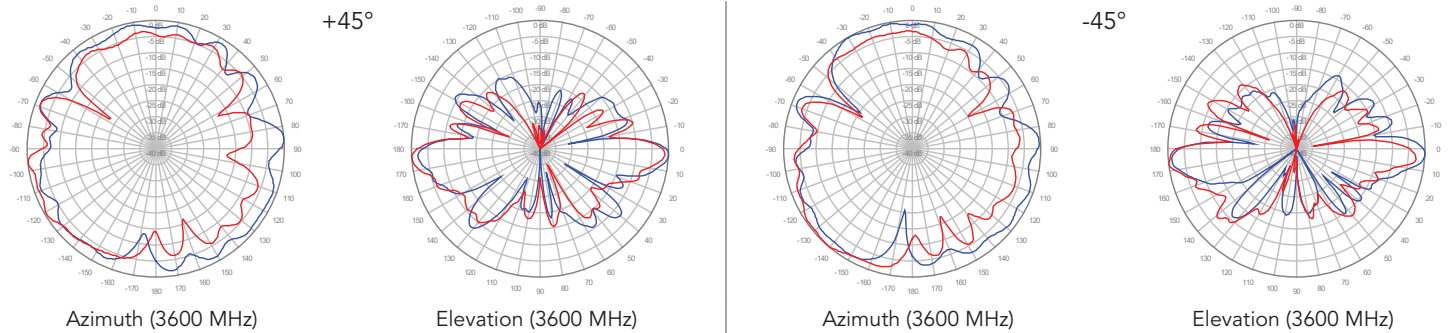

**P6, 2° TILT**

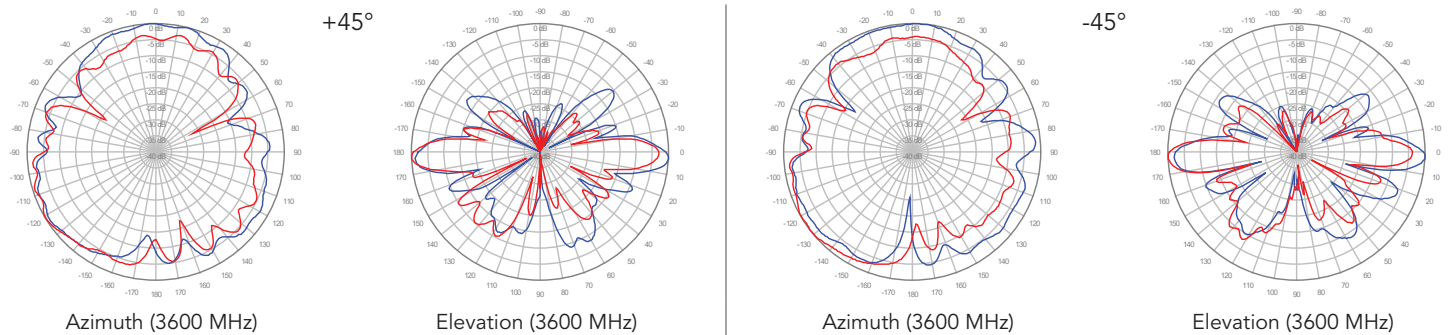





## 2C4U6VT360X06Fwxys5

3600 MHz ————  
4000 MHz ————


### P1, 4° TILT

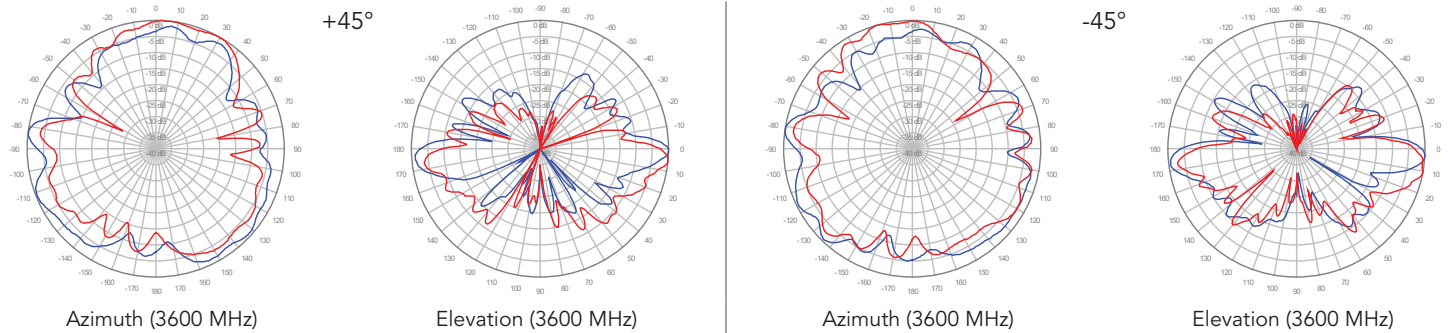


### P2, 4° TILT

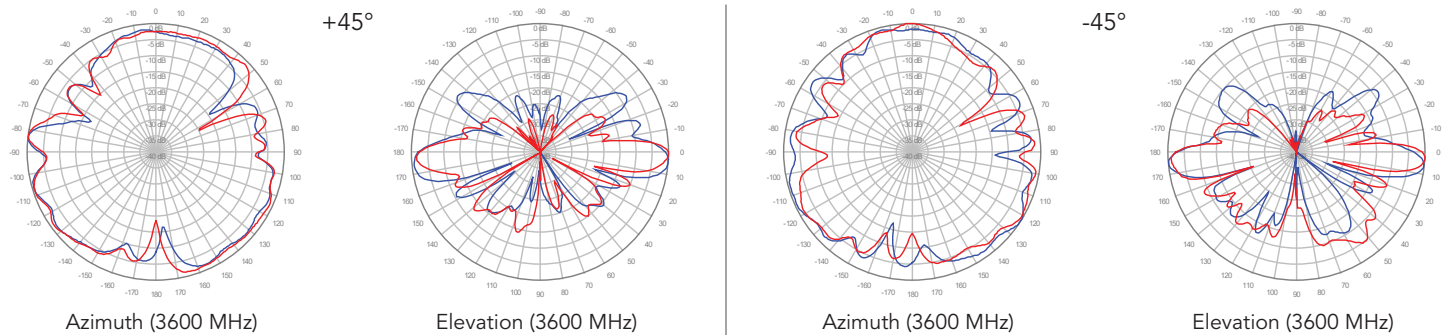

### P3, 4° TILT

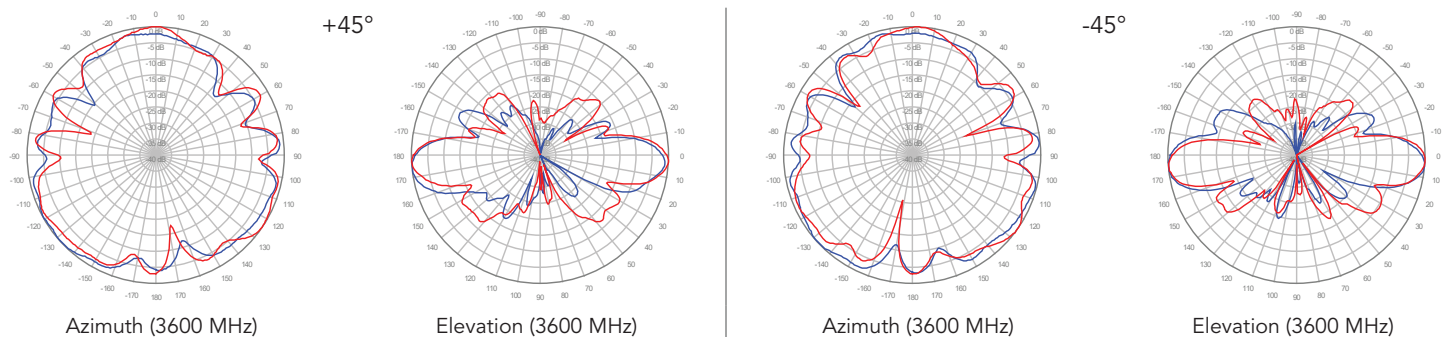

### P4, 4° TILT




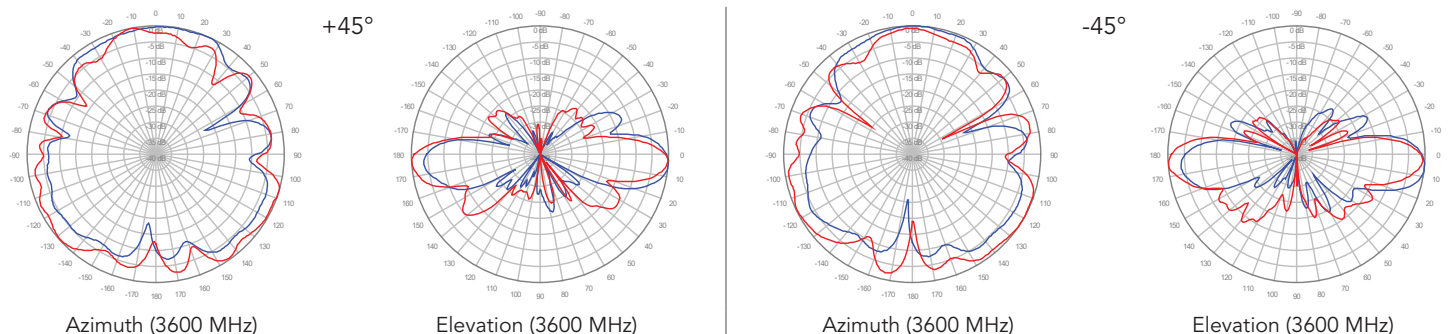


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.





2C4U6VT360X06Fwxys5

3600 MHz ————  
4000 MHz ————

■ P5, 4° TILT

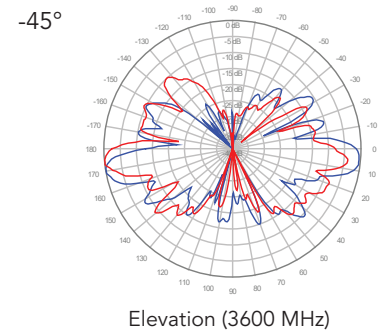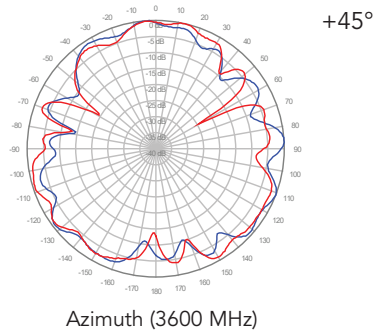


■ P6, 4° TILT

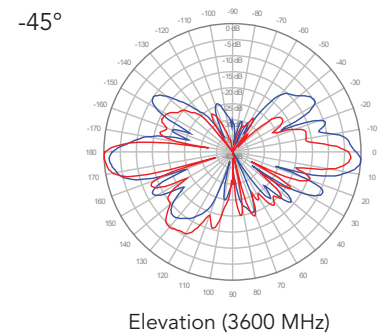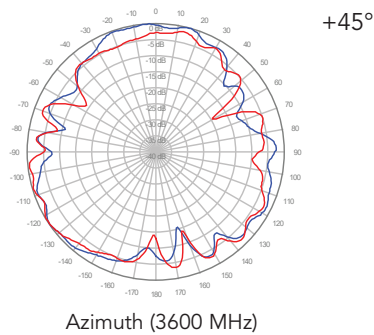


2C4U6VT360X06Fwxys5

3600 MHz ————  
4000 MHz ————


**P1, 6° TILT**

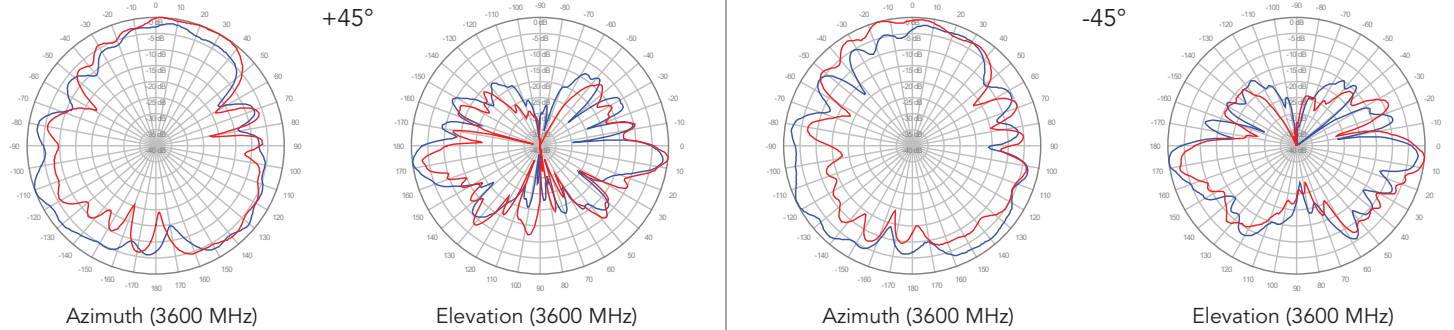


**P2, 6° TILT**

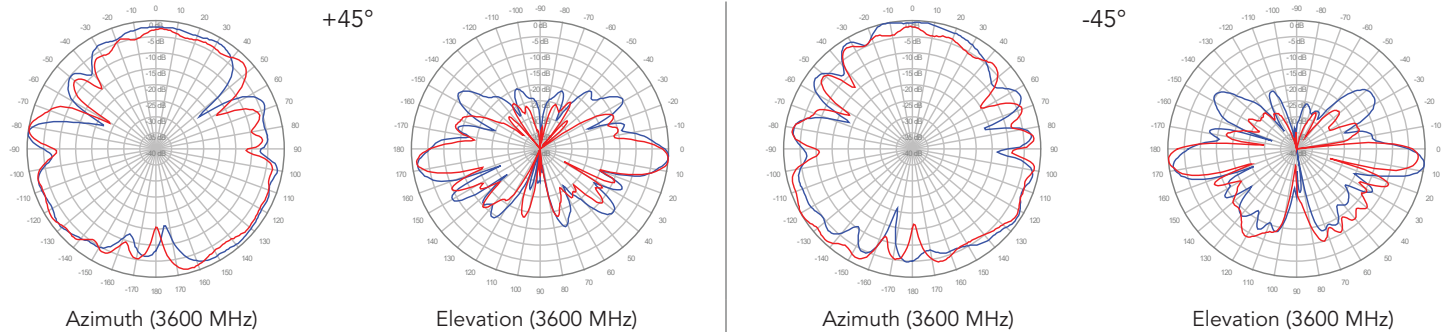

**P3, 6° TILT**

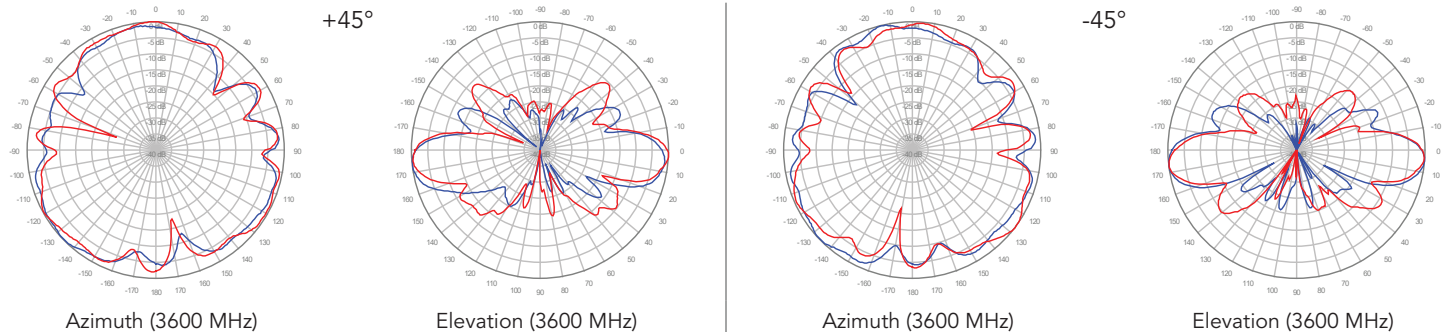

**P4, 6° TILT**

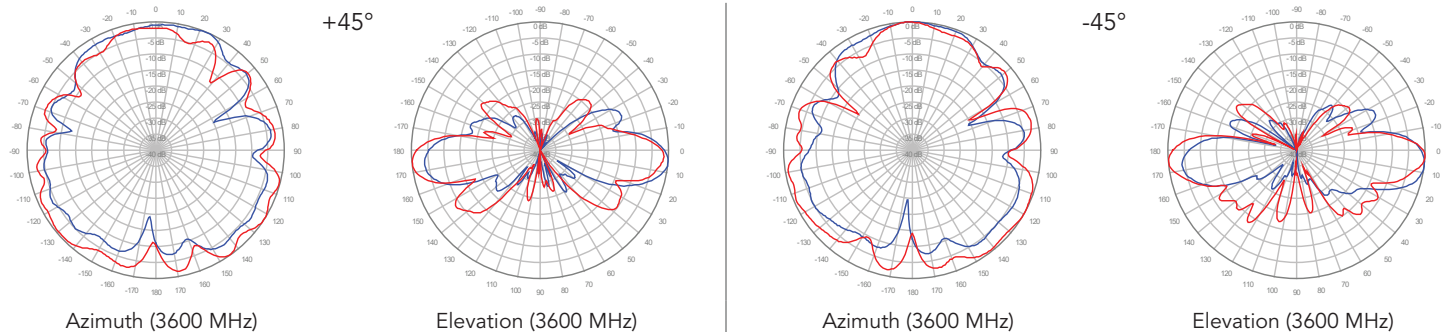





Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.



2C4U6VT360X06Fwxys5

3600 MHz ————  
4000 MHz ————

**P5, 6° TILT**

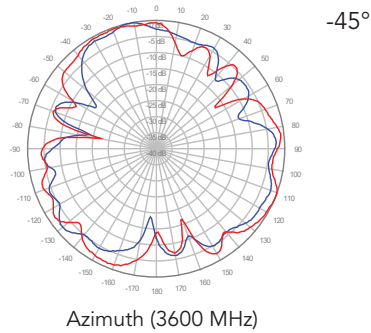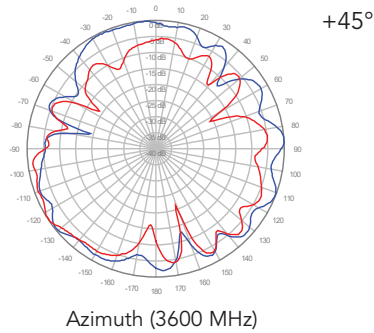

**P6, 6° TILT**

