

4U4MT360X06F_{xy}s0

PSEUDO OMNI | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)

Features

- Pseudo Omni configuration with 16 connectors
- Ideal for Small Cell / DAS applications
- Available with 4.3-10 connectors
- This antenna meets the requirements of the U-NII
- Available for order with a grey, brown or black radome



Connector Description

The antenna has 16 connectors located at the bottom.

Mid Band #1	Y1	Pseudo Omni	1695-2700 MHz	(2x) 4.3-10 Female
Mid Band #2	Y2	Pseudo Omni	1695-2700 MHz	(2x) 4.3-10 Female
Mid Band #3	Y3	Pseudo Omni	1695-2700 MHz	(2x) 4.3-10 Female
Mid Band #4	Y4	Pseudo Omni	1695-2700 MHz	(2x) 4.3-10 Female
Mid Band #5	Y5	Pseudo Omni	3550-3700 MHz	(2x) 4.3-10 Female
Mid Band #6	Y6	Pseudo Omni	3550-3700 MHz	(2x) 4.3-10 Female
High Band #1	V1	Pseudo Omni	5150-5925 MHz	(2x) 4.3-10 Female
High Band #2	V2	Pseudo Omni	5150-5925 MHz	(2x) 4.3-10 Female

Electrical Characteristics		Y1, Y2, Y3, Y4				Y5 Y6	V1 V2
Frequency Bands (MHz)		(4x) 1695-2700				(2x) 3550-3700	(2x) 5150-5925
		1695-1880	1850-1990	1920-2200	2300-2700		
Polarization		(4x) ±45°				(2x) ±45°	(2x) ±45°
Horizontal Beamwidth		360°	360°	360°	360°	360°	360°
Vertical Beamwidth		23.4° ± 4.2°	21.7° ± 4.3°	20.9° ± 4.3°	17.1° ± 3.2°	37.1° ± 10.6°	22.9° ± 5.1°
Gain	BASTA	9.1 ± 0.5 dBi	8.9 ± 0.4 dBi	9.1 ± 0.7 dBi	9.6 ± 0.6 dBi	5.2 ± 0.5 dBi	5.1 ± 0.7 dBi
	Max	9.6 dBi	9.3 dBi	9.8 dBi	10.2 dBi	5.7 dBi	5.8 dBi
Electrical Downtilt (°)		(x) 2, 4, 6				(y) 0	(y) 0
Impedance		50Ω				50Ω	50Ω
VSWR		≤ 1.5:1				≤ 1.5:1	≤ 1.5:1
Upper Sidelobe Suppression		> 14 dB				N/A	> 13 dB
Isolation	Intraband	25 dB				25 dB	25 dB
	Interband	28 dB				28 dB	28 dB
IM3 (2x20W carrier)		< -153 dBc				N/A	N/A
Input Power		(8x) 300 W				(4x) 100W	(4x) 50W
U-NII Compliant		---				---	Yes
Number of Sectors, Pattern Shape		3 Sectors / Pseudo Omni					
Lightning Protection		Direct Ground					

Mechanical Characteristics


Antenna Dimensions (Height x Diameter)	610 x 371 mm	24.0 x 14.6 in
Weight without Mounting Bracket Kit	12.7 kg	28 lbs
Antenna Volume	0.07 m ³	2.3 ft ³
Survival Wind Speed	241 km/hr	150 mph
Wind Area	0.22 m ²	2.4 ft ²
Wind Load (160 km/hr or 100 mph)	191 N	43 lbf

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

4U4MT360X06F_{xy}s0

PSEUDO OMNI | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)

Bottom View - Labeling

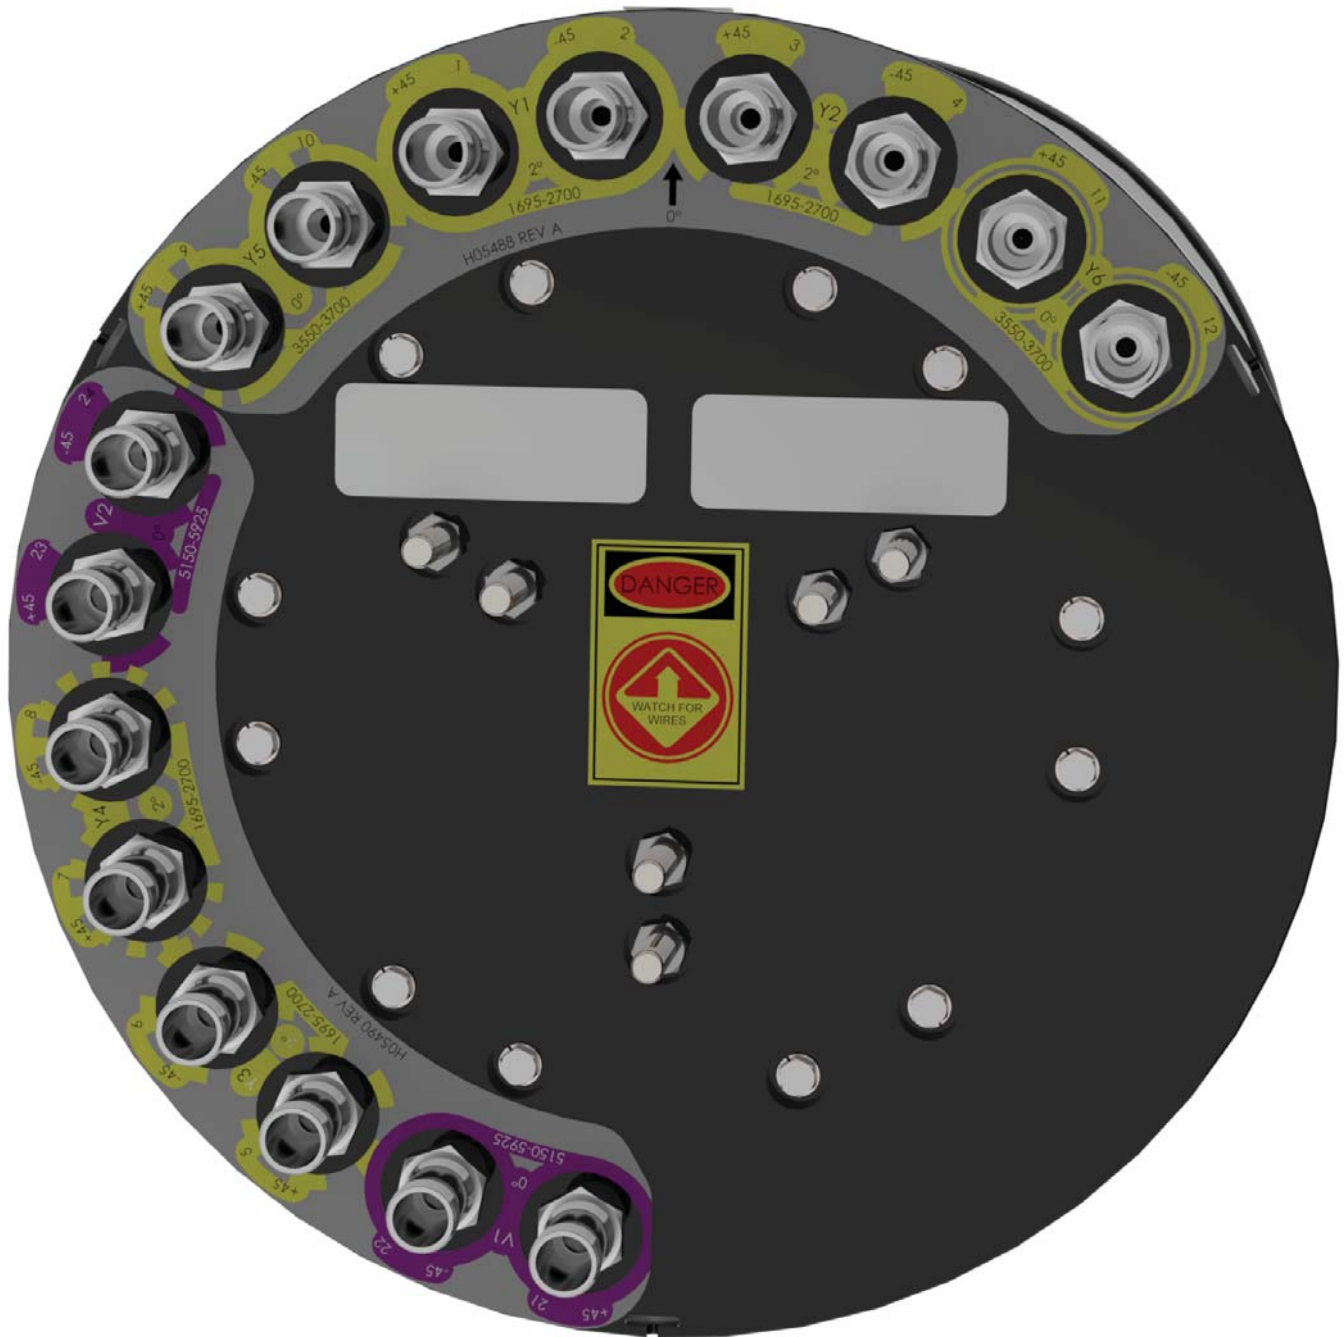

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

4U4MT360X06F_{xy}s0

PSEUDO OMNI | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)

Ordering Options

When ordering, select the Radome Color and Degree of Electrical Downtilt (**xy**) for each band

Radome Color	Electrical Downtilt Degree		Model Number
	Mid Band ■ Y1, ■ Y2, ■ Y3, ■ Y4 (x)	CBRS/LAA Bands ■ Y5, ■ Y6, ■ V1 ■ V2 (y)	
Grey Pantone 420 C	2°	0°	4U4MT360X06F 20 s0
	4°	0°	4U4MT360X06F 40 s0
	6°	0°	4U4MT360X06F 60 s0
	Y1 and Y2 = 2° Y3 and Y4 = 6°	0°	4U4MT360X06F AA s0
	Y1 and Y2 = 2° Y3 and Y4 = 4°	0°	4U4MT360X06F BB s0
	Y1 and Y2 = 4° Y3 and Y4 = 6°	0°	4U4MT360X06F CC s0
Brown Pantone 476 C	2°	0°	4U4MT360X06F 20 s0 BR
	4°	0°	4U4MT360X06F 40 s0 BR
	6°	0°	4U4MT360X06F 60 s0 BR
	Y1 and Y2 = 2° Y3 and Y4 = 6°	0°	4U4MT360X06F AA s0 BR
	Y1 and Y2 = 2° Y3 and Y4 = 4°	0°	4U4MT360X06F BB s0 BR
	Y1 and Y2 = 4° Y3 and Y4 = 6°	0°	4U4MT360X06F CC s0 BR
Black RAL 9011	2°	0°	4U4MT360X06F 20 s0 BK
	4°	0°	4U4MT360X06F 40 s0 BK
	6°	0°	4U4MT360X06F 60 s0 BK
	Y1 and Y2 = 2° Y3 and Y4 = 6°	0°	4U4MT360X06F AA s0 BK
	Y1 and Y2 = 2° Y3 and Y4 = 4°	0°	4U4MT360X06F BB s0 BK
	Y1 and Y2 = 4° Y3 and Y4 = 6°	0°	4U4MT360X06F CC s0 BK

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

4U4MT360X06F_{xy}s0

PSEUDO OMNI | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)

Mounting Kits

This antenna can be mounted using any of the following mounting kits. Mounting kits must be ordered separately.

Side Mounting Bracket Kit	Top Mounting Bracket Kit	Utility Pole Mounting Bracket Kit	Wide Diameter Pole Top Mounting Bracket Kit
CWT-MKS-SIDE	CWT-MKS-TOP	WB3X-MKS-01	CWT-MKS-BASE-xx
