

5005370A



This model is available in the iBwave In-Building Network Components Database - www.ibwavecomponents.com

Features

- Wideband omni antenna covering 698-4000 MHz
- Compact, lightweight and easy to install
- Passive Intermodulation < -150 dBc @ 2x20W
- Low return loss with stable performance

ORDERING OPTIONS Select from the following ordering options

SELECT	MODEL NUMBER
Antenna with N-Type Female Connectors	5005370A
Antenna with 4.310 Female Connectors	5005370A-4310

ELECTRICAL SPECIFICATIONS All Bands


Frequency Range	698-4000 MHz			
Frequency Sub-Range	698-806 MHz	806-960 MHz	1710-2700 MHz	3400-4000 MHz
Polarization	(2x) Linear			
Gain	3.0 ± 0.5 dBi	3.5 ± 0.5 dBi	4.5 ± 1.0 dBi	5.0 ± 1.0 dBi
Horizontal Beamwidth	360°	360°	360°	360°
Vertical Beamwidth (Typical)	90°	85°	45°	35°
Impedance	50Ω			
Isolation	> 17 dB	> 17 dB	> 20 dB	> 25 dB
VSWR	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0
Passive Intermodulation 3rd Order for 2x20 W Carriers	≤ -150 dBc	≤ -150 dBc	≤ -150 dBc	≤ -150 dBc
Maximum Power	50W			
Connector Type	2 Ports, N-Type Female			

MECHANICAL SPECIFICATIONS


Antenna	Diameter	Ø218 mm (8.6 in)
	Height	40 mm (1.6 in)
Net Weight	0.5 kg (1.1 lbs)	
Operating Temperature	-55° to +60° C (-67° to +140° F)	
Operational Humidity	< 95%	
Radome Material	ABS	
Radome Color	White, RAL 9003	
Mounting Options	Fasteners included for mounting on ceiling tile and hard surfaces Not suitable for metal ceilings	

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


5005370A




Horizontal, 698-960 MHz




Horizontal, 1710-2170 MHz

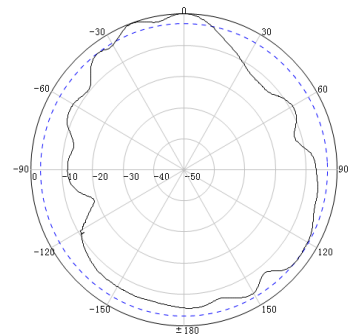


Horizontal, 2170-2700 MHz



Vertical, 698-960 MHz



Vertical, 1710-2170 MHz

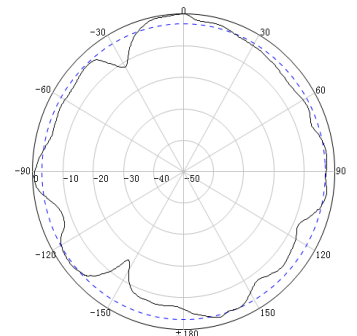

Vertical, 2170-2700 MHz

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.