

Integra compatible

5G Ready

65°

2340 mm

5798470-3


5798470G-3 5798470Dx-3

8-Band, 48-Port, 65°, XPOL, Tri-Sector Antenna, Variable Tilt, 2340 mm

- Octa band antenna, dual polarisation, 48 connectors
- Integra compatible - ability to upgrade and recycle, saving 50% carbon emission
- Independent tilt on each band 2-12° / 2-12° / 2-12° / 2-12° / 2-12° / 2-12° / 2-12° / 2-12°
- MET and RET versions, 3GPP/AISG2.0, in multiple single RET (multiple device type1) or in Multi-RET (device type 17, with firmware above MD3.10).
- Our patented, RET module controlling all tilt angles, fully inserted inside the antenna (field replaceable).
- 5G optimal integration with optional mMIMO & 8T8R Trio Hybrid Kits (compatibility list available on request).



PRODUCT OVERVIEW	Frequency Range (MHz)	698-803	880-960	698-960	1427-2180	1427-2180	2490-2690	1427-2690	2490-2690
	Array	■ R1	■ R2	■ R3	■ B1	■ B2	■ Y1	■ Y2	■ Y3
	Connector	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16
	Polarization	XPOL	XPOL	XPOL	XPOL	XPOL	XPOL	XPOL	XPOL
	Azimuth Beam-width (avg)	65°	65°	65°	65°	65°	65°	65°	65°
	Electrical Downtilt	2-12°	2-12°	2-12°	2-12°	2-12°	2-12°	2-12°	2-12°
	Dimensions	2340 x Ø970 mm							

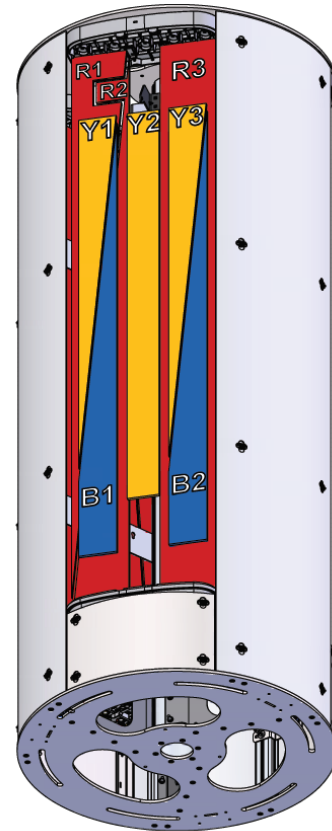

ORDERING OPTIONS Select from the different options listed below

SELECT ELECTRICAL DOWNTILT CONTROL & AISG PROTOCOL	SELECT CONNECTOR TYPE	SELECT ACTUATOR	SELECT NUMBER OF SECTORS	ANTENNA MODEL NUMBER	
Manual Electrical Tilt (MET)	4.3-10 Female	---	Three Sectors	5798470-3	
			Two Sectors	5798470-2	
			One Sector	5798470-1	
Remote Electrical Tilt (RET) AISG v2.0 / 3GPP		Multi-Device Control Unit (MDCU)	Multi-Device Dual Unit (MDDU)	Three Sectors	5798470G-3
				Two Sectors	5798470G-2
				One Sector	5798470G-1
		Three Sectors		5798470Dx*-3	
		Two Sectors		5798470Dx*-2	
		One Sector		5798470Dx*-1	

*Pre-commissioned configuration; Contact Amphenol for further details.



Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

Integra compatible

5G Ready

65°

2340 mm

5798470-3

5798470G-3 5798470DX-3

8-Band, 48-Port, 65°, XPOL, Tri-Sector Antenna, Variable Tilt, 2340 mm

ELECTRICAL SPECIFICATIONS Filtered Array (R2)

■ R1

Frequency Range	MHz	698-803	
Polarization	---	±45°	
Gain	Over all Tilts	dBi	13.9 ± 0.4
Azimuth Beamwidth	degrees	74.8° ± 3.7°	
Elevation Beamwidth	degrees	11.0° ± 0.8°	
Electrical Downtilt	degrees	2°-12°	
Impedance	Ohms	50	
VSWR (Return Loss)	--- (dB)	< 1.5 (>14)	
Passive Intermodulation 3rd Order for 2 x 20W Carriers	dBc	< -153	
Front-to-Back Ratio, Total Power, ±30°	dB	> 23.5	
Upper Sidelobe Suppression, Peak to 20°	dB	> 15.8	
Cross Polar Discrimination (XPD) Sector Edges (±60°)	dB	> 8.4	
Maximum Effective Power Per Port	Watts	250 W	
Inter/Intra Cluster Isolation	dB	> 25	

All parameters are compliant with BASTA revision V11.1

ELECTRICAL SPECIFICATIONS Filtered Array (R1)

■ R2

Frequency Range	MHz	698-803	
Polarization	---	±45°	
Gain	Over all Tilts	dBi	13.9 ± 0.4
Azimuth Beamwidth	degrees	74.8° ± 3.7°	
Elevation Beamwidth	degrees	11.0° ± 0.8°	
Electrical Downtilt	degrees	2°-12°	
Impedance	Ohms	50	
VSWR (Return Loss)	--- (dB)	< 1.5 (>14)	
Passive Intermodulation 3rd Order for 2 x 20W Carriers	dBc	< -153	
Front-to-Back Ratio, Total Power, ±30°	dB	> 23.5	
Upper Sidelobe Suppression, Peak to 20°	dB	> 15.8	
Cross Polar Discrimination (XPD) Sector Edges (±60°)	dB	> 8.4	
Maximum Effective Power Per Port	Watts	250 W	
Inter/Intra Cluster Isolation	dB	> 25	

All parameters are compliant with BASTA revision V11.1

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

Integra compatible

5G Ready

65°

2340 mm

5798470-3

5798470G-3 5798470Dx-3

8-Band, 48-Port, 65°, XPOL, Tri-Sector Antenna, Variable Tilt, 2340 mm

ELECTRICAL SPECIFICATIONS Ultra Low Band

■ R3

Frequency Range		MHz	698-960		
		MHz	698-806	790-862	880-960
Polarization		---	±45°		
Gain	Over all Tilts	dBi	14.2 ± 0.5	15.0 ± 0.6	15.5 ± 0.5
Azimuth Beamwidth		degrees	74.5° ± 4.6°	67.5° ± 3.8°	61.1° ± 5.0°
Elevation Beamwidth		degrees	11.5° ± 1.0°	10.1° ± 0.7°	9.1° ± 0.6°
Electrical Downtilt		degrees	2°-12°		
Impedance		Ohms	50		
VSWR (Return Loss)		--- (dB)	< 1.5 (>14)		
Passive Intermodulation 3rd Order for 2 x 20W Carriers		dBc	< -153		
Front-to-Back Ratio, Total Power, ±30°		dB	> 22.7	> 20.7	> 23.0
Upper Sidelobe Suppression, Peak to 20°		dB	> 18.1	> 15.6	> 15.4
Cross Polar Discrimination (XPD) Sector Edges (±60°)		dB	> 9.9	> 7.5	> 6.7
Maximum Effective Power Per Port		Watts	200 W		
Inter/Intra Cluster Isolation		dB	> 25		

All parameters are compliant with BASTA revision V11.1

ELECTRICAL SPECIFICATIONS Filtered Array (Y1)

■ B1

Frequency Range		MHz	1427-2180		
		MHz	1427-1518	1695-1880	1920-2180
Polarization		---	±45°		
Gain	Over all Tilts	dBi	15.5 ± 0.5	16.4 ± 0.4	16.8 ± 0.4
Azimuth Beamwidth		degrees	69.8° ± 4.8°	69.0° ± 3.3°	66.6° ± 4.1°
Elevation Beamwidth		degrees	7.3° ± 0.4°	6.0° ± 0.2°	5.5° ± 0.5°
Electrical Downtilt		degrees	2°-12°		
Impedance		Ohms	50		
VSWR (Return Loss)		--- (dB)	< 1.5 (>14)		
Passive Intermodulation 3rd Order for 2 x 20W Carriers		dBc	< -153		
Front-to-Back Ratio, Total Power, ±30°		dB	> 25.0	> 27.2	> 26.1
Upper Sidelobe Suppression, Peak to 20°		dB	> 13.8	> 13.4	> 12.2
Cross Polar Discrimination (XPD) Sector Edges (±60°)		dB	> 7.6	> 6.9	> 7.9
Maximum Effective Power Per Port		Watts	200 W		
Inter/Intra Cluster Isolation		dB	> 25		

All parameters are compliant with BASTA revision V11.1

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

Integra compatible

5G Ready

65°

2340 mm

5798470-3

5798470G-3 5798470Dx-3

8-Band, 48-Port, 65°, XPOL, Tri-Sector Antenna, Variable Tilt, 2340 mm

ELECTRICAL SPECIFICATIONS Filtered Array (Y3)

■ B2

Frequency Range	MHz	1427-2180			
	MHz	1427-1518	1695-1880	1920-2180	
Polarization	---	±45°			
Gain	Over all Tilts	dBi	15.4 ± 0.5	16.5 ± 0.5	16.9 ± 0.5
Azimuth Beamwidth	degrees	70.2° ± 4.1°	69.1° ± 4.3°	65.8° ± 4.7°	
Elevation Beamwidth	degrees	7.3° ± 0.4°	6.1° ± 0.3°	5.5° ± 0.5°	
Electrical Downtilt	degrees	2°-12°			
Impedance	Ohms	50			
VSWR (Return Loss)	--- (dB)	< 1.5 (>14)			
Passive Intermodulation 3rd Order for 2 x 20W Carriers	dBc	< -153			
Front-to-Back Ratio, Total Power, ±30°	dB	> 23.6	> 25.9	> 27.2	
Upper Sidelobe Suppression, Peak to 20°	dB	> 12.8	> 12.7	> 11.8	
Cross Polar Discrimination (XPD) Sector Edges (±60°)	dB	> 8.7	> 6.1	> 7.8	
Maximum Effective Power Per Port	Watts	200 W			
Inter/Intra Cluster Isolation	dB	> 25			

All parameters are compliant with BASTA revision V11.1

ELECTRICAL SPECIFICATIONS Filtered Array (B1)

■ Y1

Frequency Range	MHz	2490-2690		
Polarization	---	±45°		
Gain	Over all Tilts	dBi	16.9 ± 0.4	
Azimuth Beamwidth	degrees	61.2° ± 5.8°		
Elevation Beamwidth	degrees	5.0° ± 0.4°		
Electrical Downtilt	degrees	2°-12°		
Impedance	Ohms	50		
VSWR (Return Loss)	--- (dB)	< 1.5 (>14)		
Passive Intermodulation 3rd Order for 2 x 20W Carriers	dBc	< -153		
Front-to-Back Ratio, Total Power, ±30°	dB	> 25.3		
Upper Sidelobe Suppression, Peak to 20°	dB	> 13.1		
Cross Polar Discrimination (XPD) Sector Edges (±60°)	dB	> 6.9		
Maximum Effective Power Per Port	Watts	200 W		
Inter/Intra Cluster Isolation	dB	> 25		

All parameters are compliant with BASTA revision V11.1

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

Integra compatible

5G Ready

65°

2340 mm

5798470-3

5798470G-3 5798470Dx-3

8-Band, 48-Port, 65°, XPOL, Tri-Sector Antenna, Variable Tilt, 2340 mm

ELECTRICAL SPECIFICATIONS Filtered Array (Y3)

■ Y2

Frequency Range		MHz	1427-2690			
		MHz	1427-1518	1695-1880	1920-2180	2490-2690
Polarization		---	±45°			
Gain	Over all Tilts	dBi	15.7 ± 0.3	17.0 ± 0.4	17.3 ± 0.5	17.4 ± 0.5
Azimuth Beamwidth		degrees	72.1° ± 4.5°	63.4° ± 4.6°	61.4° ± 4.4°	65.5° ± 5.2°
Elevation Beamwidth		degrees	7.0° ± 0.3°	5.8° ± 0.4°	5.2° ± 0.4°	4.1° ± 0.3°
Electrical Downtilt		degrees	2°-12°			
Impedance		Ohms	50			
VSWR (Return Loss)		--- (dB)	< 1.5 (>14)			
Passive Intermodulation 3rd Order for 2 x 20W Carriers		dBc	< -153			
Front-to-Back Ratio, Total Power, ±30°		dB	> 26.0	> 24.4	> 28.0	> 25.3
Upper Sidelobe Suppression, Peak to 20°		dB	> 15.6	> 15.4	> 16.6	> 14.5
Cross Polar Discrimination (XPD) Sector Edges (±60°)		dB	> 6.6	> 9.6	> 9.4	> 7.5
Maximum Effective Power Per Port		Watts	200 W			
Inter/Intra Cluster Isolation		dB	> 25			

All parameters are compliant with BASTA revision V11.1

ELECTRICAL SPECIFICATIONS MEGA Wide Band

■ Y3

Frequency Range		MHz	2490-2690
Polarization		---	±45°
Gain	Over all Tilts	dBi	16.9 ± 0.4
Azimuth Beamwidth		degrees	59.5° ± 4.6°
Elevation Beamwidth		degrees	4.9° ± 0.5°
Electrical Downtilt		degrees	2°-12°
Impedance		Ohms	50
VSWR (Return Loss)		--- (dB)	< 1.5 (>14)
Passive Intermodulation 3rd Order for 2 x 20W Carriers		dBc	< -153
Front-to-Back Ratio, Total Power, ±30°		dB	> 24.3
Upper Sidelobe Suppression, Peak to 20°		dB	> 12.1
Cross Polar Discrimination (XPD) Sector Edges (±60°)		dB	> 6.0
Maximum Effective Power Per Port		Watts	200 W
Inter/Intra Cluster Isolation		dB	> 25

All parameters are compliant with BASTA revision V11.1

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

Integra compatible

5G Ready

65°

2340 mm

5798470-3

5798470G-3 5798470Dx-3

8-Band, 48-Port, 65°, XPOL, Tri-Sector Antenna, Variable Tilt, 2340 mm

ELECTRICAL DOWNTILT CONTROL

For multiband antennas, electrical downtilt for each band can be controlled separately.

Manual Electrical Tilt (MET) Control	A colored knob at the end of the tilt indicator allows change of the tilt without need of a tool. The knob color is identical to the corresponding connector color. The manual tilt 'override' function is always available with no need to remove the physical RET motor.
Remote Electrical Tilt (RET) Control	The remote control of the electrical tilt is managed by a Multi-Device Control Unit (MDCU) or a Multi-Device Dual Unit (MDDU) inserted in the bottom of the antenna. See details below and refer to the ordering options to see which actuators are available with this particular antenna. A single actuator individually controls the tilt of each band (no need for daisy chain cables between the bands). This module does not add any additional length to the antenna.

RET ACTUATOR

Amphenol's RET-READY antennas are delivered with the RET Actuator already installed and pre-commissioned with all antenna parameters. Every RET device is factory configured and calibrated so the antenna is ready to be used once delivered to the site which means that there is no need for further installation of RET devices or for programming their configuration or for running a calibration process.

RET-READY ACTUATORS	Multi-Device Control Unit (MDCU). The MDCU is an electronic module that allows the remote control of the electrical downtilt (RET) in Amphenol antennas with factory embedded motors. The MDCU is factory installed. Refer to the ORDERING OPTIONS for availability with this model.	
	Multi-Device Dual Unit (MDDU). The MDDU allows two separate RET Controllers to independently drive the RETs in antennas with factory embedded motors (for antenna sharing or two technologies). The MDDU is factory installed. Refer to the ORDERING OPTIONS for availability with this model.	
Number of RET-READY Actuators	One per antenna	
Input Voltage	+10 to +30 V	
Power Consumption	Idle State (AISG P1)	0.5 W
	High Power Mode (AISG P2)	3 W
Protocol	3GPP/AISG 2.0	
Tilt Change Duration	Less than 15 seconds, typical (may vary dependent on antenna type and outdoor temperature)	
Precision	±0.5°	
Tilt Change Capability	50,000 minimum	
RET Interface	MDCU	One pair of AISG Male and Female (type IEC60130-9)
	MDDU	Two male AISG 8 pin connectors (type IEC60130-9 Ed 3.0)
Field Replaceable Unit	Yes	


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

Integra compatible	5G Ready	65°	2340 mm
--------------------	----------	-----	---------

5798470-3

5798470G-3 5798470Dx-3

8-Band, 48-Port, 65°, XPOL, Tri-Sector Antenna, Variable Tilt, 2340 mm

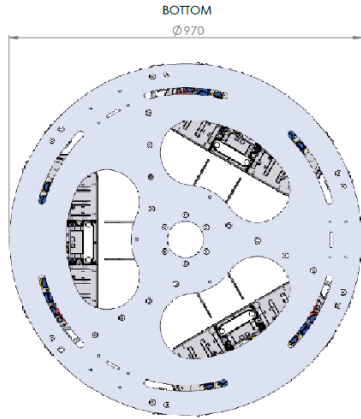

Interface drawing on request

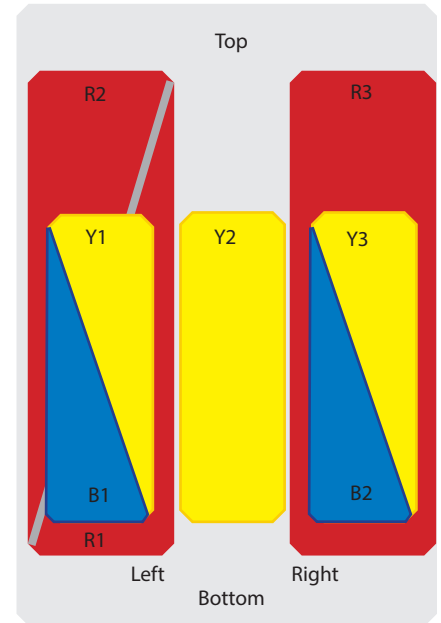


Diagram shown at right depicts the view from the front of the antenna. The illustration is not shown to scale.

ARRAY LAYOUT	ARRAY	FREQUENCY	CONNECTOR	CONNECTOR TYPE
	■ R1	698-803	1-2	4.3-10 Female
	■ R2	880-960	3-4	4.3-10 Female
	■ R3	698-960	5-6	4.3-10 Female
	■ B1	1427-2180	7-8	4.3-10 Female
	■ B2	1427-2180	9-10	4.3-10 Female
	■ Y1	2490-2690	11-12	4.3-10 Female
	■ Y2	1427-2690	13-14	4.3-10 Female
	■ Y3	2490-2690	15-16	4.3-10 Female

MECHANICAL SPECIFICATIONS

Length	mm (in)	2340 (92.1)	
Diameter	mm (in)	970 (38.1)	
Net Weight	Three Sectors	kg (lbs)	360 (794)
	Two Sectors	kg (lbs)	310 (683)
	One Sector	kg (lbs)	260 (573)
Windload (EN 1991-1-4:2005 using Wind Tunnel Coefficients)	Calculation	km/h (mph)	150 (93.2)
	Value	N (lbf)	2090 (470)
Operational Wind Speed	km/h (mph)	160 (99.4)	
Survival Wind Speed	km/h (mph)	200 (124)	
Radome Color	---	Gray RAL7035	
Radome Material	---	Outdoor Fiberglass	
Lightning Protection	---	Direct Ground	
Shipping	Shipping Dimensions (Length x Width x Depth)	mm (in)	2450 x 1080 x 1080 (96.5 x 42.5 x 42.5)
	Shipping Weight (Three Sectors)	kg (lbs)	535 (1179)
	Shipping Volume	m ³ (ft ³)	2.86 (71)

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

Integra compatible

5G Ready

65°

2340 mm

5798470-3

5798470G-3 5798470Dx-3

8-Band, 48-Port, 65°, XPOL, Tri-Sector Antenna, Variable Tilt, 2340 mm

ENVIRONMENTAL SPECIFICATIONS

Environmental Standard	---	ETS 300 019
Operating Temperature	° C (° F)	-40° to +60° (-40° to 140°)
Product Environmental Compliance	---	Product is RoHs Compliant

ACCESSORIES All accessories are ordered separately unless otherwise indicated

ITEM	MODEL NUMBER	WEIGHT
Lightning Rod Kit for Trio Nodeline and Trio Hybrid Kit (optional)	TLX-LPN	2 kg (4.4 lbs)

INSTALLATION Please read all installation notes before installing this product.



Always attach the antenna by all mounting points.

Do not install the antenna with the connectors facing upwards.

