

6880388GH

6880388NGH

3-Band, 6-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2487 mm

- Tri band antenna, dual polarisation, 6 connectors
- Independent, continuously adjustable tilt on each band 2-10° / 2-10° / 2-10°
- RET version, 3GPP/AISG2.0 with three integrated RCUs

ORDERING OPTIONS	MODEL NUMBER
Antenna with 4.3-10 Connectors	6880388NGH
Antenna with 7/16-DIN Connectors	6880388GH

ACCESS PORT DESCRIPTION (CONNECTORS)			
The antenna has 6 colour-coded connectors located at the bottom face.			
Frequency Designation	R1	Y1	Y2
Frequency Range	698-960 MHz	1695-2690 MHz	1695-2690 MHz
Polarisation	Xpol	Xpol	Xpol
Horizontal Beamwidth	65°	65°	65°
Electrical Downtilt Range	2-10°	2-10°	2-10°
Connector Type	(2x) 4.3-10 or 7/16-DIN Female	(2x) 4.3-10 or 7/16-DIN Female	(2x) 4.3-10 or 7/16-DIN Female

ELECTRICAL CHARACTERISTICS		R1		
Frequency Bands		698-960 MHz		
		698-806 MHz	790-894 MHz	880-960 MHz
Gain	at Mid Tilt	16.2 dBi	16.6 dBi	16.9 dBi
	Over All Tilts	16.1 ± 0.6 dBi	16.5 ± 0.6 dBi	16.8 ± 0.6 dBi
Input Impedance		50Ω		
VSWR		≤ 1.5		
Polarisation		±45°		
Horizontal Beamwidth (-3 dB)		70° ± 3.9°	67° ± 3.9°	63° ± 3.1°
Vertical Beamwidth (-3 dB)		8.7° ± 0.8°	7.9° ± 0.7°	7.2° ± 0.5°
Electrical Downtilt Range		2-10°		
Cross-Polar Isolation		≥ 28 dB		
Interband Isolation		≥ 28 dB		
Port-to-Port Isolation		≥ 25 dB		
Upper Sidelobe Suppression, First Upper Lobe		≥ 17 dB	≥ 17 dB	≥ 18 dB
Front-to-Back Ratio (@ 180° ± 30°)		≥ 22 dB	≥ 24 dB	≥ 26 dB
Cross Polar Ratio	Main Direction (0°)	≥ 17 dB	≥ 17 dB	≥ 17 dB
	Sector Edges (±60°)	≥ 8 dB	≥ 7 dB	≥ 6 dB
Maximum Power (Per Port)		350 W (at 50° C ambient temperature)		
Intermodulation 3rd Order for 2 x 43 dBm Carrier		< -153 dBc		
Grounding		DC Ground		

Standard values based on NGMN-P-BASTA version 10.0 recommendation.

Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6880388GH

6880388NGH

3-Band, 6-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2487 mm

ELECTRICAL CHARACTERISTICS		Y1				
Frequency Bands		1695-2690 MHz				
		1695-1880 MHz	1850-1990 MHz	1920-2170 MHz	2300-2400 MHz	2490-2690 MHz
Gain	At Mid Tilt	17.1 dBi	17.3 dBi	17.5 dBi	17.8 dBi	17.9 dBi
	Over All Tilts	17.0 ± 0.6 dBi	17.2 ± 0.6 dBi	17.4 ± 0.6 dBi	17.7 ± 0.5 dBi	17.8 ± 0.7 dBi
Input Impedance		50Ω				
VSWR		≤ 1.5				
Polarisation		±45°				
Horizontal Beamwidth (-3 dB)		67° ± 5.5°	64° ± 4.1°	64° ± 4.1°	62° ± 4.1°	61° ± 4.9°
Vertical Beamwidth (-3 dB)		7.1° ± 0.6°	6.4° ± 0.5°	5.9° ± 0.5°	5.5° ± 0.3°	5.1° ± 0.3°
Electrical Downtilt Range		2-10°				
Cross Polar Isolation		≥ 28 dB				
Interband Isolation		≥ 28 dB				
Port-to-Port Isolation		≥ 25 dB				
Upper Sidelobe Suppression, First Upper Lobe		≥ 17 dB	≥ 17 dB	≥ 17 dB	≥ 17 dB	≥ 17 dB
Front-to-Back Ratio (@ 180° ± 30°)		≥ 24 dB	≥ 25 dB	≥ 25 dB	≥ 25 dB	≥ 24 dB
Cross Polar Discrimination	Main Direction	≥ 17 dB	≥ 17 dB	≥ 18 dB	≥ 17 dB	≥ 17 dB
	Sector Edges	≥ 6 dB	≥ 7 dB	≥ 7 dB	≥ 4 dB	≥ 4 dB
Maximum Power (Per Port)		250 W (at 50°C ambient temperature)				
Intermodulation 3rd (2x43 dBm Carrier)		< -153 dBc				
Grounding		DC Ground				

Standard values based on NGMN-P-BASTA version 10.0 recommendation.

ELECTRICAL CHARACTERISTICS		Y2				
Frequency Bands		1695-2690 MHz				
		1695-1880 MHz	1850-1990 MHz	1920-2170 MHz	2300-2400 MHz	2490-2690 MHz
Gain	At Mid Tilt	17.2 dBi	17.4 dBi	17.6 dBi	17.9 dBi	18.0 dBi
	Over All Tilts	17.1 ± 0.6 dBi	17.3 ± 0.6 dBi	17.5 ± 0.6 dBi	17.8 ± 0.5 dBi	17.9 ± 0.7 dBi
Input Impedance		50Ω				
VSWR		≤ 1.5				
Polarisation		±45°				
Horizontal Beamwidth (-3 dB)		66° ± 5.5°	67° ± 4.1°	65° ± 4.1°	62° ± 4.1°	59° ± 4.9°
Vertical Beamwidth (-3 dB)		7.1° ± 0.6°	6.4° ± 0.5°	5.9° ± 0.5°	5.5° ± 0.3°	5.1° ± 0.3°
Electrical Downtilt Range		2-10°				
Cross Polar Isolation		≥ 28 dB				
Interband Isolation		≥ 28 dB				
Port-to-Port Isolation		≥ 25 dB				
Upper Sidelobe Suppression, First Upper Lobe		≥ 17 dB	≥ 17 dB	≥ 17 dB	≥ 17 dB	≥ 17 dB
Front-to-Back Ratio (@ 180° ± 30°)		≥ 24 dB	≥ 25 dB	≥ 25 dB	≥ 25 dB	≥ 24 dB
Cross Polar Discrimination	Main Direction	≥ 17 dB	≥ 17 dB	≥ 18 dB	≥ 17 dB	≥ 17 dB
	Sector Edges	≥ 6 dB	≥ 7 dB	≥ 7 dB	≥ 4 dB	≥ 4 dB
Maximum Power (Per Port)		250 W (at 50°C ambient temperature)				
Intermodulation 3rd (2x43 dBm Carrier)		< -153 dBc				
Grounding		DC Ground				



Standard values based on NGMN-P-BASTA version 10.0 recommendation.

Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6880388GH

6880388NGH

3-Band, 6-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2487 mm

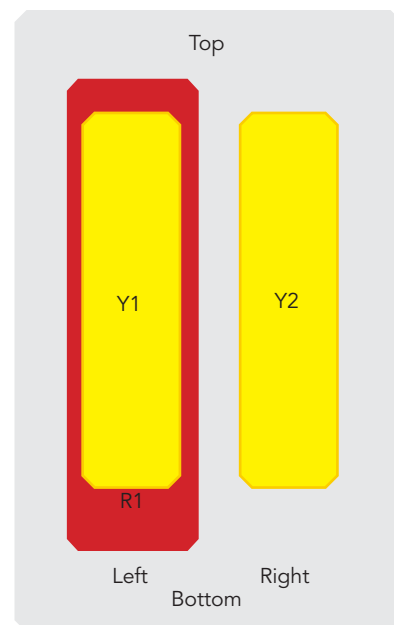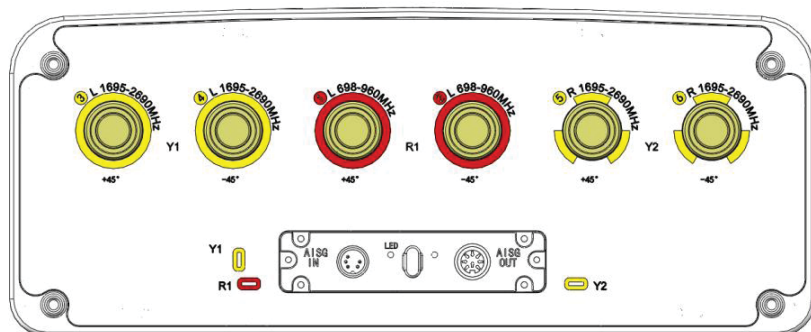

ARRAY LAYOUT	ARRAY	FREQUENCY	CONNECTOR	CONNECTOR TYPE
	R1	698-960	1-2	4.3-10 or 7/16-DIN Female
	Y1	1695-2690	3-4	4.3-10 or 7/16-DIN Female
	Y2	1695-2690	5-6	4.3-10 or 7/16-DIN Female

Diagram shown at right depicts the view from the front of the antenna. The illustration is not shown to scale.

INTEGRATED RET PROPERTIES	
Power Supply	10-30VDC
Power Consumption	< 1W (Idle), < 10W (In Motion)
Hardware Interface	Pin3: RS485B; Pin5: RS485A; Pin6: 10-30V; Pin7: DC Return According to AISG/3GPP
Protocol Supported	Compliant with 3GPP/AISGv2.0
Adjustment Time (Full Range)	≤ 90 s (typical, depending on Antenna type)
Adjustment Cycles	> 10,000
Torque Max	≥ 160 mN.m
Safety Standard	Compliant to EN 60950/UL 60950/RoHS, CE
Protection Class	IP65
Lightning Protection Rating	IEC 61000-4-5 Current Pulse Profile, 8/20 μs 10 Repetitions Min. @ 8 kA IEC61312-1 B Protection against lightning electromagnetic impulse 10/350 μs, 200 @ 0.6 kA
Connectors	(2x) 8-Pin Circle Connector According to IEC 60130-9 and AISG.C-485 Daisy Chain In: Male; Daisy Chain Out: Female


Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6880388GH

6880388NGH

3-Band, 6-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2487 mm

ENVIRONMENTAL CHARACTERISTICS		PACKAGING	
Operating Temperature	-40° to +60° C		
MECHANICAL CHARACTERISTICS		Carton Box 2.687 x 0.492 x 0.277 m	
Dimensions (Height x Width x Depth)	2487 x 397 x 157 mm		
Weight (excluding mounting accessory)	31 kg		
Radome Material, Colour	UPVC, Light Grey		
Reflector Material	Aluminum		
Maximum Wind Speed	≥ 200 km/h		
Wind Loads (at 150 km/h)	Frontal	915 N	
	Lateral	550 N	
	Rear	1025 N	
MOUNTING KIT OPTIONS		POLE DIAMETER	MECHANICAL TILT
All mounting bracket kits are ordered separately unless otherwise indicated.			
Mounting Bracket Kit (Included)		Ø50-Ø125 mm	0-10°

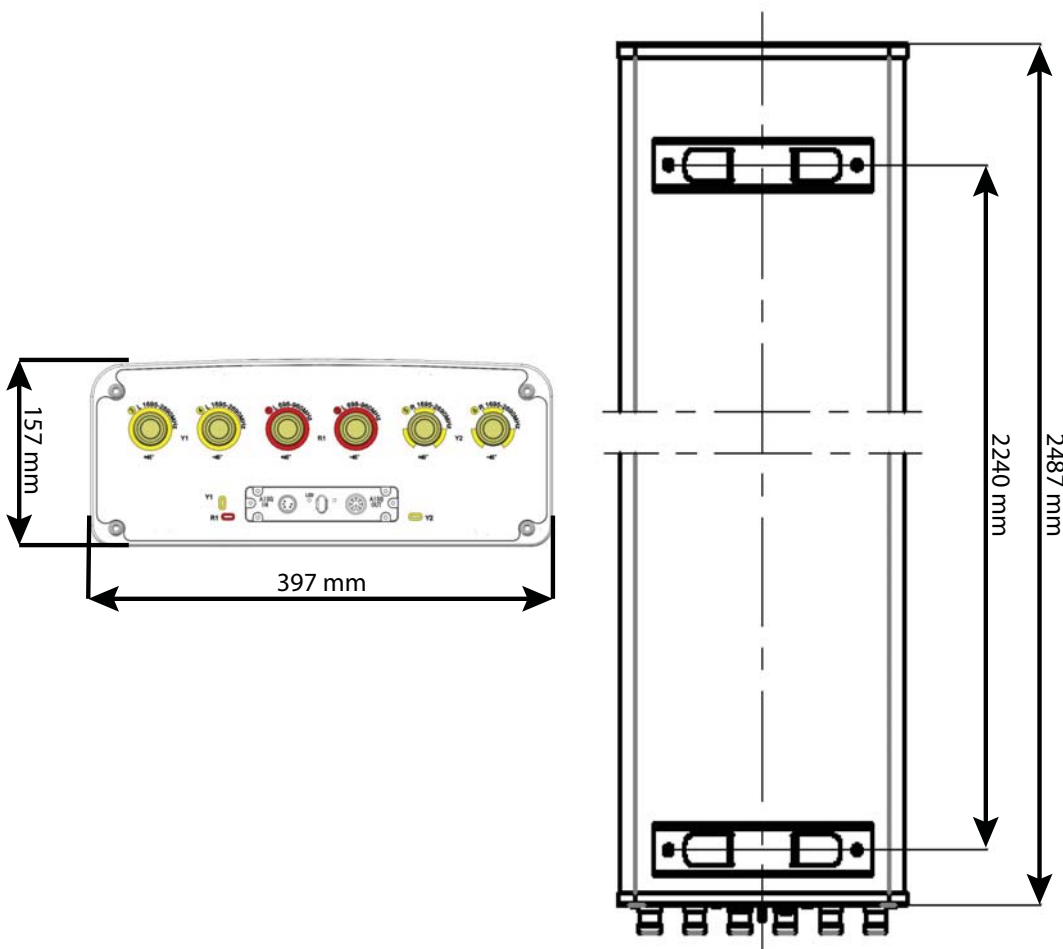

Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.