

6886508NG

6-Band, 19-Port, 65°, XPOL, TDD Hybrid Panel Antenna, Variable Tilt, 1397 mm

- Hexa band antenna, Dual polarisation, 19 connectors
- Independent, continuously adjustable tilt on each band 2-16° / 2-12° / 2-12° / 2-12° / 2-12° / 2-12°
- RET version, 3GPP/AISG2.0 with six integrated RCU

ACCESS PORT DESCRIPTION (CONNECTORS)

The antenna has 19 colour-coded connectors located at the bottom face.

Frequency Designation	R1	Y1	Y2	Y3	Y4	P1
Frequency Range	698-960 MHz	1710-2690 MHz	1710-2690 MHz	1710-2690 MHz	1710-2690 MHz	3300-3800 MHz
Polarisation	Xpol	Xpol	Xpol	Xpol	Xpol	Xpol
Horizontal Beamwidth	65°	65°	65°	65°	65°	65°
Electrical Downtilt Range	2-16°	2-12°	2-12°	2-12°	2-12°	2-12°
Connector Type	(2x) 4.3-10 Female	(2x) 4.3-10 Female	(2x) 4.3-10 Female	(2x) 4.3-10 Female	(2x) 4.3-10 Female	(1x) MQ5 Male (4 RF + 1 Calibration) & (1x) MQ4 Male (4 RF)

ELECTRICAL CHARACTERISTICS

		R1			
Frequency Bands		698-960 MHz			
		698-806 MHz	790-894 MHz	880-960 MHz	
Gain	at Mid Tilt	13.5 dBi	13.9 dBi	14.4 dBi	
	Over All Tilts	13.4 ± 0.6 dBi	13.7 ± 0.6 dBi	14.2 ± 0.6 dBi	
Input Impedance		50Ω			
VSWR		< 1.5			
Return loss		> 14 dB			
Polarisation		±45°			
Horizontal Beamwidth (-3 dB)		72° ± 4.8°	69° ± 3.9°	67° ± 4.1°	
Vertical Beamwidth (-3 dB)		16.5° ± 1.5°	15.4° ± 1.1°	14.3° ± 0.8°	
Electrical Downtilt Range		2-16°			
Cross-Polar Isolation		> 25 dB			
Interband Isolation		> 35 dB			
First Upper Sidelobe Suppression		> 15 dB	> 15 dB	> 15 dB	
Front-to-Back Ratio (@ 180° ± 30°)		> 22 dB	> 23 dB	> 25 dB	
Maximum Average Power Per Port (at 50° C ambient temperature)		300 W			
Intermodulation 3rd Order, 2 x 43 dBm carrier		< -153 dBc			
Grounding		DC Ground			

Standard values based on NGMN-P-BASTA version 10.0 recommendation.



Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6886508NG

6-Band, 19-Port, 65°, XPOL, TDD Hybrid Panel Antenna, Variable Tilt, 1397 mm

ELECTRICAL CHARACTERISTICS		Y1, Y2				
Frequency Bands		1710-2690 MHz				
		1710-1880 MHz	1850-1990 MHz	1920-2170 MHz	2300-2400 MHz	2490-2690 MHz
Gain	at Mid Tilt	14.0 dBi	14.2 dBi	14.5 dBi	14.7 dBi	14.5 dBi
	Over All Tilts	13.8 ± 0.6 dBi	14.0 ± 0.5 dBi	14.3 ± 0.5 dBi	14.5 ± 0.5 dBi	14.3 ± 0.6 dBi
Input Impedance		50Ω				
VSWR		< 1.5				
Return loss		> 14 dB				
Polarisation		±45°				
Horizontal Beamwidth (-3 dB)		68° ± 4.9°	67° ± 4.7°	64° ± 5.1°	62° ± 5.5°	60° ± 5.2°
Vertical Beamwidth (-3 dB)		14.2° ± 1.0°	13.4° ± 0.8°	13° ± 0.8°	11.2° ± 0.9°	10.3° ± 0.9°
Electrical Downtilt Range		2-12°				
Cross-Polar Isolation		> 25 dB				
Interband Isolation		> 28 dB (Y1, Y2//Y3, Y4); > 35 dB (Y1, Y2//R1)				
First Upper Sidelobe Suppression		> 15 dB	> 15 dB	> 15 dB	> 15 dB	> 15 dB
Front-to-Back Ratio (@ 180° ± 30°)		> 23 dB	> 23 dB	> 24 dB	> 25 dB	> 25 dB
Maximum Average Power Per Port (at 50° C ambient temperature)		250 W				
Intermodulation 3rd Order, 2 x 43 dBm carrier		< -153 dBc				
Grounding		DC Ground				

Standard values based on NGMN-P-BASTA version 10.0 recommendation.

ELECTRICAL CHARACTERISTICS		Y3, Y4				
Frequency Bands		1710-2690 MHz				
		1710-1880 MHz	1850-1990 MHz	1920-2170 MHz	2300-2400 MHz	2490-2690 MHz
Gain	at Mid Tilt	14.0 dBi	14.2 dBi	14.5 dBi	14.8 dBi	14.7 dBi
	Over All Tilts	13.8 ± 0.6 dBi	14.0 ± 0.5 dBi	14.3 ± 0.5 dBi	14.6 ± 0.5 dBi	14.5 ± 0.6 dBi
Input Impedance		50Ω				
VSWR		< 1.5				
Return loss		> 14 dB				
Polarisation		±45°				
Horizontal Beamwidth (-3 dB)		67° ± 4.9°	65° ± 4.7°	63° ± 5.1°	59° ± 5.5°	59° ± 5.2°
Vertical Beamwidth (-3 dB)		15.1° ± 1.1	14.1° ± 0.8	13.2° ± 0.8°	11.5° ± 0.9°	10.4° ± 0.9°
Electrical Downtilt Range		2-12°				
Cross-Polar Isolation		> 25 dB				
Interband Isolation		> 28 dB (Y3, Y4//Y1, Y2); > 35 dB (Y3, Y4//R1)				
First Upper Sidelobe Suppression		> 15 dB	> 15 dB	> 15 dB	> 15 dB	> 15 dB
Front-to-Back Ratio (@ 180° ± 30°)		> 23 dB	> 23 dB	> 24 dB	> 25 dB	> 25 dB
Maximum Average Power Per Port (at 50° C ambient temperature)		250 W				
Intermodulation 3rd Order, 2 x 43 dBm carrier		< -153 dBc				
Grounding		DC Ground				

Standard values based on NGMN-P-BASTA version 10.0 recommendation.

Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6886508NG

6-Band, 19-Port, 65°, XPOL, TDD Hybrid Panel Antenna, Variable Tilt, 1397 mm

ELECTRICAL CHARACTERISTICS		P1
Frequency Bands		3300-3800 MHz
Input Impedance		50Ω
VSWR		< 1.5
Return loss		> 14 dB
Polarisation		±45°
Electrical Downtilt Range		2-12°
Single Column Width	Gain	13.5 dBi
	Horizontal Beamwidth (dB)	78°
	Vertical Beamwidth (3dB)	6.5°
	Cross-Polar Discrimination (0°)	≥ 16 dB
	First Upper Sidelobe Suppression	≥ 15 dB
	Front-to-Back Ratio	≥ 23 dB
65° Broadcast Beam	Gain (Typical)	15 dBi
	Horizontal Beamwidth (dB)	65°
	Vertical Beamwidth (dB)	6.5°
	Cross-Polar Discrimination (0°)	≥ 16 dB
	First Upper Sidelobe Suppression	≥ 15 dB
	Front-to-Back Ratio	≥ 23 dB
0° Direct Service Beam	Gain	19 dBi
	Horizontal Beamwidth (dB)	22°
	Vertical Beamwidth (3dB)	6.5°
	Cross-Polar Ratio	≥ 16 dB
	Azimuth Sidelobe Suppression (Typical)	≥ 12 dB
	Front-to-Back Ratio	≥ 23 dB
Calibration and Electrical Parameter	Coupling Factor Between Calibration and Each Antenna Port	-26 ± 2 dB
	Maximum Amp / Phase Deviation	1 dB/ 8°
	Maximum Power Per Port	40 W
Isolation	Co-Polar Isolation Between Ports	20 dB
	Cross-Polar Isolation Between Ports	25 dB
Intermodulation 3rd Order, 2 x 43 dBm carrier		< -143 dBc
Grounding		DC Ground



Standard values based on NGMN-P-BASTA version 10.0 recommendation.

Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6886508NG

6-Band, 19-Port, 65°, XPOL, TDD Hybrid Panel Antenna, Variable Tilt, 1397 mm

INTEGRATED RET PROPERTIES	
Protocol	Compliant with 3GPP/AISGv2.0
Power Supply	10-30VDC
Adjustment Time (Full Range)	≤ 90 sec (typical, depending on antenna type)
Power Consumption	< 2 W (Idle); < 10 W (In Motion)
Accuracy	≤ 0.5°
Hardware Interface	RS485 And Power
Safety Standard	Compliant to EN 60950/UL 60950 / RoHS, CE
Remote control	OMC, BTS / NodeB
Adjustment Cycles	> 20,000
Torque Max	≥ 160 mN.m
Protection Class	IP65
Housing Material / Color	Aluminum / Aluminium Silver
Mounting	Directly onto Antenna
Lightning Protection Rating	IEC 61000-4-5 Current Pulse Profile, 8/20 μs 10 Repetitions Min. @ 8 kA
Connectors	2 x 8 Pins Connector According To IEC60130-9 AND AISG Daisy Chain In : Male, Daisy Chain Out : Female Pin3:RS485+; Pin5:RS485-; Pin6:10~30V; Pin7:GND Female connector: 8 PINS, Male connector: 5 PINS

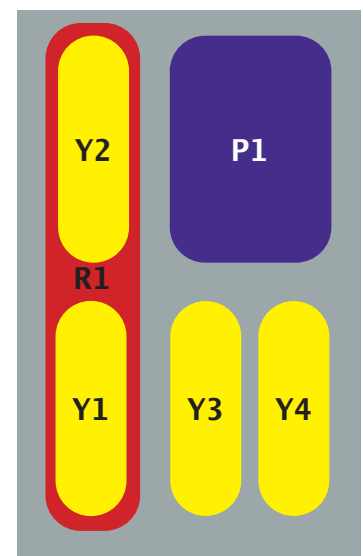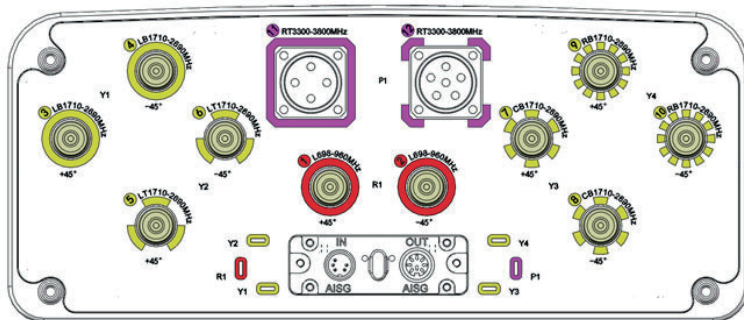

ARRAY LAYOUT	ARRAY	FREQUENCY	CONNECTOR	CONNECTOR TYPE
	R1	698-960	1-2	4.3-10 Female
	Y1	1710-2690	3-4	4.3-10 Female
	Y2	1710-2690	5-6	4.3-10 Female
	Y3	1710-2690	7-8	4.3-10 Female
	Y4	1710-2690	9-10	4.3-10 Female
P1	3300-3800	11-12	[MQ5 Male (4 RF + 1 Calibration) & MQ4 Male (4 RF)]	


Diagram shown at right depicts the view from the front of the antenna.
The illustration is not shown to scale.

Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6886508NG

6-Band, 19-Port, 65°, XPOL, TDD Hybrid Panel Antenna, Variable Tilt, 1397 mm

MECHANICAL CHARACTERISTICS		PACKAGING
Dimensions (Height x Width x Depth)	1397 x 397 x 157 mm (55.0 x 15.6 x 6.2 in)	Carton Box 1.597 x 0.492 x 0.277 m (62.9 x 19.4 x 10.9 in)
Weight (excluding mounting accessory)	27.5 kg (60.6 lbs)	
Weight with brackets	32 kg (70.5 lbs)	
Radome Material	Fiberglass	
Maximum Wind Speed	200 km/h (124.3 mph)	
Wind Load at 150 km/h	Frontal	515 N (115.8 lbf)
	Rear	575 N (129.3 lbf)
	Lateral	250 N (56.2 lbf)
Operating Temperature	-40° to +60° C (-40° to 140° F)	
MOUNTING KIT OPTIONS	POLE DIAMETER	MECHANICAL TILT
All mounting bracket kits are ordered separately unless otherwise indicated.		
Mounting and Downtilt Bracket Kit (Included)	Ø50-Ø125 mm (Ø2.0-Ø4.9 mm)	0-20°

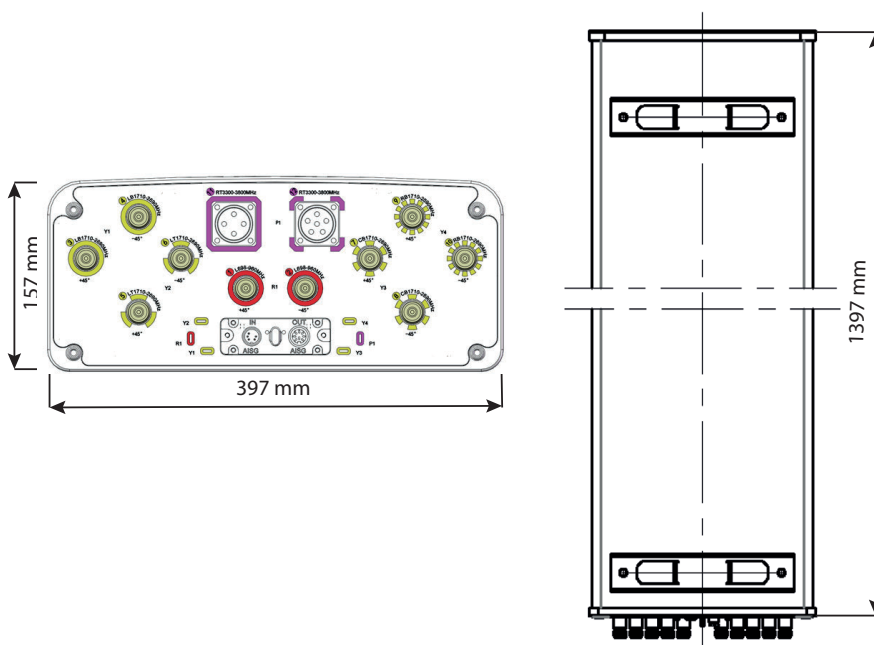

Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.