

**6888370-3**

6888370N-3 6888370-3G 6888370NG-3

5-Band, 30-Port, 65°, XPOL, Tri-Sector Antenna, Variable Tilt, 2325 mm



- Penta band, tri-sector antenna, 30 connectors
- Independent tilt on each band 2-10° / 2-10° / 0-10° / 0-10° / 0-10°
- Independent azimuth panning ±15° on each sector
- MET and RET versions, 3GPP/AISG2.0
- Our patented, RET module controlling all tilt angles, fully inserted inside the antenna (field replaceable)

<b>PRODUCT OVERVIEW</b>	Frequency Range (MHz)	698-788	880-960	1695-2180	1695-2690	2490-2690
	Array	<span style="color: red;">■</span> R1	<span style="color: red;">■</span> R2	<span style="color: blue;">■</span> B1	<span style="color: yellow;">■</span> Y1	<span style="color: yellow;">■</span> Y2
	Connector	1-2	3-4	5-6	7-8	9-10
	Polarization	XPOL	XPOL	XPOL	XPOL	XPOL
	Azimuth Beamwidth (avg)	65°	65°	65°	65°	65°
	Electrical Downtilt	2-10°	2-10°	0-10°	0-10°	0-10°
	Dimensions	2325 x Ø573 mm				



**ORDERING OPTIONS** Select from the different options listed below

SELECT ELECTRICAL DOWNTILT CONTROL & AISG PROTOCOL	SELECT ACTUATOR	CONNECTOR TYPE	SELECT NUMBER OF SECTORS	ANTENNA MODEL NUMBER
Manual Electrical Tilt (MET)	---	4.3-10 Female	Three Sectors	6888370N-3
			Two Sectors	6888370N-2
			One Sector	6888370N-1
		7/16-DIN Female	Three Sectors	6888370-3
			Two Sectors	6888370-2
			One Sector	6888370-1
Remote Electrical Tilt (RET) AISG v2.0 / 3GPP	Multi-Device Control Unit (MDCU)	4.3-10 Female	Three Sectors	6888370NG-3
			Two Sectors	6888370NG-2
			One Sector	6888370NG-1
		7/16-DIN Female	Three Sectors	6888370-3G
			Two Sectors	6888370-2G
			One Sector	6888370-1G



Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6888370-3

6888370N-3 6888370-3G 6888370NG-3

5-Band, 30-Port, 65°, XPOL, Tri-Sector Antenna, Variable Tilt, 2325 mm

**ELECTRICAL SPECIFICATIONS** Ultra Low Band

■ R1

Frequency Range	MHz	698-788	
Polarization	---	±45°	
Gain	Min Tilt	dBi	14.8
	Mid Tilt	dBi	14.8
	Max Tilt	dBi	14.5
Azimuth Beamwidth	degrees	73°	
Elevation Beamwidth	degrees	12°	
Electrical Downtilt	degrees	2°-10°	
Impedance	Ohms	50	
VSWR	---	< 1.5	
Passive Intermodulation 3rd Order for 2 x 20W Carriers	dBm	< -110	
Front-to-Back Ratio, Total Power, ±30°	dB	> 25	
Upper Sidelobe Suppression, 0° to 20°	dB	18 typical	
Maximum Effective Power Per Port	Watts	250 W	
Inter/Intra Band Isolation	dB	> 25	

**ELECTRICAL SPECIFICATIONS** Ultra Low Band

■ R2

Frequency Range	MHz	880-960	
Polarization	---	±45°	
Gain	Min Tilt	dBi	16.0
	Mid Tilt	dBi	15.9
	Max Tilt	dBi	15.6
Azimuth Beamwidth	degrees	67°	
Elevation Beamwidth	degrees	9.4°	
Electrical Downtilt	degrees	2°-10°	
Impedance	Ohms	50	
VSWR	---	< 1.5	
Passive Intermodulation 3rd Order for 2 x 20W Carriers	dBm	< -110	
Front-to-Back Ratio, Total Power, ±30°	dB	> 25	
Upper Sidelobe Suppression, 0° to 20°	dB	18 typical	
Maximum Effective Power Per Port	Watts	250 W	
Inter/Intra Band Isolation	dB	> 25	

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 6888370-3

6888370N-3 6888370-3G 6888370NG-3

5-Band, 30-Port, 65°, XPOL, Tri-Sector Antenna, Variable Tilt, 2325 mm

### ELECTRICAL SPECIFICATIONS Filtered Array (Y2)

**B1**

Frequency Range		MHz	1695-2180	
		MHz	1800	2100
Polarization		---	±45°	
Gain	Min Tilt	dBi	17.2	17.5
	Mid Tilt	dBi	17.2	17.4
	Max Tilt	dBi	17.1	17.3
Azimuth Beamwidth		degrees	69°	67°
Elevation Beamwidth		degrees	6.0°	5.1°
Electrical Downtilt		degrees	0°-10°	
Impedance		Ohms	50	
VSWR		---	< 1.5	
Passive Intermodulation 3rd Order for 2 x 20W Carriers		dBm	< -110	
Front-to-Back Ratio, Total Power, ±30°		dB	> 25	
Upper Sidelobe Suppression, 0° to 20°		dB	18 typical	
Maximum Effective Power Per Port		Watts	200 W	
Inter/Intra Band Isolation		dB	> 25	

### ELECTRICAL SPECIFICATIONS Ultra Wide Band

**Y1**

Frequency Range		MHz	1695-2690		
		MHz	1800	2100	2600
Polarization		---	±45°		
Gain	Min Tilt	dBi	17.5	17.7	17.9
	Mid Tilt	dBi	17.5	17.7	17.8
	Max Tilt	dBi	17.4	17.6	17.5
Azimuth Beamwidth		degrees	68°	70°	72°
Elevation Beamwidth		degrees	6.1°	5.3°	4.2°
Electrical Downtilt		degrees	0°-10°		
Impedance		Ohms	50		
VSWR		---	< 1.5		
Passive Intermodulation 3rd Order for 2 x 20W Carriers		dBm	< -110		
Front-to-Back Ratio, Total Power, ±30°		dB	> 25		
Upper Sidelobe Suppression, 0° to 20°		dB	18 typical		
Maximum Effective Power Per Port		Watts	200 W		
Inter/Intra Band Isolation		dB	> 25		

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 6888370-3

6888370N-3 6888370-3G 6888370NG-3

5-Band, 30-Port, 65°, XPOL, Tri-Sector Antenna, Variable Tilt, 2325 mm

### ELECTRICAL SPECIFICATIONS Filtered Array (B1)

■ Y2

Frequency Range	MHz	2490-2690	
Polarization	---	±45°	
Gain	Min Tilt	dBi	17.6
	Mid Tilt	dBi	17.5
	Max Tilt	dBi	17.2
Azimuth Beamwidth	degrees	61°	
Elevation Beamwidth	degrees	4.1°	
Electrical Downtilt	degrees	0°-10°	
Impedance	Ohms	50	
VSWR	---	< 1.5	
Passive Intermodulation 3rd Order for 2 x 20W Carriers	dBm	< -110	
Front-to-Back Ratio, Total Power, ±30°	dB	> 25	
Upper Sidelobe Suppression, 0° to 20°	dB	18 typical	
Maximum Effective Power Per Port	Watts	200 W	
Inter/Intra Band Isolation	dB	> 25	

6888370-3

6888370N-3 6888370-3G 6888370NG-3

5-Band, 30-Port, 65°, XPOL, Tri-Sector Antenna, Variable Tilt, 2325 mm

## ELECTRICAL DOWNTILT CONTROL

For multiband antennas, electrical downtilt for each band can be controlled separately. Tilt indicator(s) are covered by removable transparent cap(s).

Manual Electrical Tilt (MET) Control	A colored knob at the end of the tilt indicator allows change of the tilt without need of a tool. The knob color is identical to the corresponding connector color. To access the knob, remove the cap by turning it counter-clockwise. It is re-installed by opposite rotation. <b>Do not remove the transparent cap(s) from the antenna.</b>
Remote Electrical Tilt (RET) Control	The remote control of the electrical tilt is managed by a Multi-Device Control Unit (MDCU) or a Multi-Device Dual Unit (MDDU) inserted in the bottom of the antenna. <i>See details below and refer to the ordering options to see which actuators are available with this particular antenna.</i> A single actuator individually controls the tilt of each band (no need for daisy chain cables between the bands). This module does not add any additional length to the antenna. For RET control, the transparent caps must be in place and locked. The tilt angle indicators always remain visible and the antenna still has manual tilt control (manual override). <b>Do not remove the transparent cap(s) from the antenna.</b>

## RET ACTUATOR

Amphenol's **RET-READY** antennas are delivered with the RET Actuator already installed and pre-commissioned with all antenna parameters. Every RET device is factory configured and calibrated so the antenna is ready to be used once delivered to the site which means that there is no need for further installation of RET devices or for programming their configuration or for running a calibration process.

RET-READY ACTUATORS	<b>Multi-Device Control Unit (MDCU).</b> The MDCU is an electronic module that allows the remote control of the electrical downtilt (RET) in Amphenol antennas with factory embedded motors. The MDCU is factory installed. <i>Refer to the ORDERING OPTIONS for availability with this model</i>	
	<b>Multi-Device Dual Unit (MDDU).</b> The MDDU allows two separate RET Controllers to independently drive the RETs in antennas with factory embedded motors (for antenna sharing or two technologies). The MDDU is factory installed. <i>Refer to the ORDERING OPTIONS for availability with this model.</i>	
Number of RET-READY Actuators	One per antenna	
Input Voltage	+10 to +30 V	
Power Consumption	Idle State	0.5 W
	Operating	4 W typical / 10 W maximum
Protocol	3GPP/AISG 2.0	
Tilt Change Duration	Less than 15 seconds, typical (may vary dependent on antenna type and outdoor temperature)	
Precision	±0.5°	
Tilt Change Capability	50,000 minimum	
RET Interface	1 pair of AISG Male and Female (type IEC60130-9)	
Field Replaceable Unit	Yes	


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6888370-3

6888370N-3 6888370-3G 6888370NG-3

5-Band, 30-Port, 65°, XPOL, Tri-Sector Antenna, Variable Tilt, 2325 mm

NO  
IMAGE  
AVAILABLE  
  
COMING  
SOON

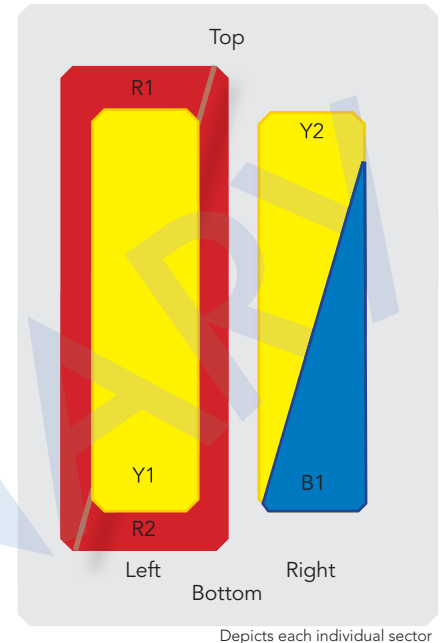

ARRAY LAYOUT	ARRAY	FREQUENCY	CONNECTOR	CONNECTOR TYPE
	R1	698-788	1-2	4.3-10 Female or 7/16-DIN Female Long Neck
	R2	880-960	3-4	4.3-10 Female or 7/16-DIN Female Long Neck
	B1	1695-2180	5-6	4.3-10 Female or 7/16-DIN Female Ultra Long Neck
	Y1	1695-2690	7-8	4.3-10 Female or 7/16-DIN Female Ultra Long Neck
	Y2	2490-2690	9-10	4.3-10 Female or 7/16-DIN Female Long Neck

Diagram shown at right depicts the view from the front of the antenna. The illustration is not shown to scale.

### MECHANICAL SPECIFICATIONS

The 6888370-3 is a Tri-Sector system that contains three Penta Band antennas installed at 120° in a cylindrical shroud with ±15° azimuth panning capability independent on each sector. A service area at the bottom can be opened for access to connectors and the manual adjustment of the electrical downtilt and azimuth panning. Variants can be delivered with only one or two sectors fitted.

Length (including Service Area)	mm (in)	2325 (91.5)
Service Area Length	mm (in)	394 (15.5)
Diameter	mm (in)	573 (22.6)
Net Weight	Three Sectors	kg (lbs) 166 (366.0)
	Two Sectors	kg (lbs) 141 (310.9)
	One Sector	kg (lbs) 116 (255.7)
Windload (Wind Tunnel Coefficients)	Calculation	km/h (mph) 160 (99.4)
	Frontal	N (lbf) 790 (177.6)
Operational Wind Speed	km/h (mph)	160 (99.4)
Survival Wind Speed	km/h (mph)	200 (124)
Radome Color	---	Gray RAL7035
Radome Material	---	Outdoor Plastic
Lightning Protection	---	Direct Ground
SHIPPING	Shipping Dimensions (Length x Width x Depth)	mm (in) 2550 x 760 x 820 (100.4 x 29.9 x 32.3)
	Shipping Weight	kg (lbs) TBD
	Shipping Volume	m <sup>3</sup> (ft <sup>3</sup> ) 1.59 (56.2)

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6888370-3


6888370N-3 6888370-3G 6888370NG-3

5-Band, 30-Port, 65°, XPOL, Tri-Sector Antenna, Variable Tilt, 2325 mm


**ENVIRONMENTAL SPECIFICATIONS**

Environmental	---	ETS 300 019
Operating Temperature	° C (° F)	-40° to +60° (-40° to +140°)
Product Environmental Compliance	---	Product is RoHs Compliant


Mounting Flange Interface

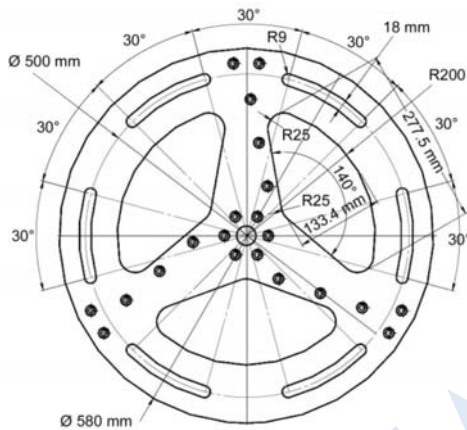

Dimensions

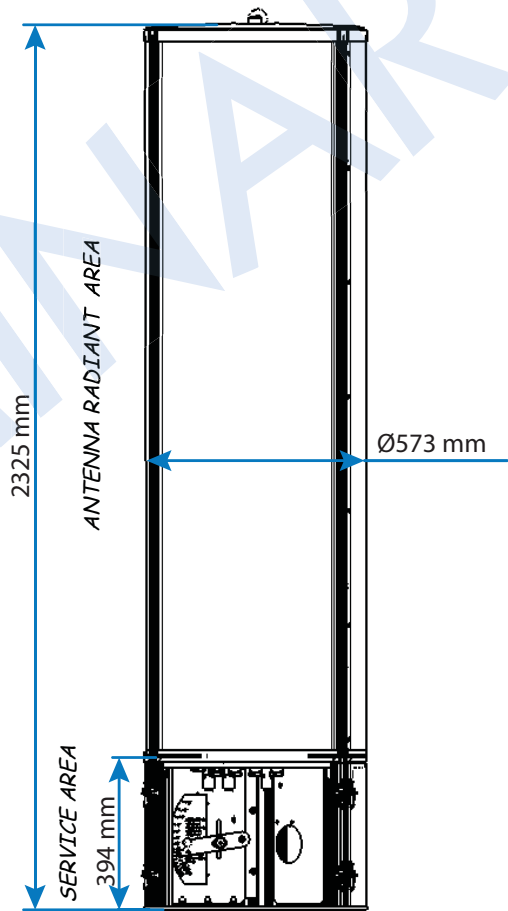

Service Area (Opened Shroud)

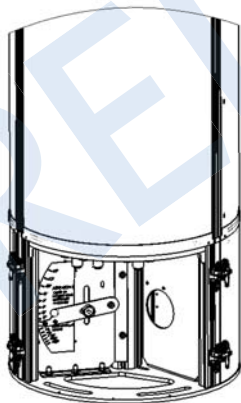

**TRIO EXTENSION**

A TRIO Extension is a short mounting (0.85 m) mast which has the same diameter (573 mm), same outside material, and same colour as the antenna. The two major advantages of the extensions are getting the antenna higher, and housing our TMA.

Dimensions (Height x Diameter)	mm (in)	850 x Ø573 (33.5 x Ø22.6)
Weight	kg (lbs)	66 (145.5)
Shroud Color	---	Gray RAL7035
Shroud Material	---	Outdoor Plastic
Flange	---	Galvanised Steel
Wind Speed	Operational	km/h (mph) 160 (99.4)
	Survival	km/h (mph) 200 (124)



Refer to the separate documentation on TRIO extensions for more details

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.