

## A-020VMHyyzz-CC

20W Attenuator | Variable Attenuation


Electrical Characteristics	
Frequency Range	700-2700 MHz
VSWR	< 1.4
Power	20 W
Attenuation Value	20-50 dB (variable)
Accuracy	< 3.5 dB
Insertion Loss	< 3.5 dB
Impedance	50Ω

### Ordering Options

When ordering, select the Attenuation Value (xx), then select the Connector Type (yyzz).

Connector Type (yyzz)	
N Male to N Female	N Male to N Male
A-020VMHNMNF-CC	A-020VMHNMNM-CC

### Dimensional Drawings

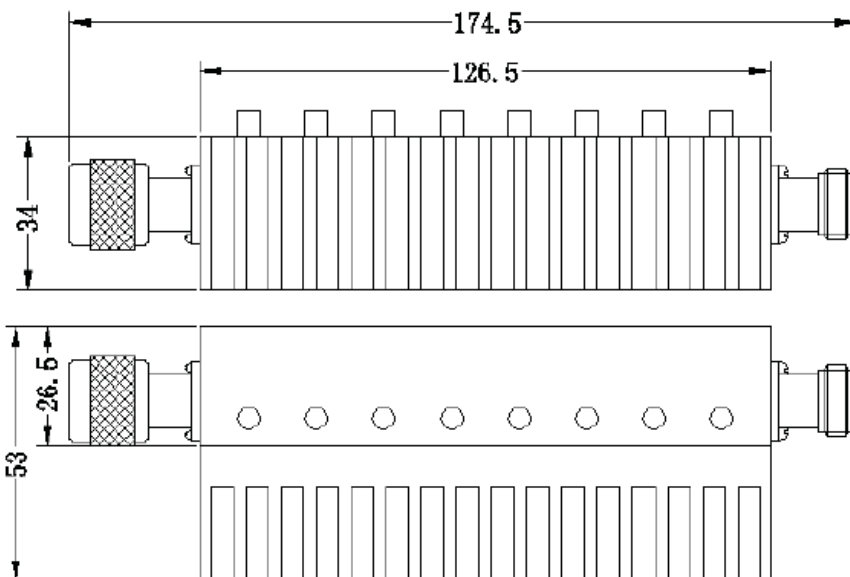

A-020VMHNMNF-CC

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.