

A-030xxMXyyzz-CC

30W Attenuator | Indoor / Outdoor Use



Electrical Characteristics					
Frequency Range	698-2700 MHz				
VSWR	≤ 1.25				
Power	30 W				
Attenuation Value (xx)	3 dB	6 dB	10 dB	20 dB	30 dB
Accuracy	±0.5 dB	±0.5 dB	±0.6 dB	±0.6 dB	±1.2 dB
PIM	≤ -160 dBc				
Impedance	50Ω				
Mechanical Characteristics					
Weight	4.9 kg				
Connector Type (yyzz)	See Ordering Options Below				
Environmental Characteristics					
Application	Indoor / Outdoor				
Operating Temperature	-30° C to +60° C				

Ordering Options

When ordering, select the Attenuation Value (xx), then select the Connector Type (yyzz).

Attenuation Value	Connector Type (yyzz)	
	4.3-10 Female to 4.3-10 Female (4F4F)	N Female to N Female (NFNF)
3 dB (03)	A-03003MX4F4F-CC	A-03003MXNFNF-CC
6 dB (06)	A-03006MX4F4F-CC	A-03006MXNFNF-CC
10 dB (10)	A-03010MX4F4F-CC	A-03010MXNFNF-CC
20 dB (20)	A-03020MX4F4F-CC	A-03020MXNFNF-CC
30 dB (30)	A-03030MX4F4F-CC	A-03030MXNFNF-CC


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

A-030xxMXyyzz-CC

30W Attenuator | Indoor / Outdoor Use

Dimensional Drawings

A-030xxMXyyzz-CC

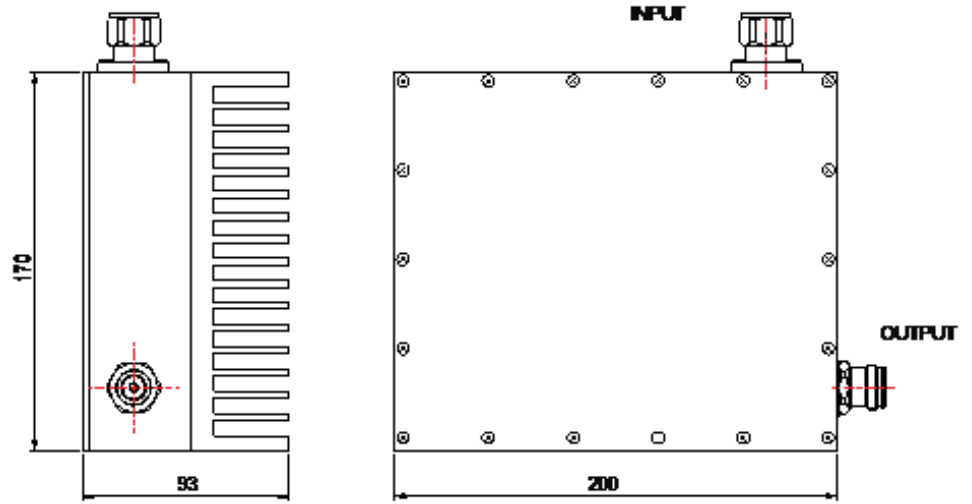

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.