



APS-xx-WBM-XP-DF-CC

Power Splitter | 7/16-DIN Female | Square Body


Ordering Options		2-Way Splitter	3-Way Splitter
Model Number (xx)		APS-02-WBM-XP-DF-CC	APS-03-WBM-XP-DF-CC
			
Electrical Characteristics			
Frequency Range		698-2700 MHz	698-2700 MHz
VSWR		≤ 1.20	≤ 1.25
Power Rating		700 W	700 W
PIM3 (2x43 dBm)		≤ -160 dBc	≤ -160 dBc
Insertion Loss		< 0.2 dB	< 0.3 dB
Split Loss		3 dB	4.8 dB
Peak Power (max)		3 kW	3 kW
Impedance		50Ω	50Ω
Mechanical Characteristics			
Plating	Inner Contact	Silver	Silver
	Outer Trimetal	Trimetal	Trimetal
Connector		7/16-DIN Female	7/16-DIN Female
Environmental Characteristics			
Operating Temperature		-30° C to +75° C	-30° C to +75° C
Relative Humidity		Up to 95%	Up to 95%
RoHS Compliant		yes	yes
Application		Indoor / Outdoor	Indoor / Outdoor
Environmental		IP65	IP65

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

APS-xx-WBM-XP-DF-CC

Power Splitter | 7/16-DIN Female | Square Body

APS-02-WBM-XP-DF-CC

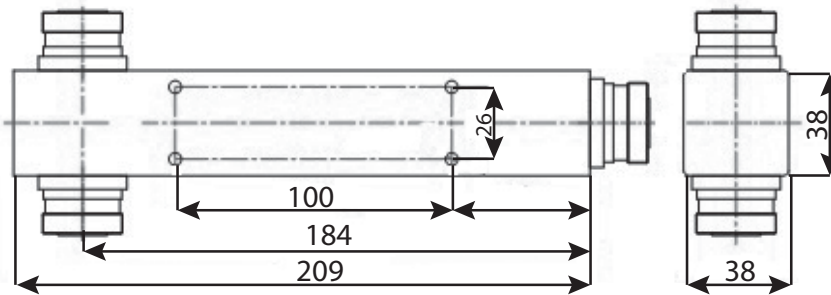

APS-03-WBM-XP-DF-CC

