

## CUX063X19x00

Dual Band | Panel Antenna | XX-Pol | 73° / 65° | 14.6 / 18.0 dBi | Variable Tilt

- Dual band, XX-Pol, variable tilt, panel antenna
- Part of Amphenol's UNIVERSAL series of antennas featuring consistent form factors for future-proofing
- Patented internal RET actuator adds no additional length to the antenna
- Features an adjustable mounting bracket channel for custom mounting in any situation






Ordering Options		Model Number					
When ordering, replace "x" in the model number with one of the options listed below.							
Manual Electrical Tilt		CUX063X19M00					
Remote Electrical Tilt AISG v1.1		CUX063X19R00					
Remote Electrical Tilt AISG v2.0 / 3GPP		CUX063X19G00					
Mounting bracket kits and other accessories are ordered separately.							
Electrical Characteristics		696-960 MHz		1695-2400 MHz			
Frequency Bands (MHz)		696-806	806-960	1695-1880	1850-1990	1900-2170	2200-2400
Polarization		±45°		±45°			
Horizontal Beamwidth		73°	72°	65°	63°	66°	62°
Vertical Beamwidth		11°	9.5°	6.0°	5.5°	5.0°	4.8°
Gain		14.0 dBi	14.6 dBi	17.0 dBi	17.5 dBi	17.5 dBi	18.0 dBi
Electrical Downtilt		0-12°		0-10°			
Impedance		50Ω		50Ω			
VSWR		< 1.5:1		< 1.5:1			
Upper Sidelobe Suppression		< -17 dB Typical		< -18 dB Typical			
Front-to-Back Ratio		> 30 dB		> 25 dB			
In-Band Isolation		> 23 dB		> 25 dB			
Isolation Between Ports		> 30 dB		> 30 dB			
IM3 (2x20W carrier)		< -153 dBc		< -153 dBc			
Input Power		500 W		250 W			
Total Number of Connectors		Antennas has 4 connectors located at the bottom					
Connectors Per Band, Type, Location	696-960 MHz	2 Connectors / 7/16-DIN Female / Bottom					
	1695-2400 MHz	2 Connectors / 7/16-DIN Female / Bottom					
Diplexed		No					
Lightning Protection		Direct Ground					
Operating Temperature		-40° to +60° C (-40° to +140° F)					
Mechanical Characteristics		696-960 MHz			1695-2400 MHz		
Dimensions (Length x Width x Depth)		1906 x 307.3 x 177.2 mm			75.0 x 12.1 x 7.0 in		
Weight without Mounting Brackets: MET		15.0 kg			33.0 lbs		
Weight without Mounting Brackets: RET		15.3 kg			33.7 lbs		
Survival Wind Speed		241 km/hr			150 mph		
Wind Loads (160 km/hr or 100 mph)	Front	707 N			159 lbf		
	Side	419 N			94 lbf		

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

# CUX063X19x00

Dual Band | Panel Antenna | XX-Pol | 73° / 65° | 14.6 / 18.0 dBi | Variable Tilt


Electrical Downtilt Control				
Electrical downtilt for each band can be controlled separately. Tilt indicator(s) are covered by removable transparent cap(s).				
Manual Electrical Tilt (MET) Control	A colored knob at the end of the tilt indicator allows change of the tilt without need of a tool. The knob color is identical to the corresponding connector ring color. To access the knob, remove the cap by turning it counter-clockwise. It is re-installed by opposite rotation. Do not remove the transparent cap(s) from the antenna.			
Remote Electrical Tilt (RET) Control	The remote control of the electrical tilt is managed by a module (MDCU) totally inserted at the bottom of the antenna. One single module controls individually the tilt of each band (no need of daisy chain cables between the bands). This module does not add any additional length at the bottom of the antenna. For RET control, the transparent cap must be in place and locked. The tilt angle indicator always remains visible and the antenna still has manual tilt control (manual override).			
RET Module	The RET module is factory installed and does not need to be ordered separately.			
	Part Number for AISG v1.1 protocol:	MDCU-A0000	One unit installed in CUX063X19R00	
	Part Number for 3GPP/AISG v2.0 protocol:	MDCU-G0000	One unit installed in CUX063X19G00	
Important Installation Instructions		In order to operate RET control, the transparent caps covering the tilt adjustment indicators must be engaged and locked. Do not cut them from the antenna.		
		Do not install the antenna with the connectors facing upward.		
Mounting Options	Part Number	Image	Fits Pipe Diameter	Weight
All mounting bracket kits are ordered separately unless otherwise indicated. Select from the options listed below.				
3-Point Mounting Bracket Kit	MKS09P02		50-115 mm 2.0-4.5 in	4.1 kg 9 lbs
3-Point Mounting & Downtilt Bracket Kit	MKS09T02		50-115 mm 2.0-4.5 in	6.4 kg 14 lbs

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

CUX063X19x00

Dual Band | Panel Antenna | XX-Pol | 73° / 65° | 14.6 / 18.0 dBi | Variable Tilt

Bottom View of Antenna

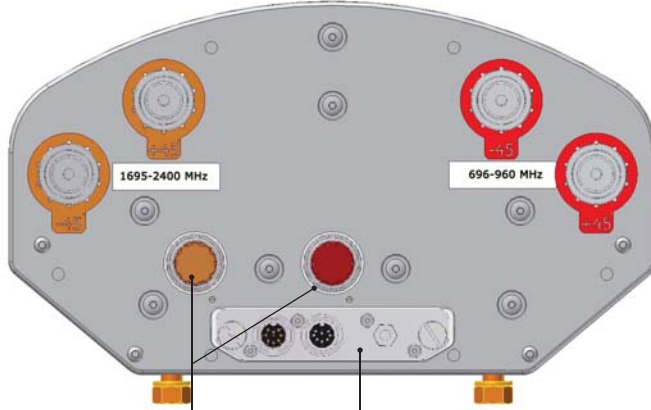


Location of the MDCU for RET Control

Tilt indicators covered by transparent caps. Manual adjustment is accessed by removing the caps. Knob colors are the same as the connectors.



In order to operate RET control, the transparent caps covering the tilt adjustment indicators must be engaged and locked. Do not cut them from the antenna.

Dimensions

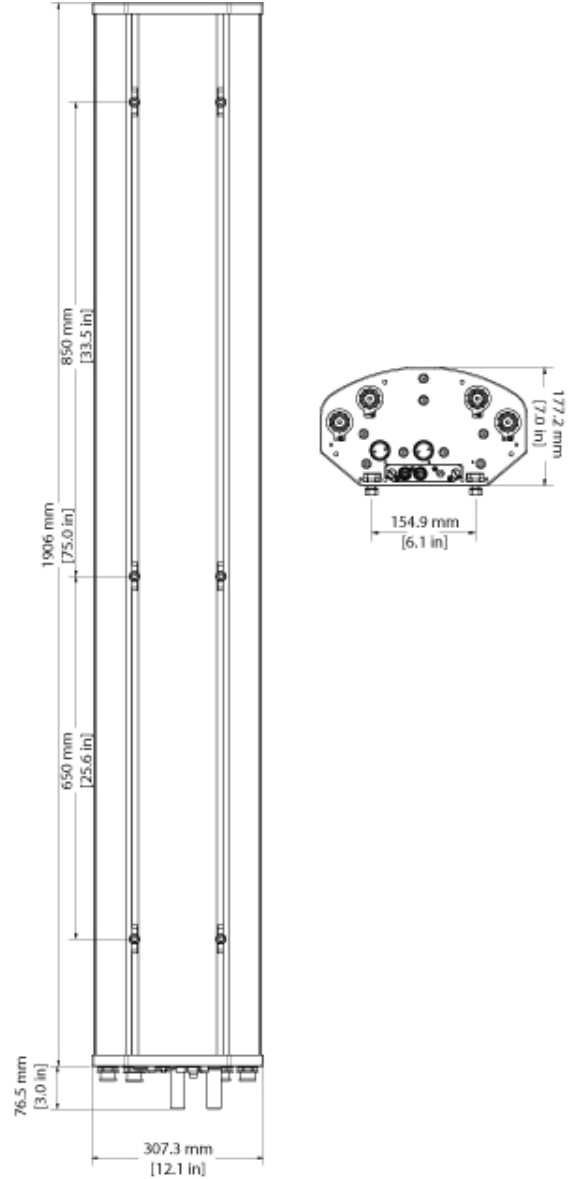


Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

**CUX063X19x00**

Dual Band | Panel Antenna | XX-Pol | 73° / 65° | 14.6 / 18.0 dBi | Variable Tilt

696-960 MHz

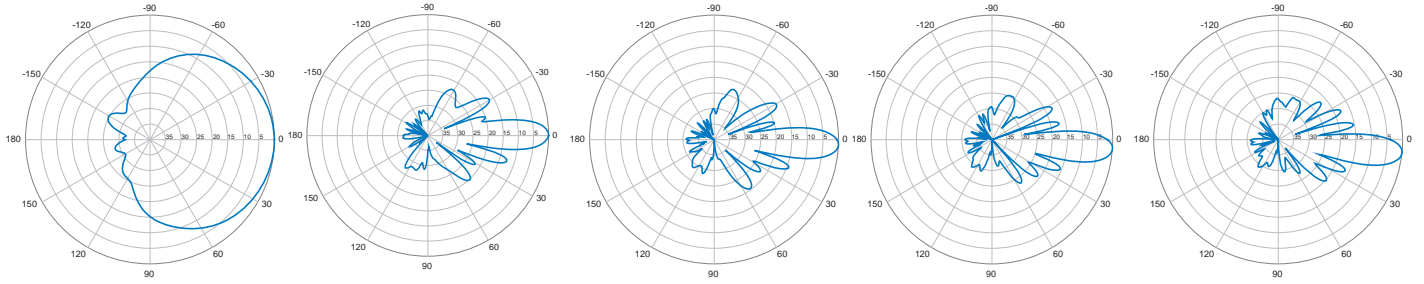


Horizontal | 750 MHz

0° | Vertical | 750 MHz

2° | Vertical | 750 MHz

4° | Vertical | 750 MHz

6° | Vertical | 750 MHz

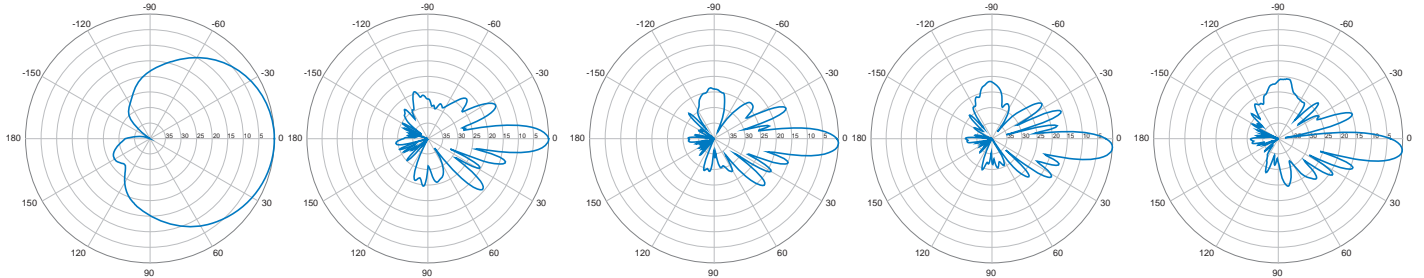


Horizontal | 850 MHz

0° | Vertical | 850 MHz

2° | Vertical | 850 MHz

4° | Vertical | 850 MHz


6° | Vertical | 850 MHz

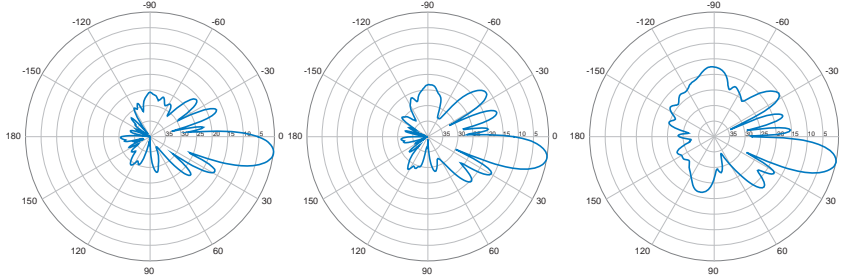

8° | Vertical | 750 MHz

10° | Vertical | 750 MHz

12° | Vertical | 750 MHz

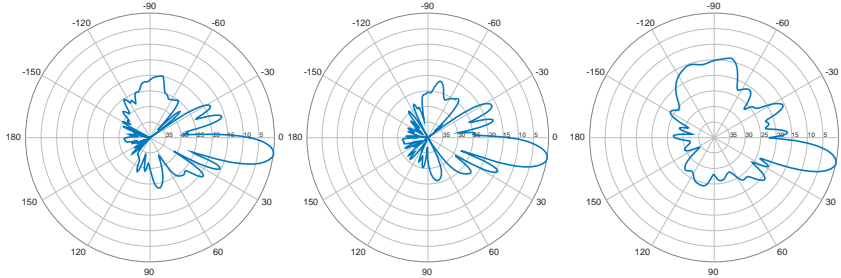

8° | Vertical | 850 MHz

10° | Vertical | 850 MHz


12° | Vertical | 850 MHz

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

CUX063X19x00

Dual Band | Panel Antenna | XX-Pol | 73° / 65° | 14.6 / 18.0 dBi | Variable Tilt

1695-2400 MHz

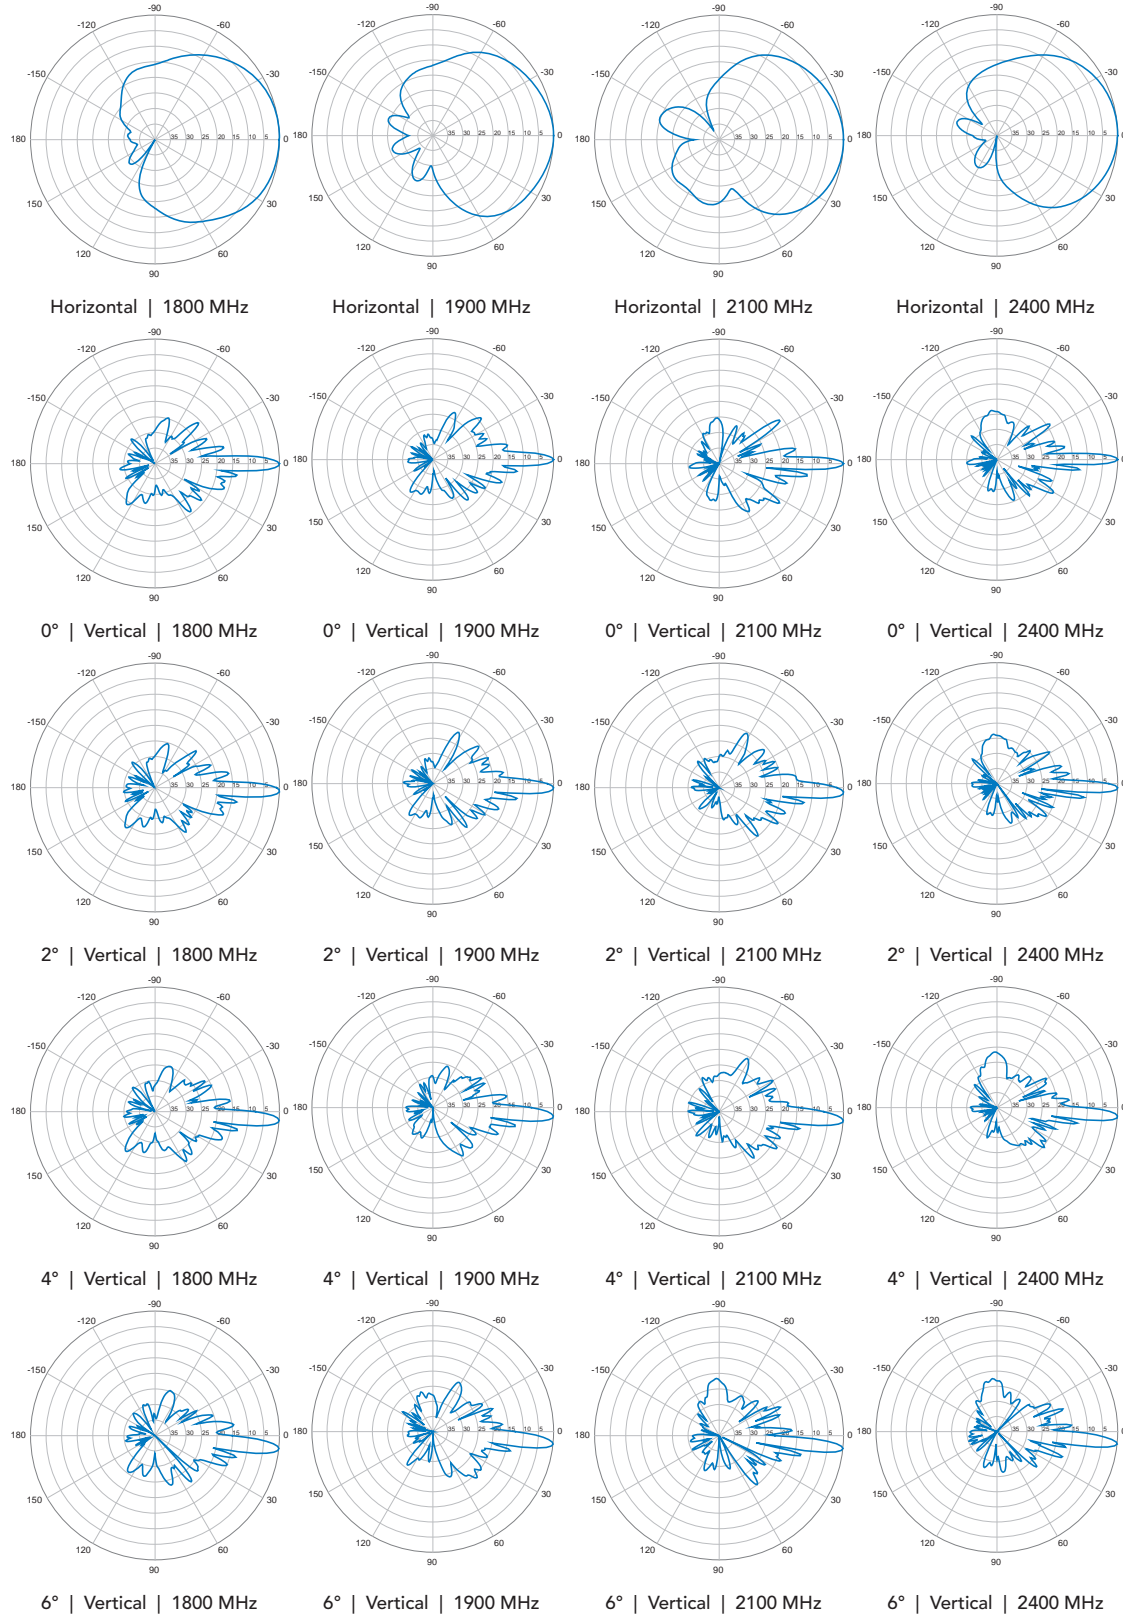


Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

CUX063X19x00

Dual Band | Panel Antenna | XX-Pol | 73° / 65° | 14.6 / 18.0 dBi | Variable Tilt

1695-2400 MHz

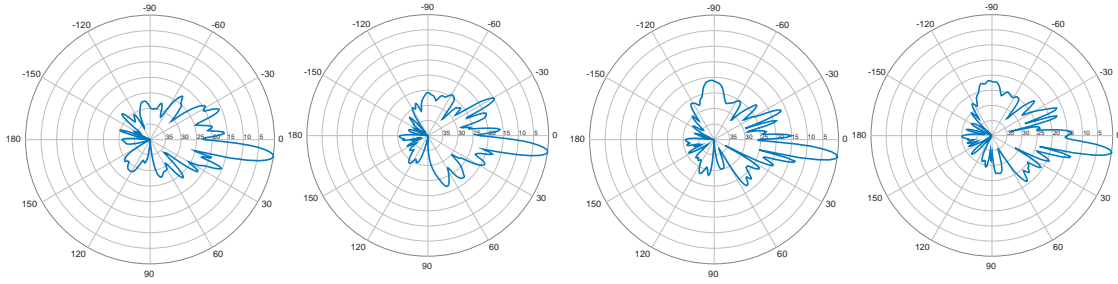


8° | Vertical | 1800 MHz

8° | Vertical | 1900 MHz

8° | Vertical | 2100 MHz

8° | Vertical | 2400 MHz

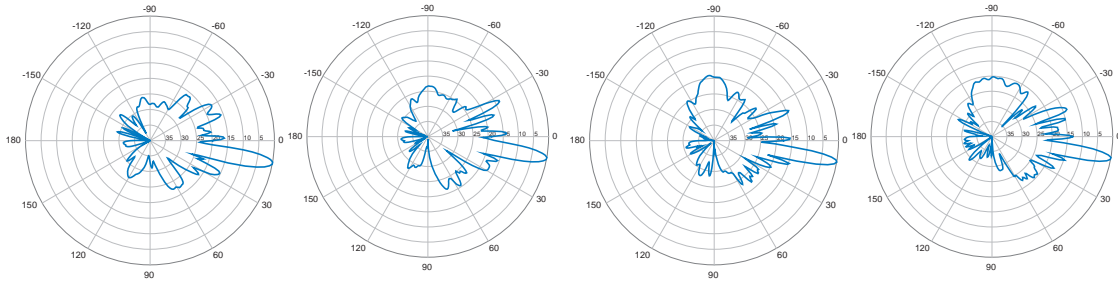

10° | Vertical | 1800 MHz

10° | Vertical | 1900 MHz

10° | Vertical | 2100 MHz

10° | Vertical | 2400 MHz

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.