


This model was previously released as AHC-03-LL-22-NF-CC.

HC-3LL22-NF-CC

3 dB Hybrid Coupler | 380-2700 MHz | 2 in 2 out | N Female | Indoor / Outdoor



Electrical Characteristics	
Frequency Range	380-2700 MHz
Split Ratio	3.0 dB
Insertion Loss	$\leq 3 \pm 1$ dB
Isolation	≥ 25 dB
PIM3 (2x43dBm)	< -153 dBc
VSWR	≤ 1.25
Peak Power	1.5 kW
Power Rating	200 W
Impedance	50 Ω
Mechanical Characteristics	
Connectors	N Female
Environmental Characteristics	
Operating Temperature	-30° C to +70° C
Application	Indoor / Outdoor
Environmental	IP67
Mounting Characteristics	
Wall Mount	

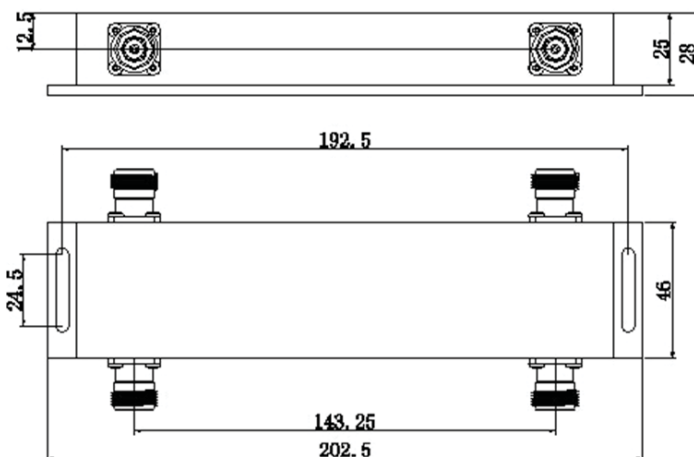

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.