


This model was previously released as AHC-03-MN-22-NF-CC.

HC-3MN22-NF-CC

3 dB Hybrid Coupler | 698-2700 MHz | 2 in 2 out | N Female | Indoor

Electrical Characteristics	
Frequency Range	698-2700 MHz
Split Ratio	3.05 dB
Insertion Loss	≤ 0.55 dB
Isolation	≥ 23 dB
PIM3 (2x43dBm)	< -150 dBc
VSWR	≤ 1.25
Power Rating	200 W
Impedance	50Ω
Mechanical Characteristics	
Material	Aluminum
Connectors	N Female
Dimensions	146 x 77 x 20 mm
Weight	0.26 kg
Environmental Characteristics	
Operating Temperature	-30° C to +55° C
Application	Indoor
Environmental	IP65
Mounting Characteristics	
Wall Mount	

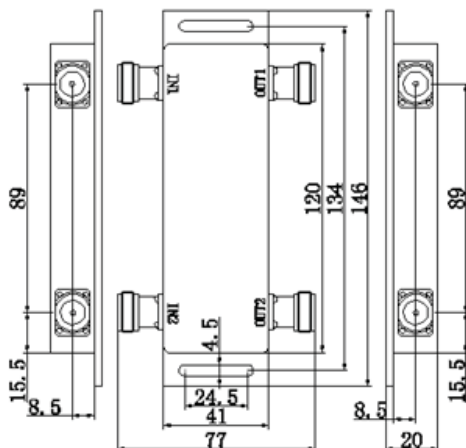

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.