

## L-010MXxx-CC

This model was previously released as AL-010-ML-xx-CC

### 10W Termination Loads | Indoor Use

- Absorbs RF and microwave energy
- Available with a variety of connector options




Ordering Options					
Model Number	L-010MX43M-CC	L-010MXDF-CC	L-010MXDM-CC	L-010MXNF-CC	L-010MXNM-CC
<b>Electrical Characteristics</b>					
Frequency Range	650-3000 MHz	698-2700 MHz	698-2700 MHz	698-2700 MHz	698-2700 MHz
VSWR	≤ 1.15	≤ 1.20	≤ 1.20	≤ 1.20	≤ 1.20
Power	10 W	10 W	10 W	10 W	10 W
Intermodulation (2x43 dBm; typical)	≤ -160 dBc	≤ -160 dBc	≤ -160 dBc	≤ -160 dBc	≤ -160 dBc
Impedance	50Ω	50Ω	50Ω	50Ω	50Ω
<b>Mechanical Characteristics</b>					
Dimensions (Length x Diameter)	198.8 x Ø36 mm	204.4 x Ø36 mm	210.3 x Ø36 mm	195 x Ø36 mm	195 x Ø36 mm
Connector Type (xx)	4.3/10 DIN Male (43M)	7/16-DIN Female (DF)	7/16-DIN Male (DM)	N Female (NF)	N Male (NM)
<b>Environmental Characteristics</b>					
Operating Temperature	-35° C to +50° C	-33° C to +50° C	-33° C to +50° C	-33° C to +50° C	-33° C to +50° C
Application	Indoor	Indoor	Indoor	Indoor	Indoor

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


## L-010MXxx-CC

10W Termination Loads | Indoor Use


L-010MX43M-CC

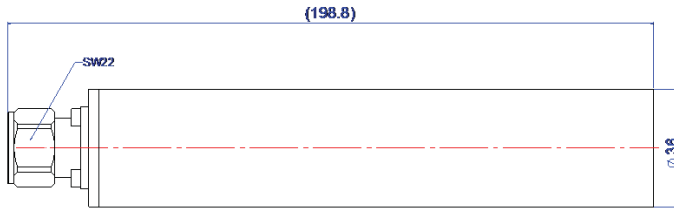


L-010MXDF-CC

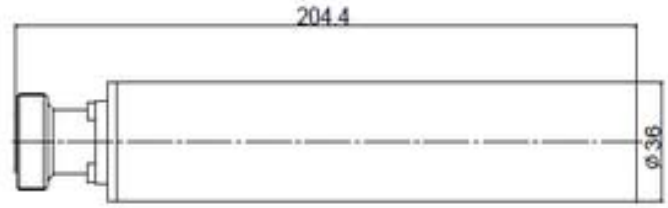


L-010MXDM-CC

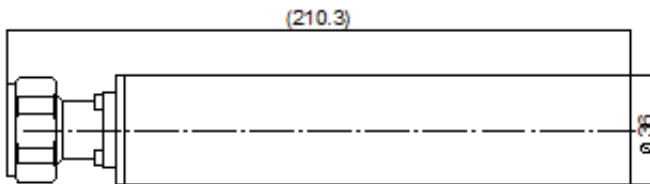

L-010MXNF-CC

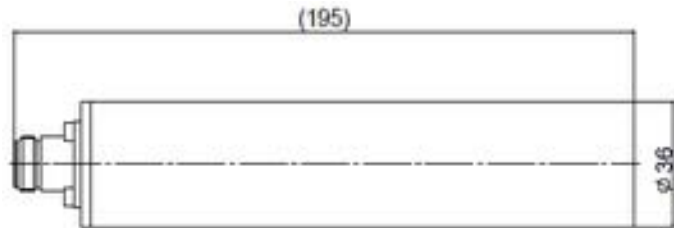

L-010MXNM-CC

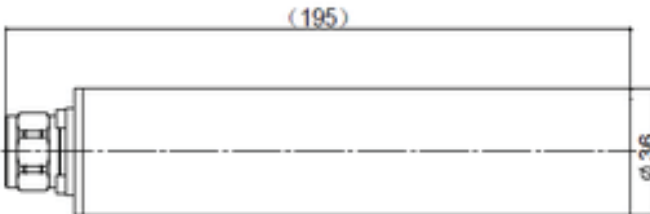

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.