

L-025DHxx-CC


This model was previously released as AL-025-DH-xx-CC

25W Termination Loads | Indoor Use

- Absorbs RF and microwave energy
- Available with a variety of connector options



Ordering Options		
Model Number	L-025DHF-CC	L-025DHNM-CC
Electrical Characteristics		
Frequency Range	DC-3 GHz	DC-3 GHz
VSWR	≤ 1.20	≤ 1.20
Power	25 W	25 W
Impedance	50Ω	50Ω
Mechanical Characteristics		
Dimensions (L x W x D without connectors)	72 x Ø45 mm	72 x Ø45 mm
Weight	0.198 kg	0.198 kg
Connector Type (xx)	N Female (NF)	N Male (NM)
Environmental Characteristics		
Operating Temperature	-35° C to +85° C	-35° C to +85° C
Application	Indoor	Indoor

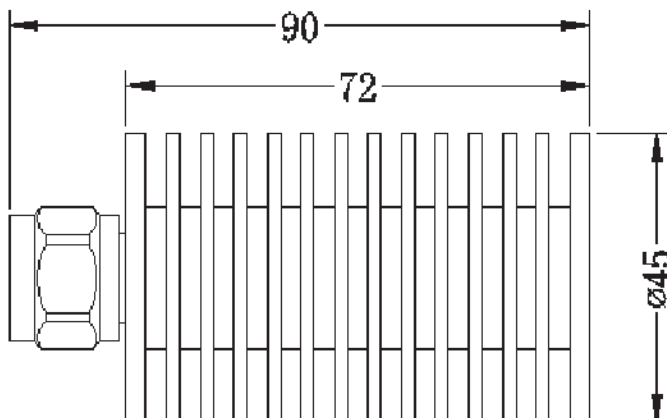

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.