



L-050DHxx-CC

This model was previously released as AL-050-DH-xx-CC



50W Termination Loads

- Absorbs RF and microwave energy
- Available with a variety of connector options

Ordering Options			
Model Number	L-050DHDM-CC	L-050DHN-CC	L-050DHNM-CC
		NO IMAGE AVAILABLE COMING SOON	
Electrical Characteristics			
Frequency Range	DC-3 GHz	DC-3 GHz	DC-3 GHz
VSWR	≤ 1.20	≤ 1.20	≤ 1.20
PIM (2x43 dBm)	---	≤ -100 dBc	≤ -100 dBc
Power	50 W	50 W	50 W
Impedance	50Ω	50Ω	50Ω
Mechanical Characteristics			
Dimensions (Height x Diameter)	139.5 x Ø50 mm	80 x 60 x 60 mm	80 x 60 x 60 mm
Connector Type (xx)	7/16-DIN Male (DM)	N Male (NF)	N Male (NM)
Environmental Characteristics			
Operating Temperature	-35° C to +85° C	-55° C to +85° C	-55° C to +85° C
Application	Indoor	Indoor / Outdoor	Indoor / Outdoor

L-050DHDM-CC

L-050DHNM-CC

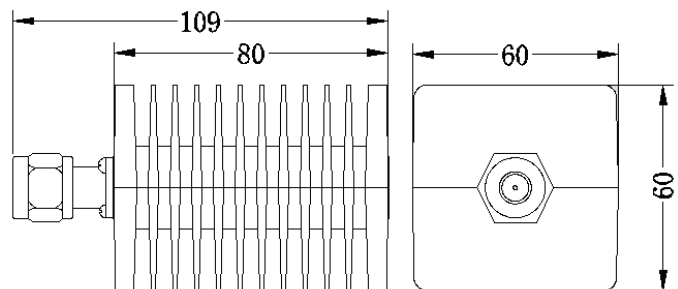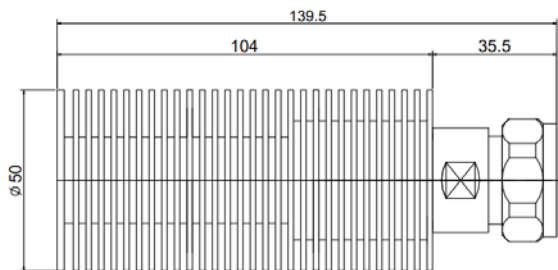

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.