

## L-050HNxx-CC


### 50W Termination Load

- Absorbs RF and microwave energy
- Available with a variety of connector options




Ordering Options		
Model Number (xx)	L-050HNDF-CC	L-050HNNF-CC
Electrical Characteristics		
Frequency Range	698-4000 MHz	
VSWR	≤ 1.25	
Power	50 W	
Impedance	50Ω	
Intermodulation (2 x 43 dBm)	≤ -150 dBc	
Mechanical Characteristics		
Connector Type (xx)	7/16-DIN Female (DF)	N Female (NF)
Environmental Characteristics		
Operating Temperature	-40° C to +55° C	
Relative Humidity	0-95%	
Application	IP65, Indoor / Outdoor	

L-050HNDF-CC Dimensions

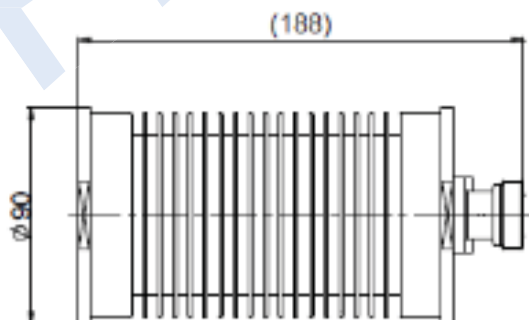

L-050HNNF-CC Dimensions

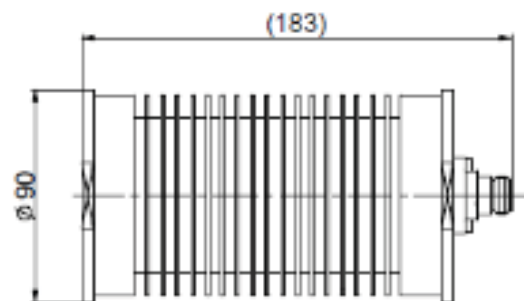

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.