

This model was previously released as AL-050-ML-xx-JJ

L-050MXxx-JJ

50W Termination Loads | Indoor / Outdoor Use


- Absorbs RF and microwave energy
- Available with a variety of connector options

Ordering Options			
Model Number	L-050MX43F-JJ	L-050MXDF-JJ	L-050MXNF-JJ
Electrical Characteristics			
Frequency Range	555-2700 MHz	555-2700 MHz	555-2700 MHz
Return Loss	19 dB	19 dB	19 dB
Power	50 W	50 W	50 W
Intermodulation	-160 dBc	-160 dBc	-160 dBc
Impedance	50Ω	50Ω	50Ω
Mechanical Characteristics			
Dimensions (Length x Width x Depth)	177 x 60 x 74 mm	180 x 60 x 74 mm	171 x 60 x 74
Weight	1.3 kg	1.29 kg	1.23 kg
Connector Type (xx)	4.3-10 Female (43F)	7/16-DIN Female (DF)	N Female (NF)
Packing Dimensions (L x W x D)	210 x 90 x 73 mm	210 x 90 x 73 mm	270 x 135 x 105 mm
Packing Weight	1.5 kg	1.5 kg	1.44 kg
Environmental Characteristics			
Operating Temperature	-40° C to +75° C	-40° C to +75° C	-40° C to +75° C
Application	Indoor / Outdoor	Indoor / Outdoor	Indoor / Outdoor
Standard	IP65	IP65	IP65

L-050MX43F-CC

L-050MXDF-CC

L-050MXNF-CC

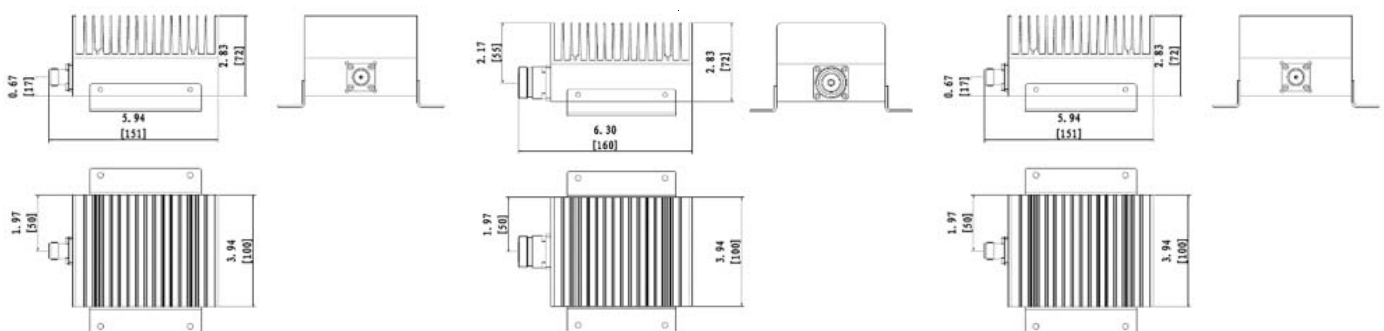

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.