

## L-200DXxx-CC

This model was previously released as AL-200-DL-xx-CC


200W Termination Loads | Indoor / Outdoor



- Absorbs RF and microwave energy
- Available with a variety of connector options

Ordering Options				
Model Number	L-200DX43F-CC	L-200DX43M-CC	L-200DXDF-CC	L-200DXNM-CC
<b>Electrical Characteristics</b>				
Frequency Range	DC-3GHz	DC-3GHz	DC-3GHz	DC-3GHz
VSWR	≤ 1.20	≤ 1.20	≤ 1.20	≤ 1.20
Power	200 W	200 W	200 W	200 W
IM (2x43 dBm)	≤ -160 dBc	≤ -160 dBc	≤ -160 dBc	≤ -160 dBc
Impedance	50Ω	50Ω	50Ω	50Ω
<b>Mechanical Characteristics</b>				
Dimensions (Height x Width x Depth without connectors)	191 x 81.5 x 191 mm	191 x 81.5 x 191 mm	191 x 81.5 x 191 mm	191 x 81.5 x 191 mm
Weight	5.8 kg	5.8 kg	5.8 kg	5.8 kg
Connector Type (xx)	4.3/10 Female (43F)	4.3/10 Male (43M)	7/16-DIN Female (DF)	N Male (NM)
<b>Environmental Characteristics</b>				
Operating Temperature	-35° C to +55° C	-35° C to +55° C	-35° C to +70° C	-35° C to +55° C
Application	Indoor / Outdoor	Indoor / Outdoor	Indoor / Outdoor	Indoor / Outdoor
Environmental	IP65	IP65	IP65	IP65

### Dimensions

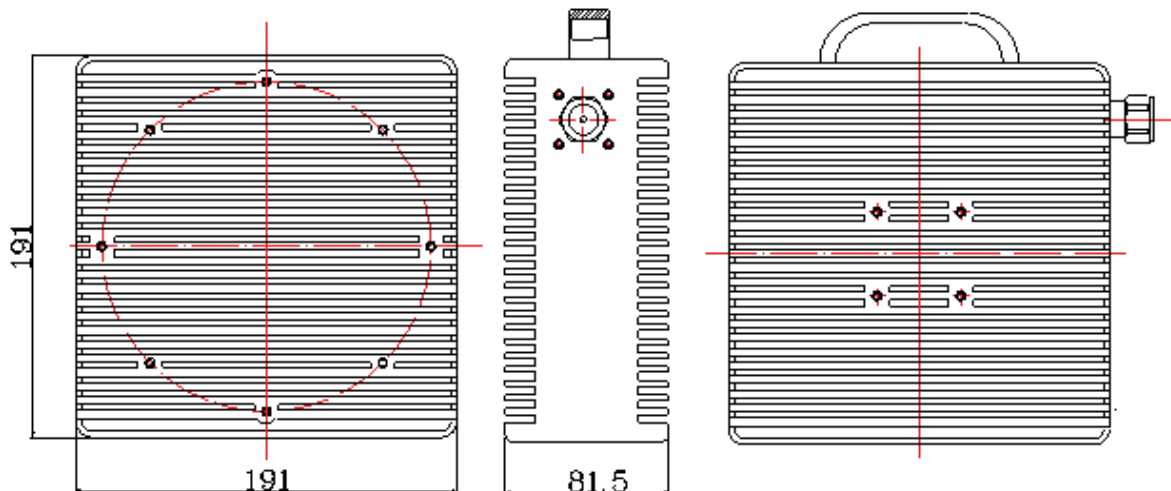

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.