


Weatherproofing Boots

- Easy and efficient installation
- Designed for repeated use
- IP68 protection guaranteed
- Long life cycle design
- Suitable for indoor or outdoor applications

Cable to Panel			
	Model Number	Cable Type	Connector Type
	WRB-12HFD-M-F	1/2" SuperFlexible	7/16-DIN Male
	WRB-12STD-M-F	1/2" Standard	7/16-DIN Male
	WRB-12STN-M-F	1/2" Standard	N-Type Male



Cable to Cable					
	Model Number	Cable Type A	Connector Type A	Cable Type B	Connector Type B
	B-12-78-0001-F	1/2" SuperFlexible	7/16-DIN Male	7/8" Standard	7/16-DIN Male

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


Weatherproofing Boots

Environmental		
Working Temperature	-55° to +155° C	-67° to +311° F
Waterproofing Standard	IP67	
Resistance	UV Resistant (1120W/960 h)	
	Acid Alkali Resistant	
Life Span	10 Years	

Assembly	
Adding Boot Before Connector Assembly	Adding Boot After Connector Assembly

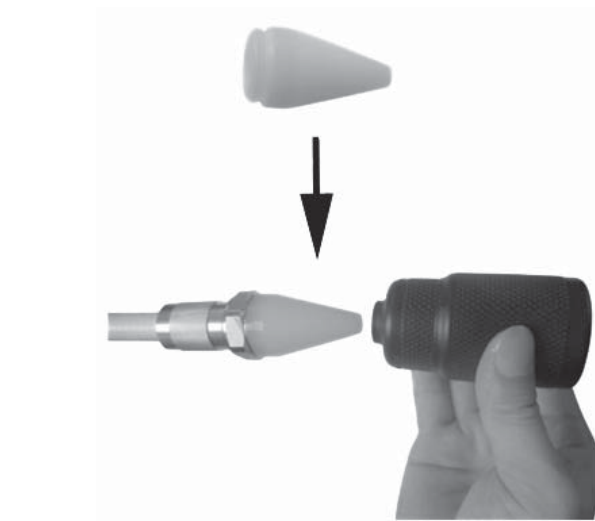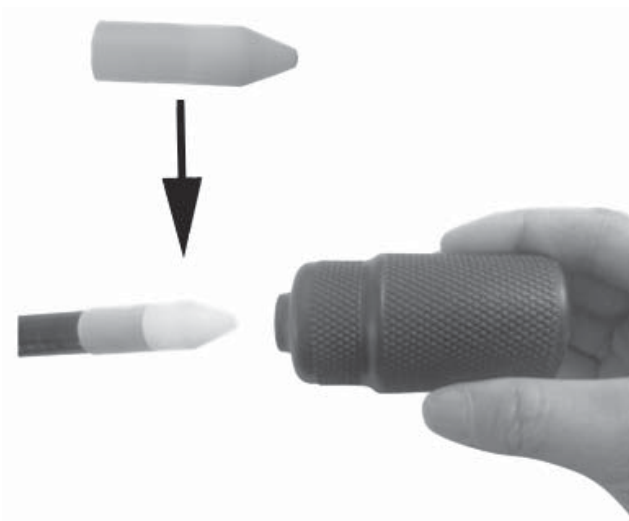

Installation

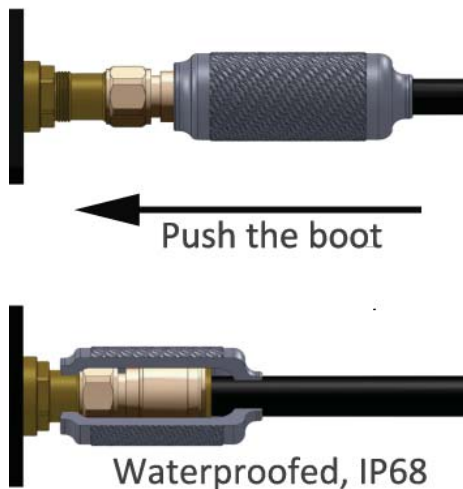

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.