


2C6U4VX065X06Fwxys4

Features

- Unique high port count panel antenna for 4G/5G small cell applications
- 24 total connectors to service the 696-960, 1695-2700 and 3300-4200 MHz bands
- Ideal for multi-carrier or 4x4 MIMO deployments
- Fixed tilt options

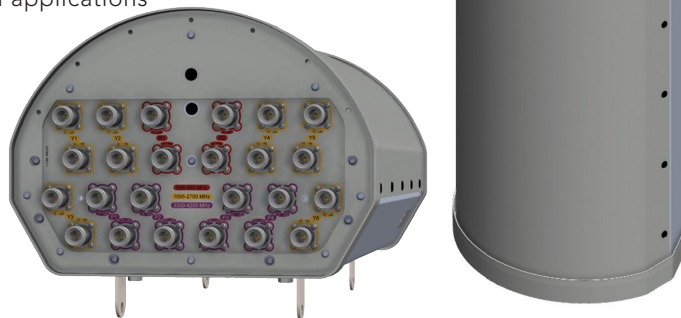

PRODUCT OVERVIEW	Frequency Range (MHz)	(2x) 696-960	(6x) 1695-2700	(4x) 3300-4200
	Array	■ R1, ■ R2	■ Y1, ■ Y2, ■ Y3, ■ Y4, ■ Y5, ■ Y6	■ P1, ■ P2, ■ P3, ■ P4
	Connector	4 PORTS	12 PORTS	8 PORTS
	Polarization	XPOL	XPOL	XPOL
	Azimuth Beamwidth (avg)	65°	65°	65°
	Electrical Downtilt	0°	2°, 4°, 6°	0°
	Maximum Continuous Power Per Port @ 50° C (122° F)	100 WATTS	100 WATTS	100 WATTS
	Maximum Total Continuous Power at 50° C (122° F)	2400 WATTS		
	Total Connector Count	24 PORTS		
	Connector Type	4.3-10 FEMALE		
	Dimensions	635 x 344 x 246 mm (25.0 x 13.5 x 9.7)		
	Radome Color Options	GREY		

ELECTRICAL SPECIFICATIONS

■ R1 ■ R2

Frequency Range		MHz	(2x) 696-960	
Frequency Sub-Range		MHz	696-806	806-960
Polarization		---	(2x) ±45°	
Gain	BASTA	dBi	7.9 ± 0.6	7.7 ± 0.8
	MAX	dBi	8.5	8.5
Azimuth Beamwidth (3 dB)		degrees	79.7° ± 10.4°	85.4° ± 14.3°
Elevation Beamwidth (3 dB)		degrees	74.8° ± 16.2°	66.8° ± 13.2°
Electrical Downtilt		degrees	(w) 0°	
Impedance		Ohms	50Ω	
VSWR		---	1.5:1	
Passive Intermodulation 3rd Order for 2x20 W Carriers		dBc	< -153	
Upper Sidelobe Suppression		dB	N/A	
Isolation	Intraband	dB	> 25	
	Interband	dB	> 28 same band; > 30 different band	

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

2C6U4VX065X06Fwxys4

ELECTRICAL SPECIFICATIONS

Y1 Y2 Y3 Y4 Y5 Y6

Frequency Range	MHz	(6x) 1695-2700			
Frequency Sub-Range	MHz	1695-1880	1850-1990	1920-2200	2300-2700
Polarization	---	(6x) ±45°			
Gain	BASTA	dBi	10.2 ± 1.0	10.0 ± 0.7	10.2 ± 0.8
	MAX	dBi	11.2	10.7	11.0
Azimuth Beamwidth (3 dB)	degrees	66.2° ± 16.5°	71.4° ± 9.3°	67.4° ± 11.4°	60.9° ± 11.5°
Elevation Beamwidth (3 dB)	degrees	45.0° ± 11.6°	43.9° ± 8.1°	41.3° ± 8.0°	34.3° ± 7.0°
Electrical Downtilt	degrees	(x) 2°, 4°, 6°			
Impedance	Ohms	50Ω			
VSWR	---	1.5:1			
Passive Intermodulation 3rd Order for 2x20 W Carriers	dBc	< -153			
Upper Sidelobe Suppression	dB	> 11			
Isolation	Intraband	dB	> 25		
	Interband	dB	> 28 same band; > 30 different band		

ELECTRICAL SPECIFICATIONS

P1 P2 P3 P4

Frequency Range	MHz	(4x) 3300-4200		
Frequency Sub-Range	MHz	3300-3550	3550-3700	3700-4200
Polarization	---	(4x) ±45°		
Gain	BASTA	dBi	11.2 ± 0.8	11.4 ± 1.0
	MAX	dBi	12.0	12.4
Azimuth Beamwidth (3 dB)	degrees	57.7° ± 14.8°	53.7° ± 22.4°	56.0° ± 19.4°
Elevation Beamwidth (3 dB)	degrees	32.2° ± 7.9°	33.0° ± 11.2°	33.5° ± 8.7°
Electrical Downtilt	degrees	(y) 0°		
Impedance	Ohms	50Ω		
VSWR	---	1.5:1		
Passive Intermodulation 3rd Order for 2x20 W Carriers	dBc	< -153		
Upper Sidelobe Suppression	dB	N/A		
Isolation	Intraband	dB	> 25	
	Interband	dB	> 28 same band; > 30 different band	


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

2C6U4VX065X06Fwxys4

MECHANICAL SPECIFICATIONS

Antenna	Length	mm (in)	635 (25.0)
	Width	mm (in)	344 (13.5)
	Depth	mm (in)	246 (9.7)
Net Weight - Antenna Only		kg (lbs)	8.2 (18)
Windload	Calculation	km/h (mph)	160 (100)
	Frontal	N (lbf)	262 (59)
	Side	N (lbf)	107 (24)
Survival Wind Speed		km/h (mph)	241 (150)
Wind Area		m ² (ft ²)	0.21 (2.3)
Connector	Type	---	4.3-10 Female
	Quantity	---	24
	Position	---	Bottom
Radome Color		---	Grey
Operating Temperature		degrees	-40 to +60 C (-40 to +140 F)
Lightning Protection (Grounding Type)		---	Direct Ground


2C6U4VX065X06Fwxys4

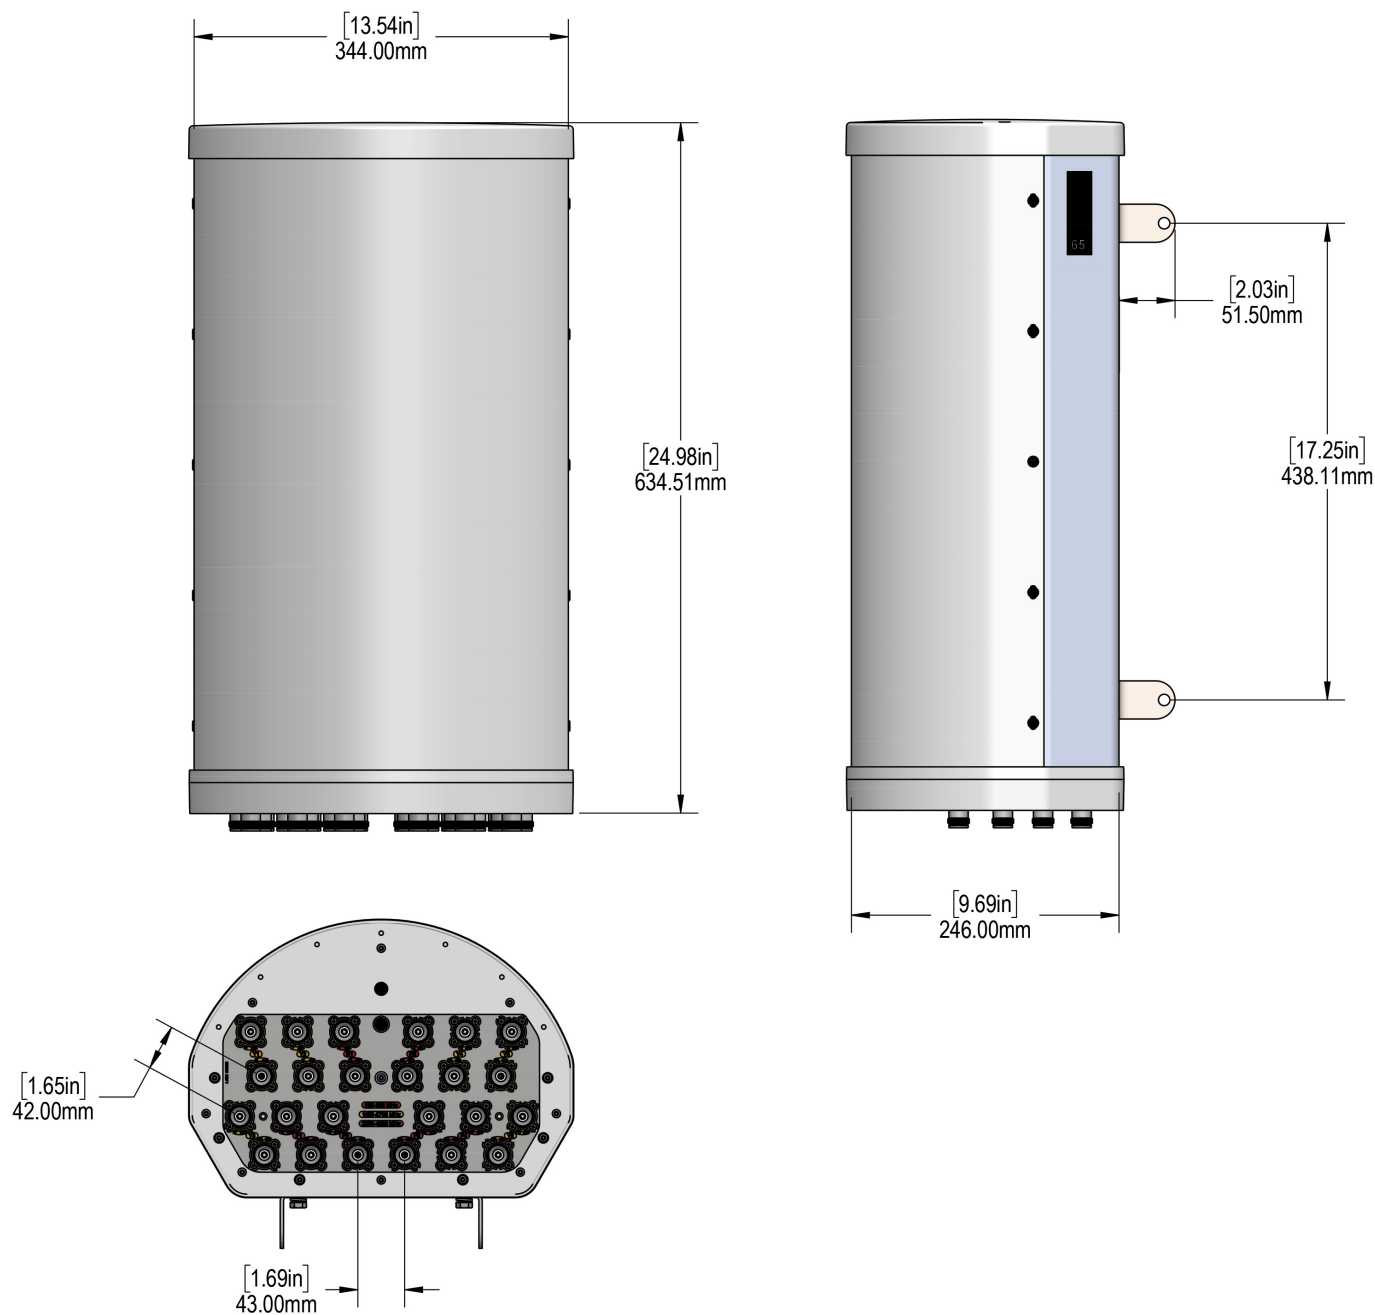

2C6U4VX065X06Fwxys4

ARRAY LAYOUT Topology


FREQUENCY	ARRAY	CONNECTOR	CONNECTOR TYPE
696-960 MHz	■ R1	1-2	(2x) 4.3-10 Female
696-960 MHz	■ R2	3-4	(2x) 4.3-10 Female
1695-2700 MHz	■ Y1	5-6	(2x) 4.3-10 Female
1695-2700 MHz	■ Y2	7-8	(2x) 4.3-10 Female
1695-2700 MHz	■ Y3	9-10	(2x) 4.3-10 Female
1695-2700 MHz	■ Y4	11-12	(2x) 4.3-10 Female
1695-2700 MHz	■ Y5	13-14	(2x) 4.3-10 Female
1695-2700 MHz	■ Y6	15-16	(2x) 4.3-10 Female
3300-4200 MHz	■ P1	17-18	(2x) 4.3-10 Female
3300-4200 MHz	■ P2	19-20	(2x) 4.3-10 Female
3300-4200 MHz	■ P3	21-22	(2x) 4.3-10 Female
3300-4200 MHz	■ P4	23-24	(2x) 4.3-10 Female

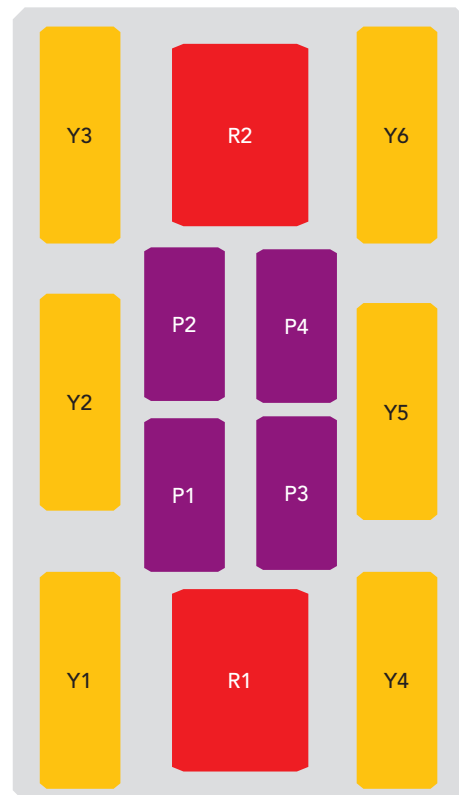

The illustration is not shown to scale.

2C6U4VX065X06Fwxys4

BOTTOM VIEW - LABELING

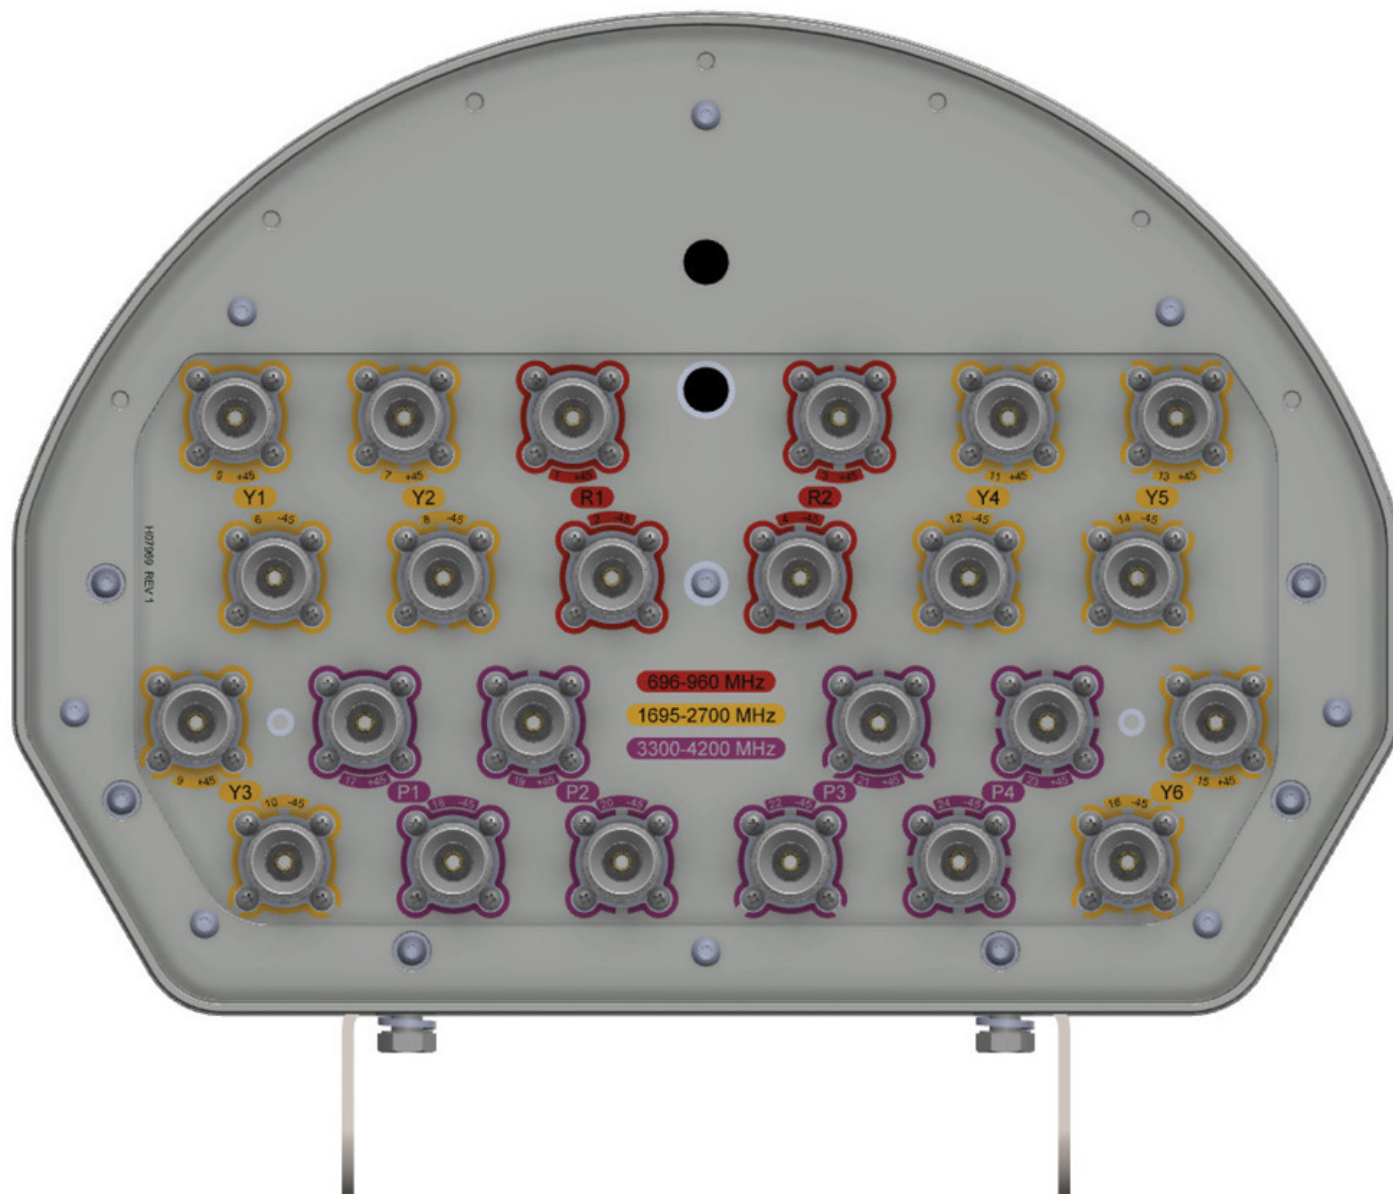

INSTALLATION Please read all installation notes before installing this product.



Always attach the antenna using all mounting points.

Do not install the antenna with the connectors facing upwards.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

2C6U4VX065X06Fwxys4

MOUNTING KITS Select from the following mounting options when ordering.

MODEL NUMBER	DESCRIPTION	FITS PIPE DIAMETER	WEIGHT
MKS09P01	2-POINT MOUNTING BRACKET KIT	50-115 mm (2.0-4.5 in)	2.9 kg (6 lbs)
MKS09T01	2-POINT, SCISSOR TILT, MOUNTING & DOWNTILT BRACKET KIT	50-115 mm (2.0-4.5 in)	4.5 kg (10 lbs)



The antennas shown in the mounting kit illustrations above are generic representations and may not resemble the antenna described within this data sheet.

2C6U4VX065X06Fwxy^s4

HOW TO READ THE MODEL NUMBER Each letter and number has meaning.

NUMBER OF BANDS and OPERATING FREQUENCY			PATTERN TYPE	AZIMUTH BMWIDTH	POLARIZATION	LENGTH	TILT TYPE	TILT OPTIONS	CONNECTOR TYPE	VARIATION	ORDERING OPTION
2C	6U	4V	X	065	X	06	F	wxy	s	4	-P -T
(2x) 696-960	(6x) 1695-2700	(4x) 3300-4200	Standard Panel Antenna	65°	XPOL	0.6 meters	Fixed Tilt	<p>These letters are placeholders for fixed tilt options.</p> <p>Refer to Electrical Specifications for available tilt options.</p>	4.3-10 Connector	4th generation enhanced mechanical package	<p>To order the antenna and mounting kit together as one line item, add a -P for the 2-POINT MOUNTING BRACKET KIT (MKS09P01) or a -T for the 2-POINT, SCISSOR TILT, MOUNTING & DOWNTILT BRACKET KIT (MKS09T01) to the end of the model number.</p> <p>If -P or -T is not added, the bracket kit can be added as a separate line item, or the antenna shipped without a bracket.</p> <p>Refer to the ordering options on the following page for further detail.</p>

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

2C6U4VX065X06Fwxys4

ORDERING OPTIONS Select from the following ordering options



SELECT MOUNTING KIT	SELECT DEGREE OF ELECTRICAL DOWNTILT FOR EACH BAND			ORDER MODEL NUMBER
	696-960 MHz	1695-2700 MHz	3300-4200 MHz	
ANTENNA ONLY - NO MOUNTING KIT	0°	2°	0°	2C6U4VX065X06F020s4
	0°	4°	0°	2C6U4VX065X06F040s4
	0°	6°	0°	2C6U4VX065X06F060s4
ANTENNA WITH MKS09P01 MOUNTING KIT 2-Point Mounting Bracket Kit	0°	2°	0°	2C6U4VX065X06F020s4-P
	0°	4°	0°	2C6U4VX065X06F040s4-P
	0°	6°	0°	2C6U4VX065X06F060s4-P
ANTENNA WITH MKS09T01 MOUNTING KIT 2-Point, Scissor Tilt, Mounting & Down-tilt Bracket Kit	0°	2°	0°	2C6U4VX065X06F020s4-T
	0°	4°	0°	2C6U4VX065X06F040s4-T
	0°	6°	0°	2C6U4VX065X06F060s4-T

2C6U4VX065X06Fwxys4



750 MHz ————

850 MHz ————

■ R1, 0° TILT

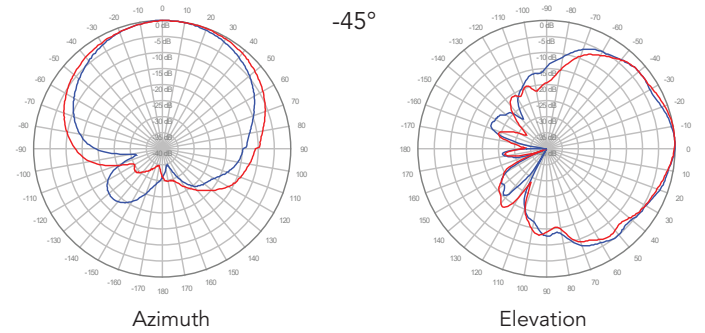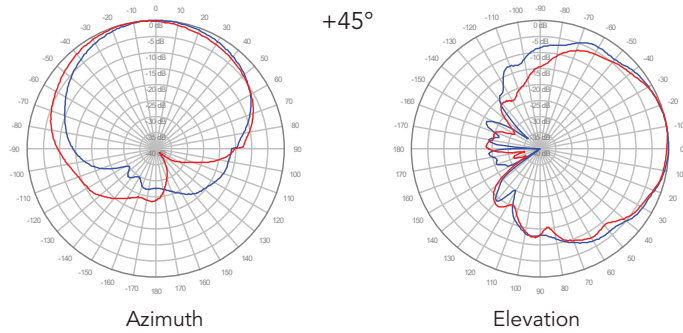


■ R2, 0° TILT

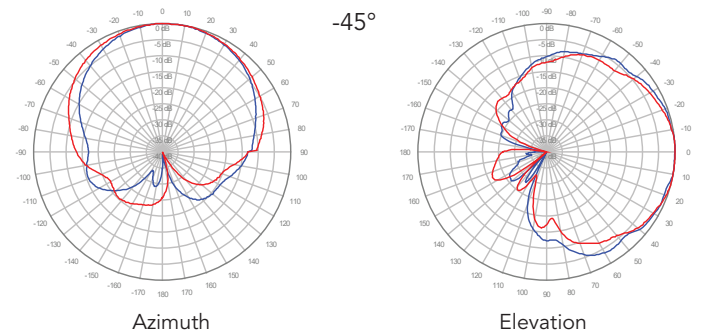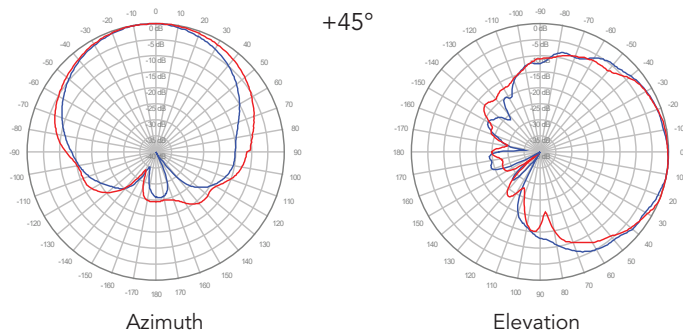


2C6U4VX065X06Fwxys4

1800 MHz —
1900 MHz —
2100 MHz —
2600 MHz —


Y1, 2° TILT

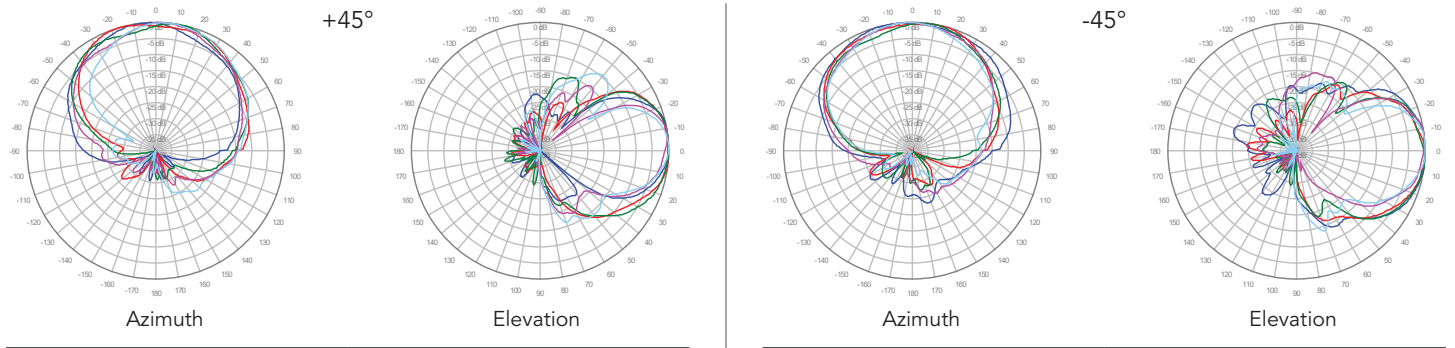


Y2, 2° TILT

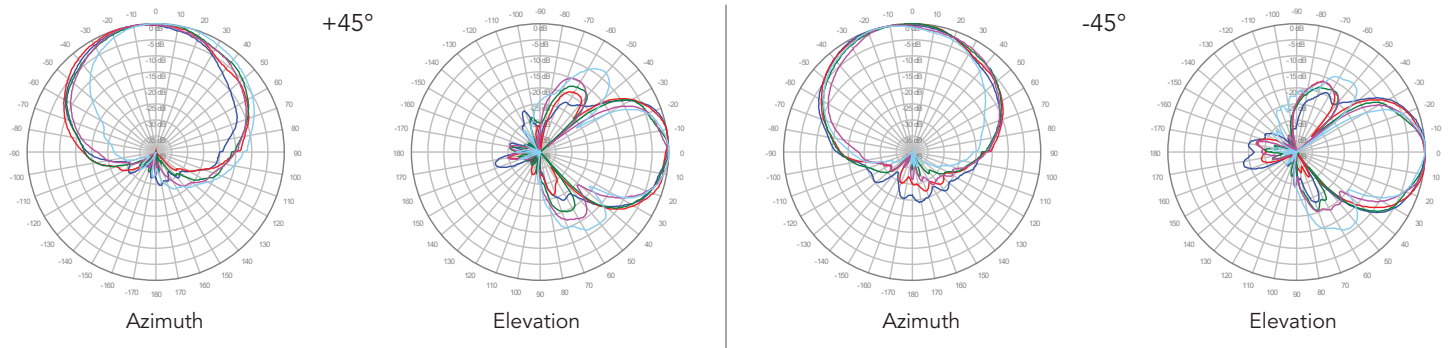

Y3, 2° TILT

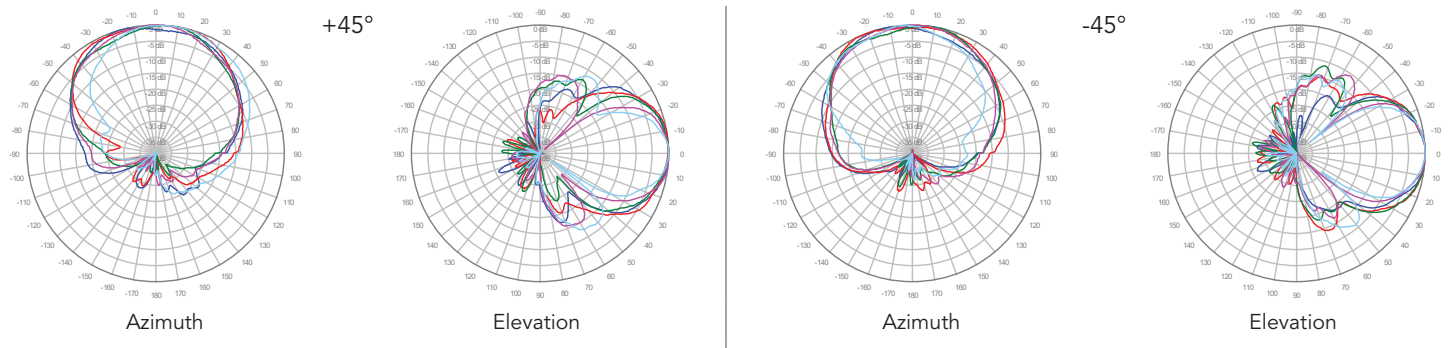

Y4, 2° TILT


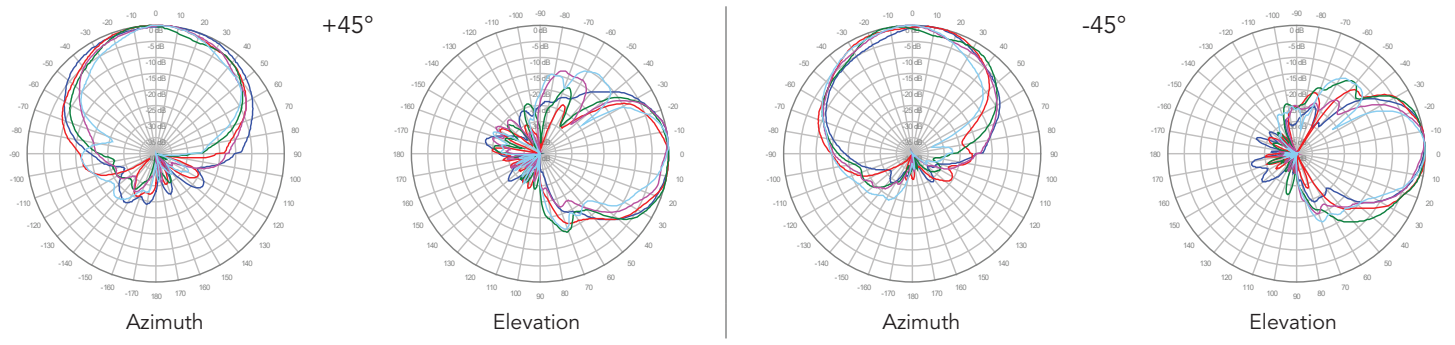


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.



2C6U4VX065X06Fwxys4

1800 MHz —
1900 MHz —
2100 MHz —
2600 MHz —

■ Y5, 2° TILT

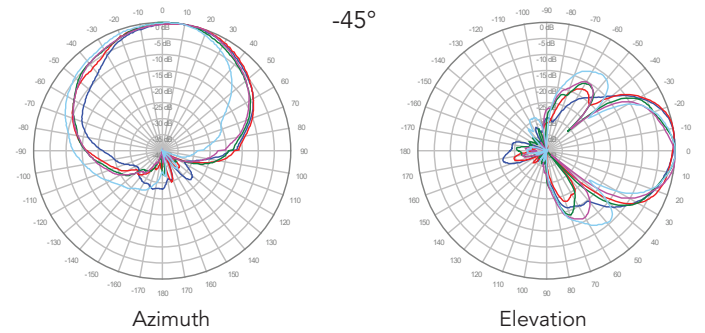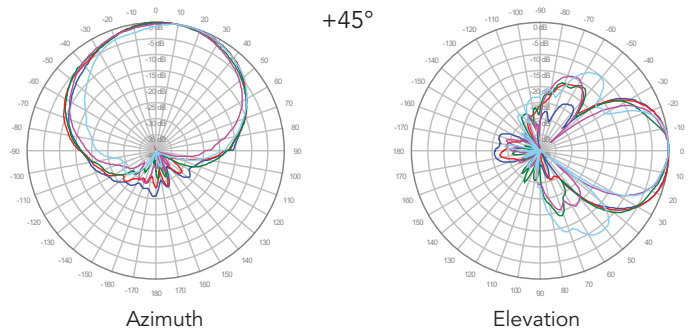


■ Y6, 2° TILT

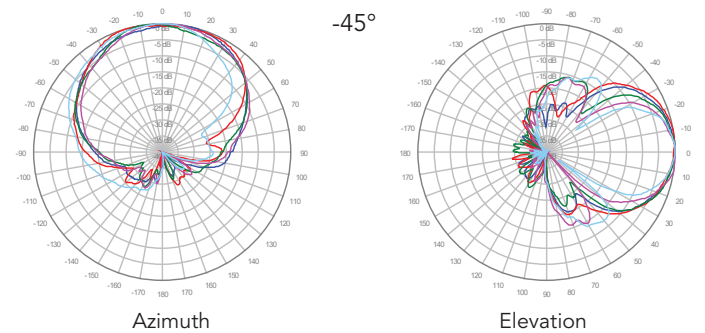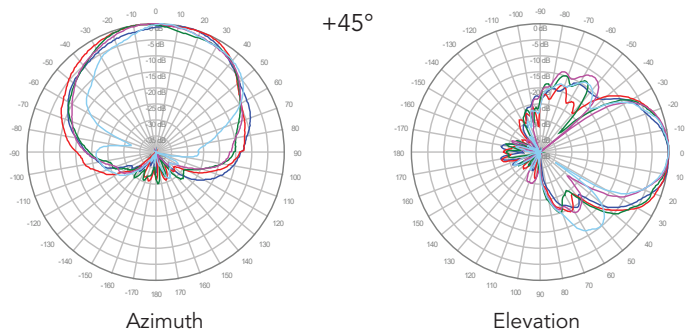


2C6U4VX065X06Fwxys4

1800 MHz —
1900 MHz —
2100 MHz —
2600 MHz —


Y1, 4° TILT

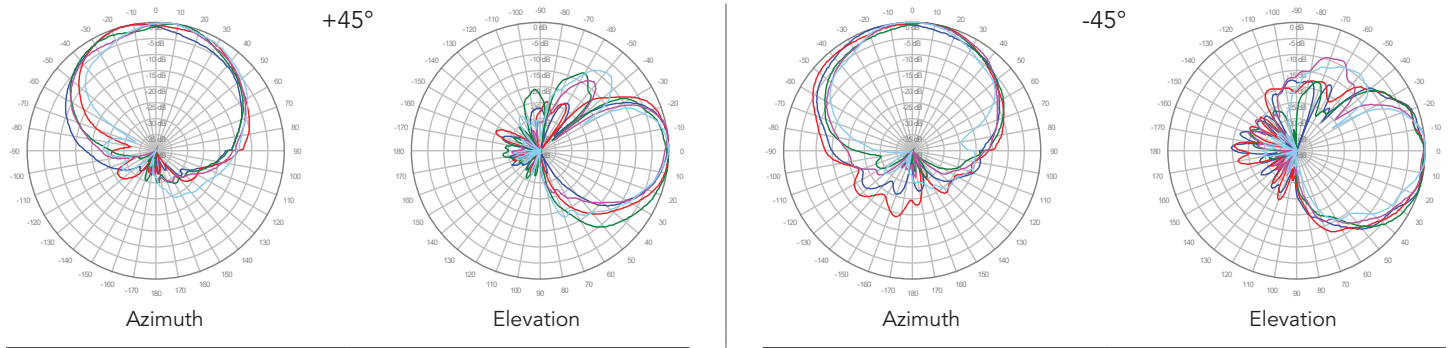


Y2, 4° TILT

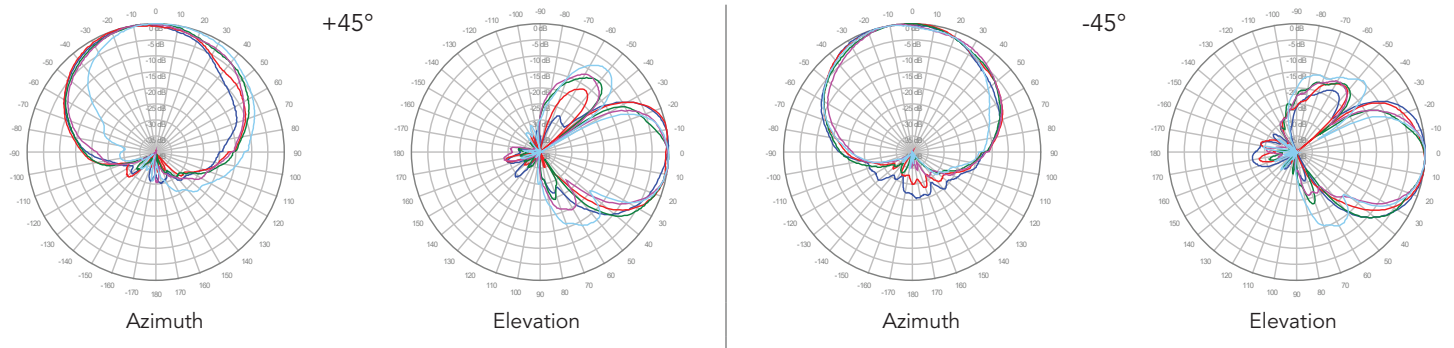

Y3, 4° TILT

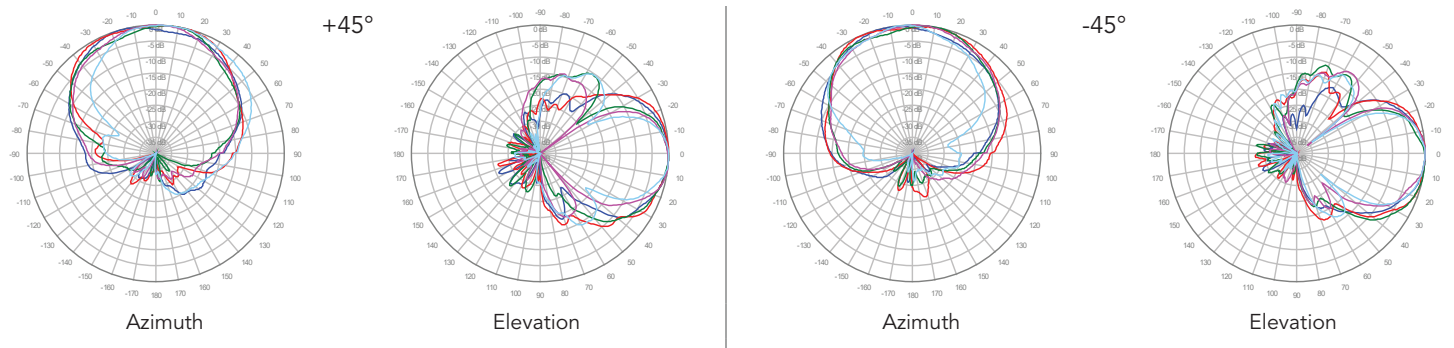

Y4, 4° TILT


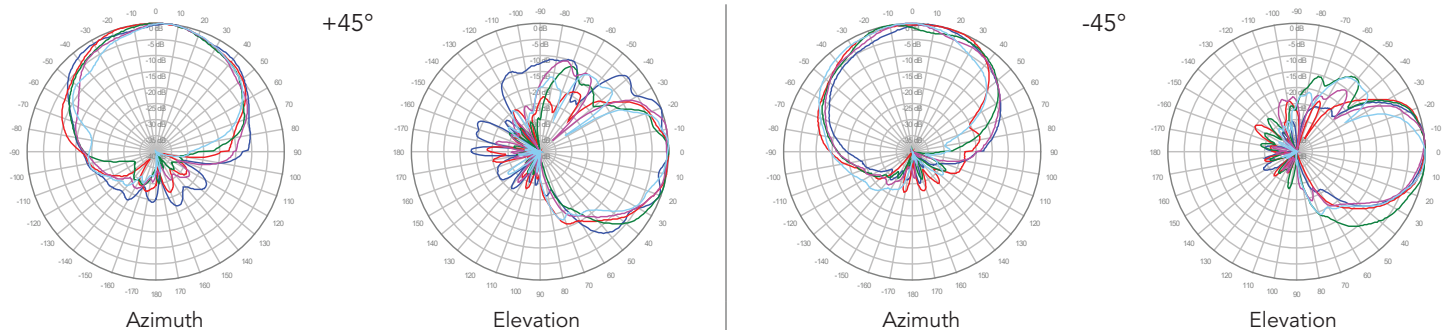


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.



2C6U4VX065X06Fwxys4

1800 MHz —
1900 MHz —
2100 MHz —
2600 MHz —

■ Y5, 4° TILT

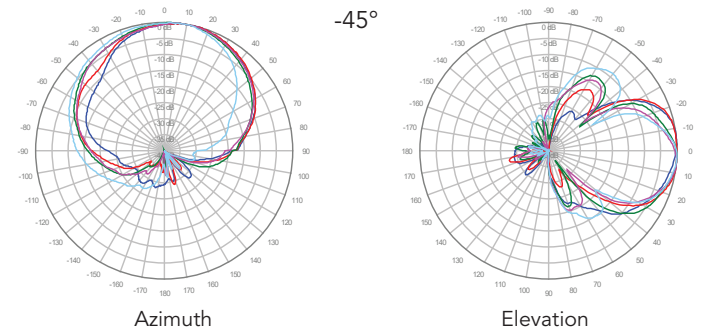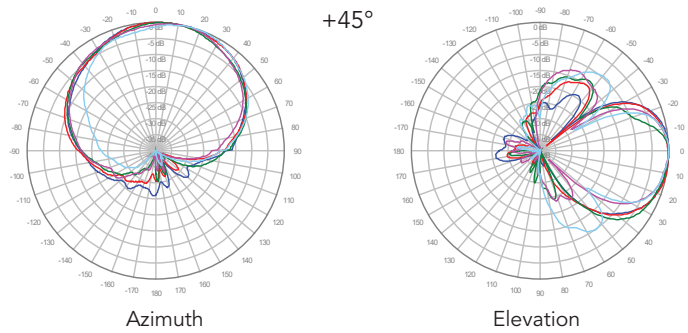


■ Y6, 4° TILT

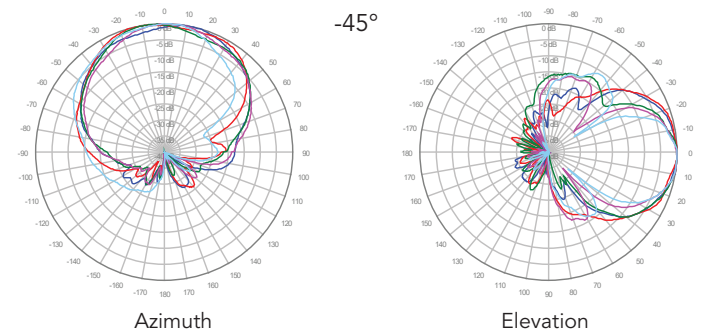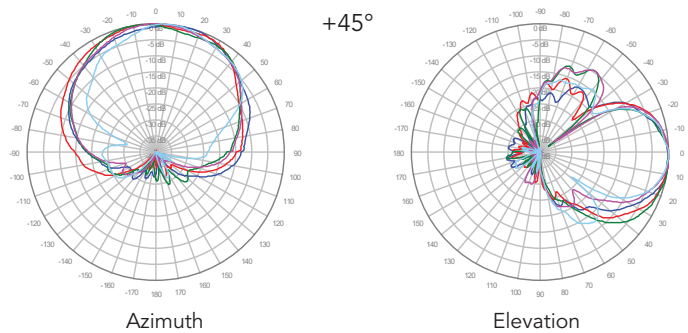


2C6U4VX065X06Fwxys4

1800 MHz —
1900 MHz —
2100 MHz —
2600 MHz —


Y1, 6° TILT

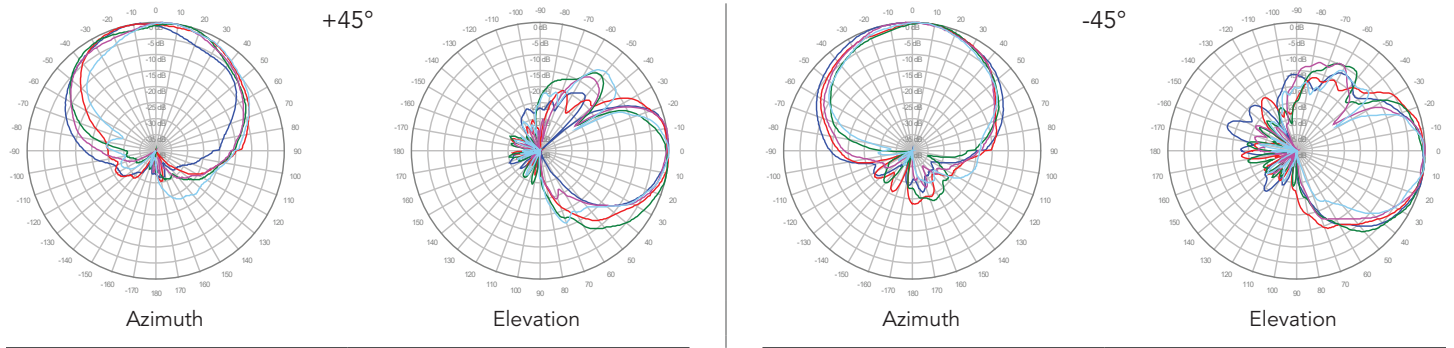


Y2, 6° TILT

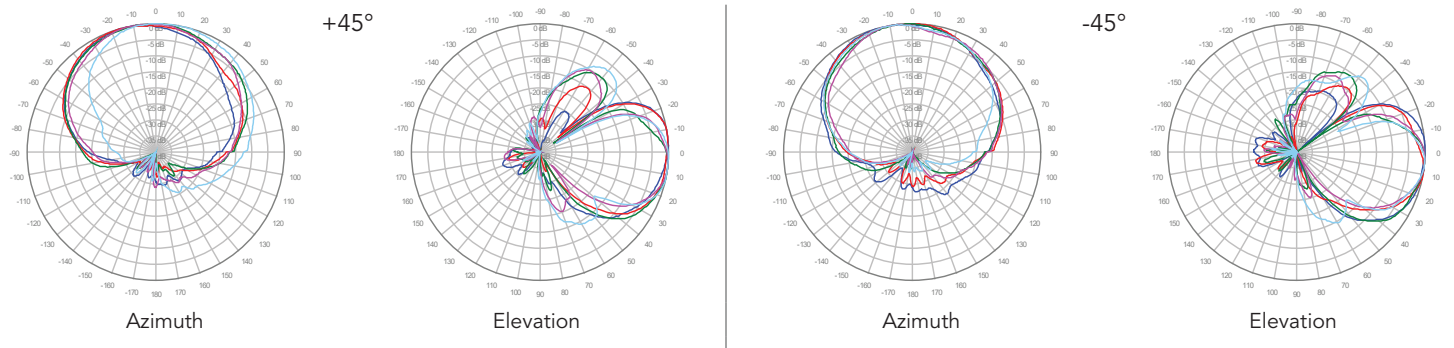

Y3, 6° TILT

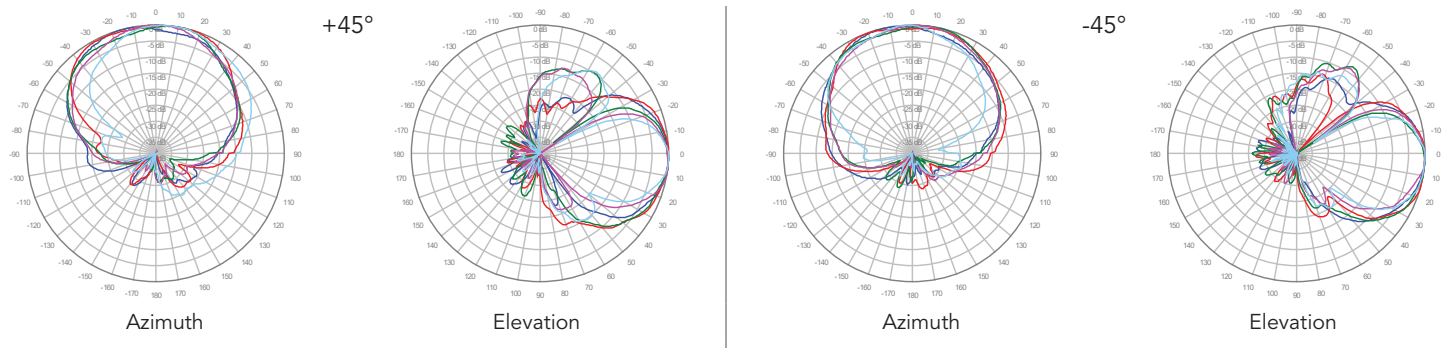

Y4, 6° TILT


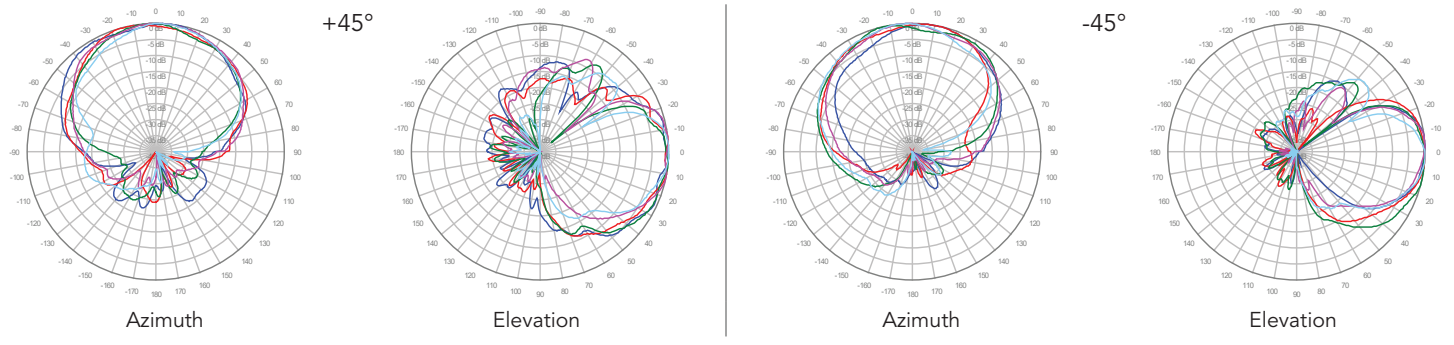


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.



2C6U4VX065X06Fwxys4

1800 MHz —
1900 MHz —
2100 MHz —
2600 MHz —

■ Y5, 6° TILT

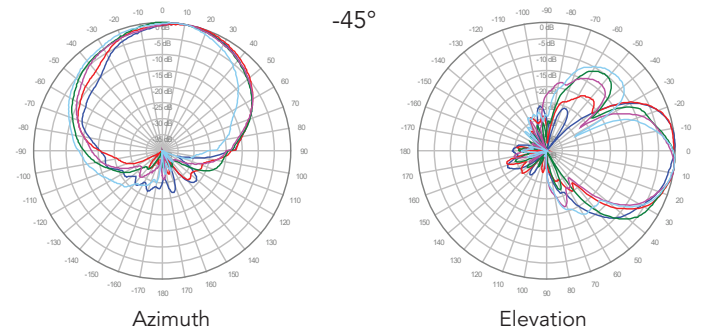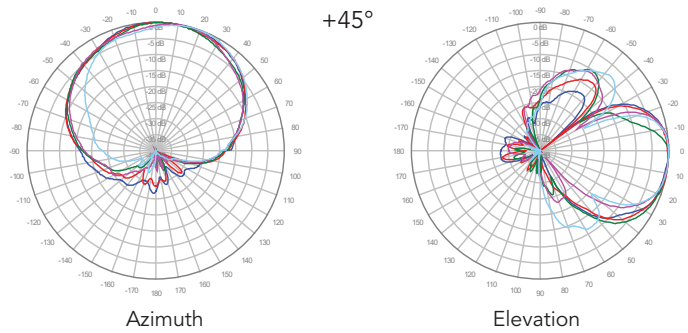


■ Y6, 6° TILT

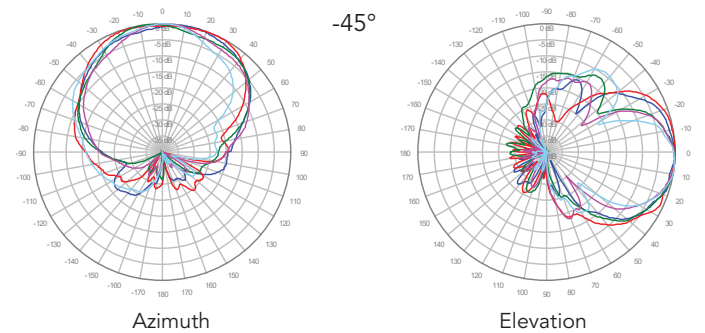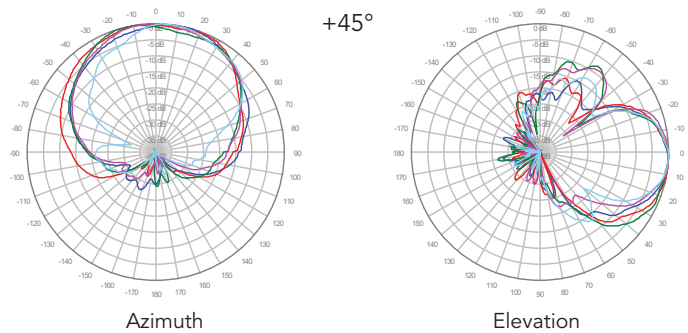


2C6U4VX065X06Fwxys4


■ P1, 0° TILT

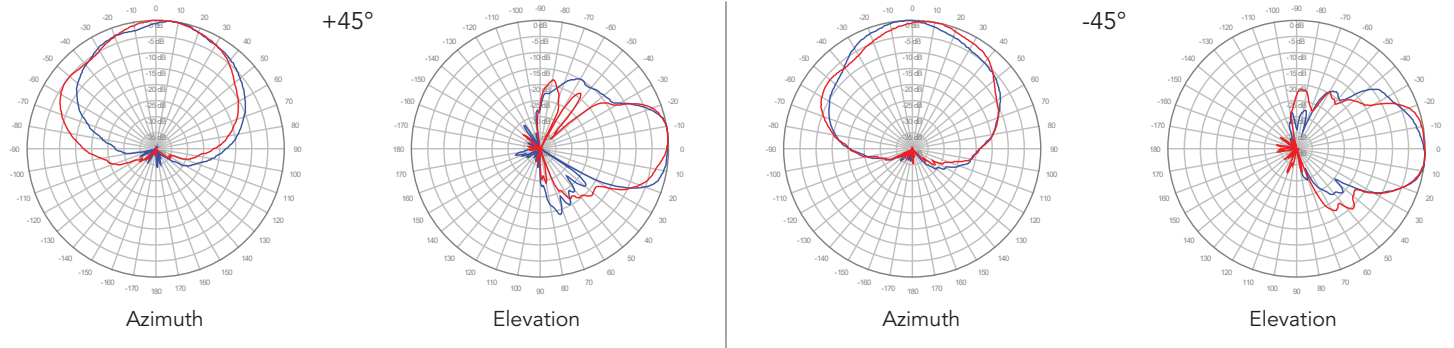


■ P2, 0° TILT

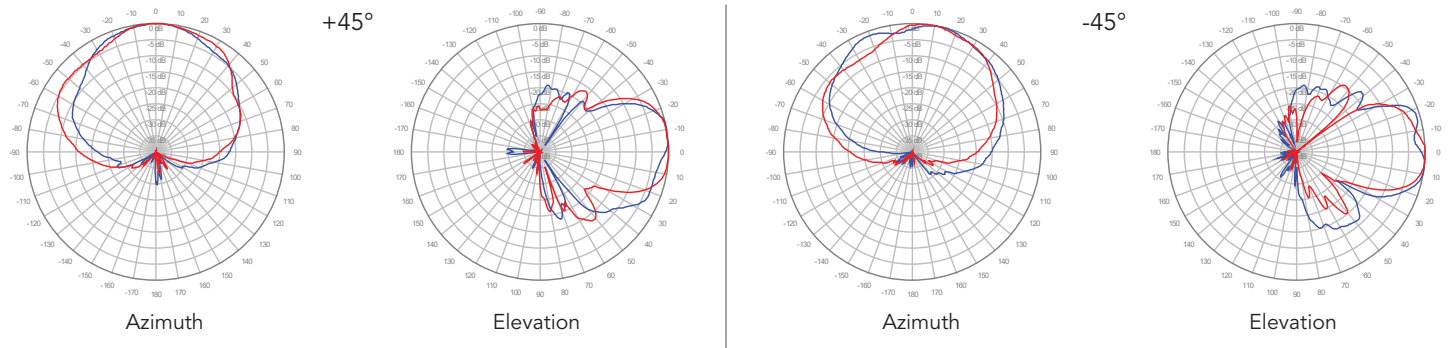

■ P3, 0° TILT

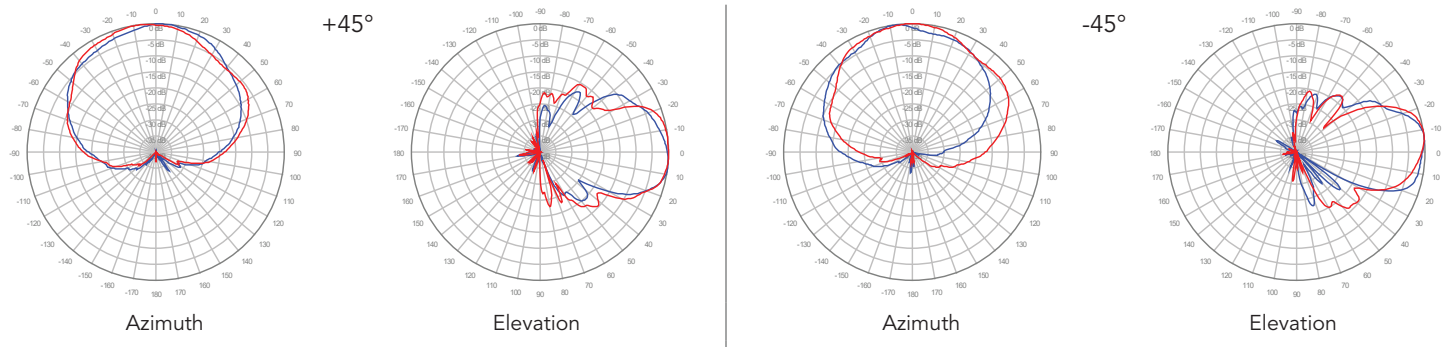

■ P4, 0° TILT

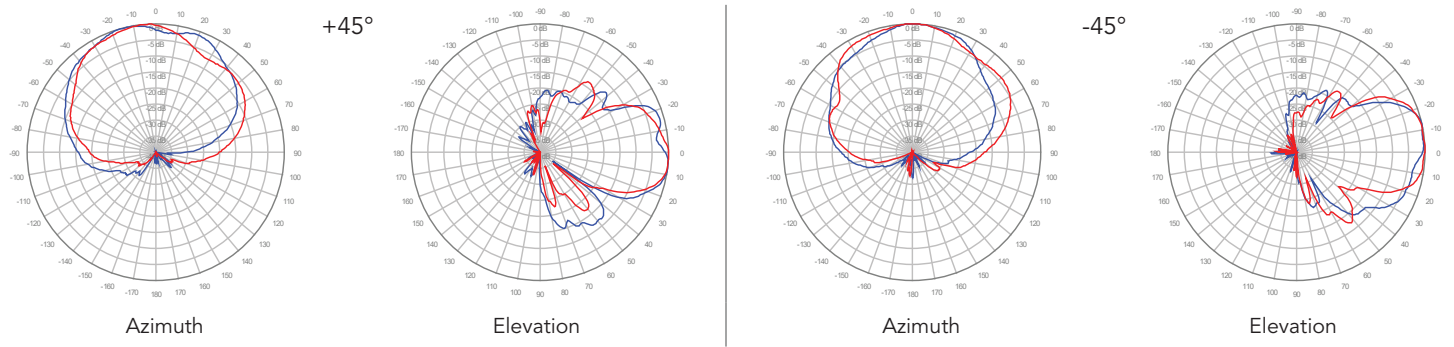

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.