

## 2U3MT360X06F<sub>xy</sub>s4



### Features

- Pseudo omni configuration with 10 connectors
- Narrow 9.5" diameter for tough zoning restrictions
- Improved balance between Mid Band and C-Band coverage without sacrificing Mid Band gain
- Ideal for MIMO deployments
- Broadband networks 1695-2700 and 3300-4200 MHz
- Easily removable lifting ring
- 5GHz U-NII FCC compliant

PRODUCT OVERVIEW	Frequency Range (MHz)	(2x) 1695-2700	(2x) 3300-4200	(1x) 5150-5925
	Array	■ Y1, ■ Y2	■ P1, ■ P2	■ O1
	Connector	4 PORTS	4 PORTS	2 PORTS
	Polarization	XPOL	XPOL	XPOL
	Azimuth Beamwidth (avg)	360°	360°	360°
	Electrical Downtilt	2°, 4°, 6°	2°, 4°, 6°	0°
	Configuration	OMNI CONFIGURATION		
	Maximum Continuous Power Per Port @ 50° C (122° F)	300 WATTS	100 WATTS	50 WATTS BUT MUST MEET U-NII
	Maximum Total Continuous Power at 50° C (122° F)	1650 WATTS		
	Connector Type	(10x) 4.3-10 FEMALE CONNECTORS		
	Dimensions	610 x Ø241 mm (24.0 x Ø9.5 in)		
	Radome Color Options	GREY, BROWN or BLACK		

### ELECTRICAL SPECIFICATIONS

■ Y1 ■ Y2

Frequency Range		MHz	(2x) 1695-2700			
Frequency Sub-Range		MHz	1695-1880	1850-1990	1920-2200	2300-2700
Polarization		---	(2x) ±45°			
Gain	BASTA	dBi	8.7 ± 1.0	9.5 ± 1.3	9.5 ± 1.3	10.2 ± 1.2
	MAX	dBi	9.7	10.8	10.8	11.4
Azimuth Beamwidth (3 dB)		degrees	360°	360°	360°	360°
Elevation Beamwidth (3 dB)		degrees	20.7° ± 2.3°	19.3° ± 1.3°	18.1° ± 2.1°	14.9° ± 1.6°
Electrical Downtilt		degrees	(x) 2°, 4°, 6°; Refer to ordering options for exact combinations			
Impedance		Ohms	50Ω			
VSWR		---	≤ 1.5:1			
Passive Intermodulation 3rd Order for 2x20 W Carriers		dBc	< -153			
Upper Sidelobe Suppression		dB	> 15			
Isolation	Intraband	dB	> 25			
	Interband	dB	> 28			

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 2U3MT360X06F<sub>xys</sub>4

### ELECTRICAL SPECIFICATIONS

■ P1 ■ P2

Frequency Range	MHz	(2x) 3300-4200		
Frequency Sub-Range	MHz	3300-3550	3550-3700	3700-4200
Polarization	---	(2x) $\pm 45^\circ$		
Gain	BASTA	dBi	$8.8 \pm 1.2$	$9.5 \pm 1.5$
	MAX	dBi	10.0	11.0
Azimuth Beamwidth (3 dB)	degrees	360°	360°	360°
Elevation Beamwidth (3 dB)	degrees	$11.9^\circ \pm 1.3^\circ$	$11.5^\circ \pm 1.1^\circ$	$10.2^\circ \pm 0.9^\circ$
Electrical Downtilt	degrees	(y) 2°, 4°, 6°; Refer to ordering options for exact combinations		
Impedance	Ohms	50Ω		
VSWR	---	$\leq 1.5:1$		
Passive Intermodulation 3rd Order for 2x20 W Carriers	dBc	< -153 dBc		
Upper Sidelobe Suppression	dB	> 15		
Isolation	Intraband	dB	> 25	
	Interband	dB	> 28	

### ELECTRICAL SPECIFICATIONS

■ O1


Frequency Range		MHz	(1x) 5150-5925
Polarization		---	(1x) ±45°
Gain	BASTA	dBi	4.0 ± 1.0
	MAX	dBi	5.0
Azimuth Beamwidth (3 dB)		degrees	360°
Elevation Beamwidth (3 dB)		degrees	18.1° ± 2.1°
Electrical Downtilt		degrees	0°
Impedance		Ohms	50Ω
VSWR		---	≤ 1.5:1
Passive Intermodulation 3rd Order for 2x20 W Carriers		dBc	N/A
Upper Sidelobe Suppression		dB	Meets all U-NII compliance specifications
Isolation	Intraband	dB	> 25
	Interband	dB	> 28
U-NII Compliant		---	Yes

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 2U3MT360X06F<sub>xy</sub>s4

### MECHANICAL SPECIFICATIONS

Antenna	Height	mm (in)	610 (24.0)
	Diameter	mm (in)	241 (9.5)
Net Weight - Antenna Only		kg (lbs)	8.2 (18)
Windload	Calculation	km/h (mph)	160 (100)
	Frontal	N (lbf)	78 (18)
Survival Wind Speed		km/h (mph)	241 (150)
Wind Area		m <sup>2</sup> (ft <sup>2</sup> )	0.15 (1.6)
Volume		m <sup>3</sup> (ft <sup>3</sup> )	0.03 (0.98)
Connector	Type	---	(10x) 4.3-10 Female Connectors
	Position	---	Bottom
Radome Color		---	Grey (Pantone 420 C), Brown (Pantone 476 C), Black (RAL 9011)
Lightning Protection (Grounding Type)		---	Direct Ground

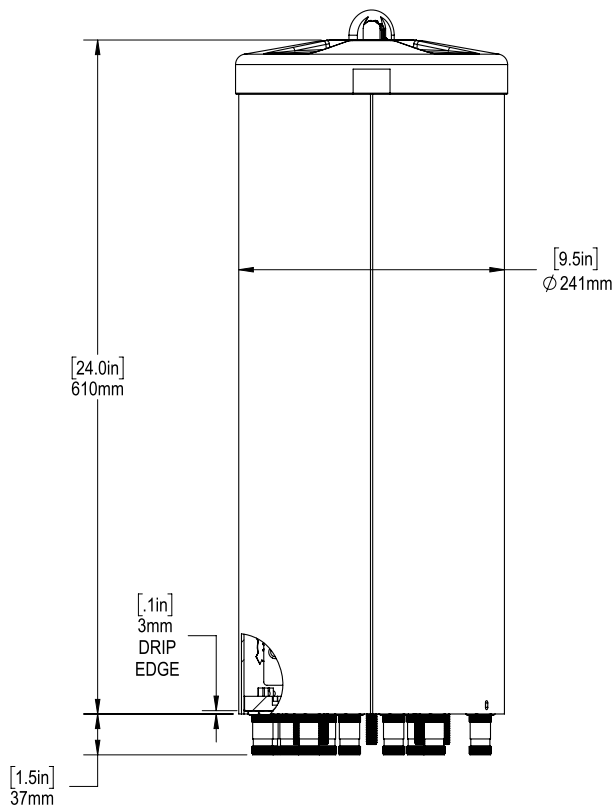


FRONT VIEW  
NOTE: SEAM OF RADOME  
IS ORIENTED TO 0 DEG

2U3MT360X06F
xys4

ARRAY LAYOUT
Topology

FREQUENCY	ARRAY	CONNECTOR	CONNECTOR TYPE
1695-2700 MHz	<div>Y1</div>	1-2	(2x) 4.3-10 Female
1695-2700 MHz	<div>Y2</div>	3-4	(2x) 4.3-10 Female
3300-4200 MHz	<div>P1</div>	5-6	(2x) 4.3-10 Female
3300-4200 MHz	<div>P2</div>	7-8	(2x) 4.3-10 Female
5150-5925 MHz	<div>O1</div>	9-10	(2x) 4.3-10 Female

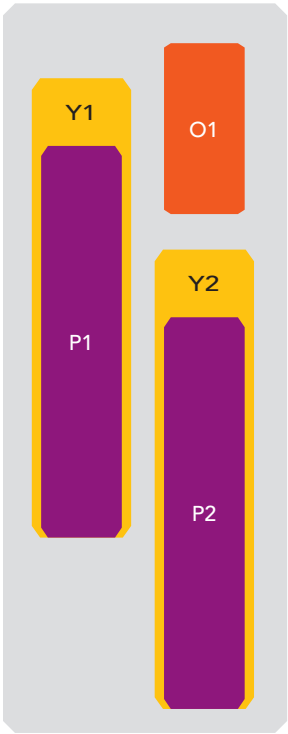

The illustration is not shown to scale.


## 2U3MT360X06F<sub>xy</sub>s4

### BOTTOM VIEW - LABELING



## 2U3MT360X06F<sub>xy</sub>s4

### BOTTOM VIEW - CONNECTOR DIAGRAM

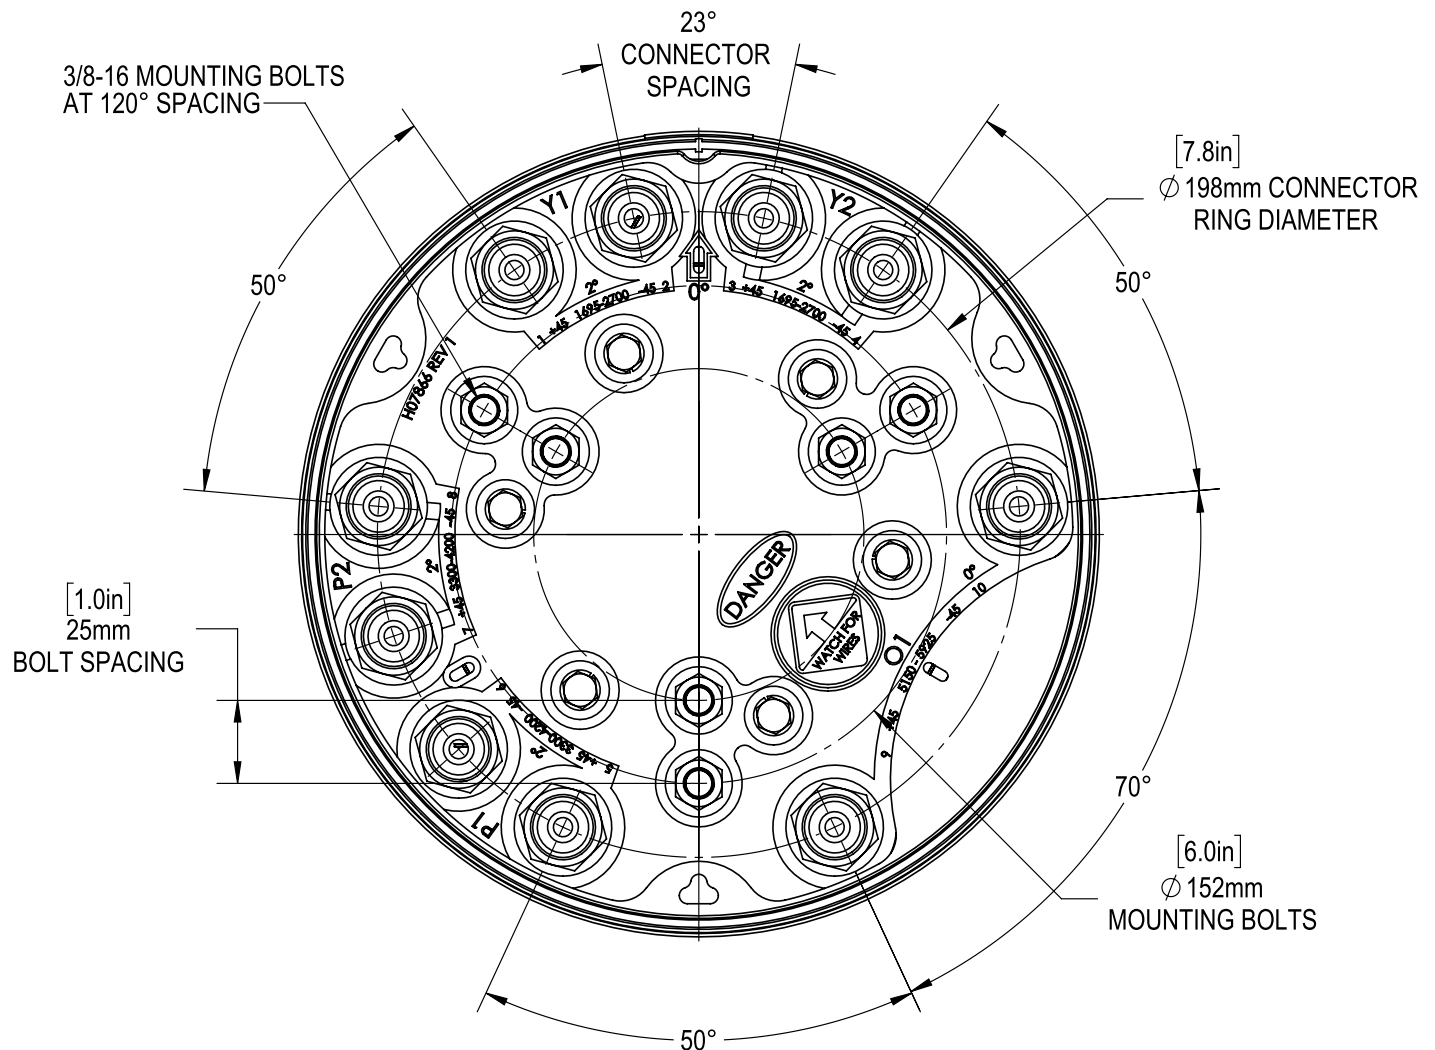

**INSTALLATION** Please read all installation notes before installing this product.




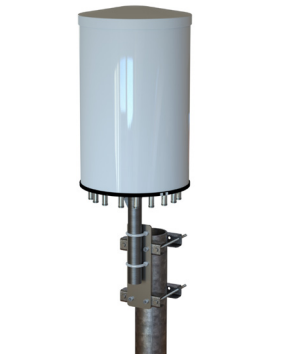

Always attach the antenna using all mounting points.

Do not install the antenna with the connectors facing upwards.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

# 2U3MT360X06F<sub>xy</sub>s4

**MOUNTING KITS** Select from the following mounting options when ordering. Mounting kits for canister antennas are ordered as a separate line item.

MODEL NUMBER		DESCRIPTION
CWT-MKS-SIDE		SIDE MOUNTING BRACKET KIT FOR CANISTER ANTENNA
CWT-MKS-TOP		TOP MOUNTING BRACKET KIT FOR CANISTER ANTENNA
WB3X-MKS-01		UTILITY POLE MOUNTING BRACKET KIT FOR CANISTER ANTENNA

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.



## 2U3MT360X06F<sub>xy</sub>s4

### HOW TO READ THE MODEL NUMBER Each letter and number has meaning.

NUMBER OF BANDS & OPERATING FREQUENCY			PATTERN TYPE	AZIMUTH BEAMWIDTH	POLARIZATION	LENGTH	TILT TYPE	TILT OPTIONS	CONNECTOR TYPE	VARIATION	RADOME COLOR OPTIONS
2U	3M		T	360	X	06	F	xy	s	4	BK BR
(2x) 1695-2700	(2x) 3300-4200	(1x) 5150-5925	Tri-Sector	360°	XPOL	0.6 meters	Fixed Tilt	These letters are placeholders for fixed tilt options.  Refer to Electrical Specifications for available tilt options.	4.3-10 Connector	4th generation enhanced mechanical package	BK indicates a Black radome.  BR indicates a Brown radome.  The default radome color is Grey. No letters are required for a Grey radome.

### ORDERING OPTIONS Select from the following ordering options

SELECT RADOME COLOR	SELECT DEGREE OF ELECTRICAL DOWNTILT FOR EACH BAND			ORDER MODEL NUMBER
	1695-2700 MHz	3300-4200 MHz	5150-5925 MHz	
Grey Pantone 420 C	2°	2°	0°	2U3MT360X06F22s4
	4°	4°	0°	2U3MT360X06F44s4
	6°	6°	0°	2U3MT360X06F66s4
Brown Pantone 476 C	2°	2°	0°	2U3MT360X06F22s4BR
	4°	4°	0°	2U3MT360X06F44s4BR
	6°	6°	0°	2U3MT360X06F66s4BR
Black RAL 9011	2°	2°	0°	2U3MT360X06F22s4BK
	4°	4°	0°	2U3MT360X06F44s4BK
	6°	6°	0°	2U3MT360X06F66s4BK

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.



OMNI



24.0 IN

FIXED TILT



**2U3MT360X06F***xy*s4

1800 MHz ———  
1900 MHz ———  
2100 MHz ———  
2600 MHz ———

■ **Y1, 2° TILT**



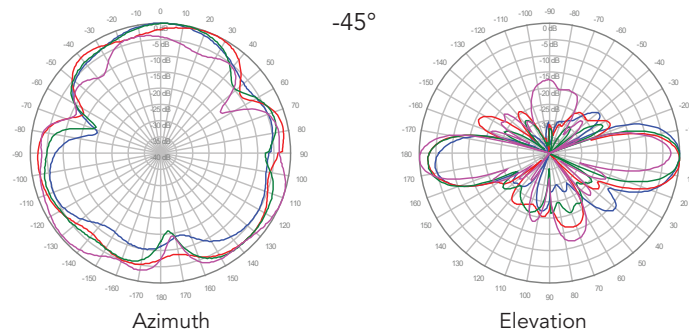
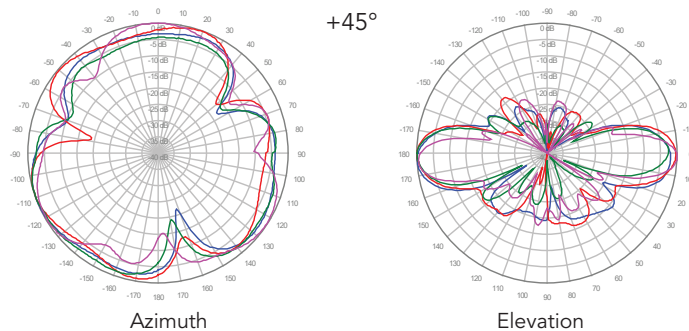


■ **Y2, 2° TILT**



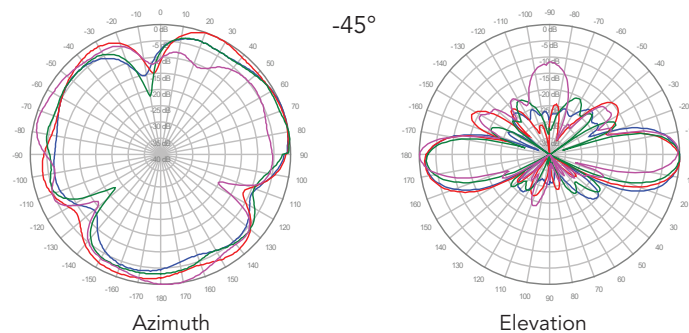
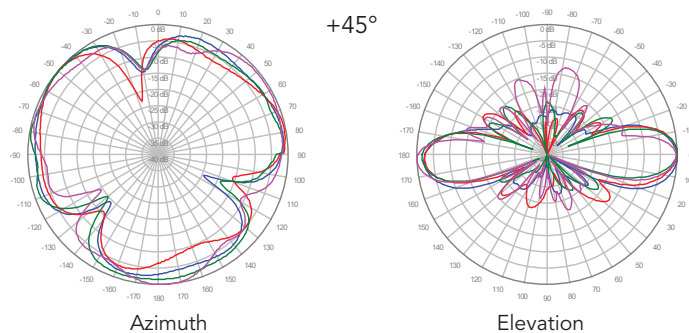


## 2U3MT360X06F<sub>xy</sub>s4





### ■ P1, 2° TILT

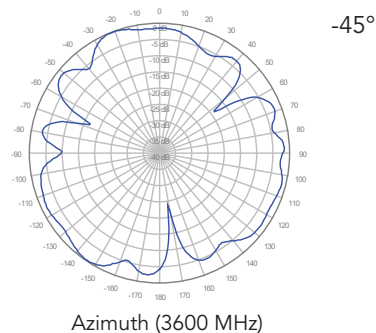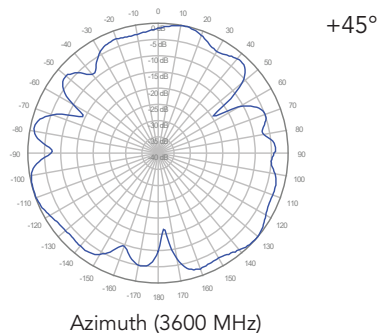

### ■ P2, 2° TILT

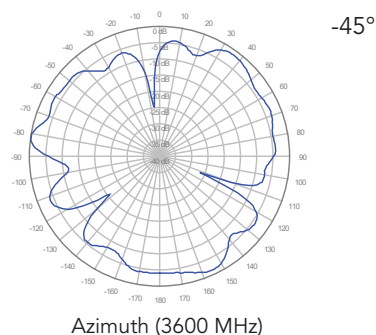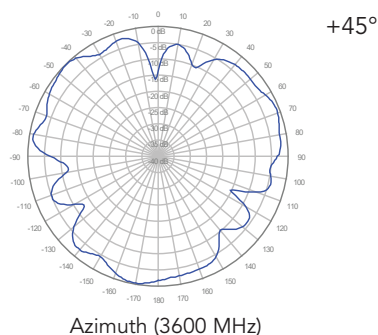

### ■ O1, 0° TILT

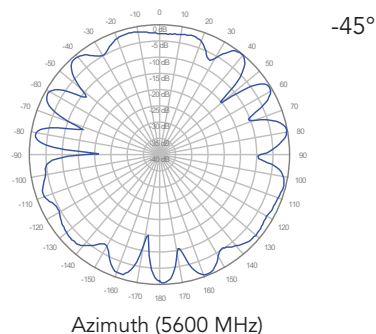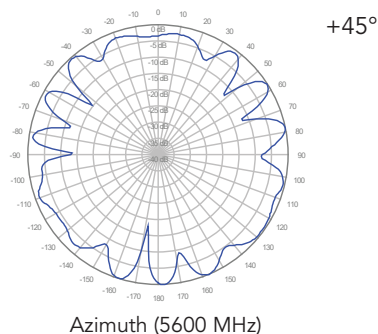

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.