


## 4C6U6VT360X12Fwxys5

### Features

- Pseudo omni configuration with 32 connectors
- Dual antennas integrated under a single radome
- Ideal for multi-carrier or 4x4 MIMO deployments
- Broadband networks 696-960, 1695-2700 and 3300-4200 MHz
- Easily removable lifting ring
- Improvements in gain, port isolation and VSWR
- Available for order with a grey, brown or black radome

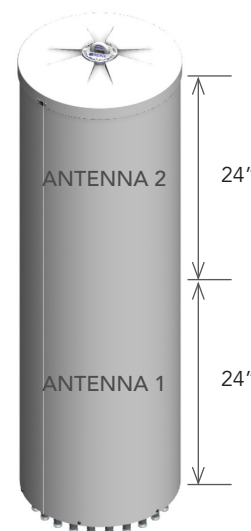

PRODUCT OVERVIEW	Frequency Range (MHz)	(4x) 696-960	(6x) 1695-2700	(6x) 3300-4200
	Array	<div style="display: flex; justify-content: space-around;"> <span>■ R1</span> <span>■ R2</span> </div> <div style="display: flex; justify-content: space-around;"> <span>■ R3</span> <span>■ R4</span> </div>	<div style="display: flex; justify-content: space-around;"> <span>■ Y1</span> <span>■ Y2</span> <span>■ Y3</span> </div> <div style="display: flex; justify-content: space-around;"> <span>■ Y4</span> <span>■ Y5</span> <span>■ Y6</span> </div>	<div style="display: flex; justify-content: space-around;"> <span>■ P1</span> <span>■ P2</span> <span>■ P3</span> </div> <div style="display: flex; justify-content: space-around;"> <span>■ P4</span> <span>■ P5</span> <span>■ P6</span> </div>
	Connector	8 PORTS	12 PORTS	12 PORTS
	Polarization	XPOL	XPOL	XPOL
	Azimuth Beamwidth (avg)	360°	360°	360°
	Electrical Downtilt	0°	2°, 4°, 6°	2°, 4°, 6°
	Configuration	OMNI CONFIGURATION		
	Maximum Continuous Power Per Port @ 50° C (122° F)	500 WATTS	300 WATTS	100 WATTS
	Maximum Total Continuous Power at 50° C (122° F)	8800 WATTS		
	Connector Type	(32x) 4.3-10 FEMALE		
	Dimensions	1203 x Ø371 mm (47.4 x Ø14.6 in)		
	Radome Color Options	GREY, BROWN or BLACK		

### ELECTRICAL SPECIFICATIONS

■ R1 ■ R2 ■ R3 ■ R4

Frequency Range		MHz	(4x) 696-960	
Frequency Sub-Range		MHz	696-806	806-960
Polarization		---	(4x) ±45°	
Gain	BASTA	dBi	4.7 ± 0.9	4.3 ± 0.7
	MAX	dBi	5.6	5.0
Azimuth Beamwidth (3 dB)		degrees	360°	360°
Elevation Beamwidth (3 dB)		degrees	54.9° ± 15.5°	45.8° ± 9.6°
Electrical Downtilt		degrees	(w) 0°	
Impedance		Ohms	50Ω	
VSWR		---	≤ 1.5:1	
Passive Intermodulation 3rd Order for 2x20 W Carriers		dBc	< -153	
Upper Sidelobe Suppression		dB	N/A	N/A
Isolation	Intraband	dB	> 25	
	Interband	dB	> 28 same band; > 30 different band	

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 4C6U6VT360X12Fwxys5

### ELECTRICAL SPECIFICATIONS

Y1 Y2 Y3 Y4 Y5 Y6

Frequency Range	MHz	(6x) 1695-2700			
Frequency Sub-Range	MHz	1695-1880	1850-1990	1920-2200	2300-2700
Polarization	---	(6x) $\pm 45^\circ$			
Gain	BASTA	dBi	$7.6 \pm 0.8$	$7.5 \pm 0.7$	$7.4 \pm 0.9$
	MAX	dBi	8.4	8.2	8.3
Azimuth Beamwidth (3 dB)	degrees	360°	360°	360°	360°
Elevation Beamwidth (3 dB)	degrees	$23.0^\circ \pm 3.2^\circ$	$20.8^\circ \pm 2.7^\circ$	$19.0^\circ \pm 3.5^\circ$	$16.9^\circ \pm 2.6^\circ$
Electrical Downtilt	degrees	(x) 2°, 4°, 6°			
Impedance	Ohms	50Ω			
VSWR	---	$\leq 1.5:1$			
Passive Intermodulation 3rd Order for 2x20 W Carriers	dBc	< -153			
Upper Sidelobe Suppression	dB	N/A			
Isolation	Intraband	dB	> 25		
	Interband	dB	> 28 same band; > 30 different band		

### ELECTRICAL SPECIFICATIONS

P1 P2 P3 P4 P5 P6


Frequency Range		MHz	(6x) 3300-4200		
Frequency Sub-Range		MHz	3300-3550	3550-3700	3700-4200
Polarization		---	(6x) ±45°		
Gain	BASTA	dBi	8.1 ± 1.0	8.7 ± 0.9	9.1 ± 0.9
	MAX	dBi	9.1	9.6	10.0
Azimuth Beamwidth (3 dB)		degrees	360°	360°	360°
Elevation Beamwidth (3 dB)		degrees	16.9° ± 1.6°	16.5° ± 1.7°	16.3° ± 2.1°
Electrical Downtilt		degrees	(y) 2°, 4°, 6°		
Impedance		Ohms	50Ω		
VSWR		---	≤ 1.5:1		
Passive Intermodulation 3rd Order for 2x20 W Carriers		dBc	< -153		
Upper Sidelobe Suppression		dB	N/A		
Isolation	Intraband	dB	> 25		
	Interband	dB	> 28 same band; > 30 different band		

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 4C6U6VT360X12Fwxys5

### MECHANICAL SPECIFICATIONS


Antenna	Height	mm (in)	1203 (47.4)
	Diameter	mm (in)	371 (14.6)
Net Weight - Antenna Only		kg (lbs)	20.9 (46.0)
Windload	Calculation	km/h (mph)	160 (100)
	Frontal	N (lbf)	391 (88)
Survival Wind Speed		km/h (mph)	241 (150)
Wind Area		m <sup>2</sup> (ft <sup>2</sup> )	0.47 (5.0)
Volume	Total	m <sup>3</sup> (ft <sup>3</sup> )	0.13 (4.7)
	Each Antenna	m <sup>3</sup> (ft <sup>3</sup> )	0.065 (2.33)
Connector	Type	---	(32x) 4.3-10 Female
	Position	---	Bottom
Radome Color		---	Grey (Pantone 420 C) Brown (Pantone 476 C) Black (RAL 9011)
Lightning Protection (Grounding Type)		---	Direct Ground

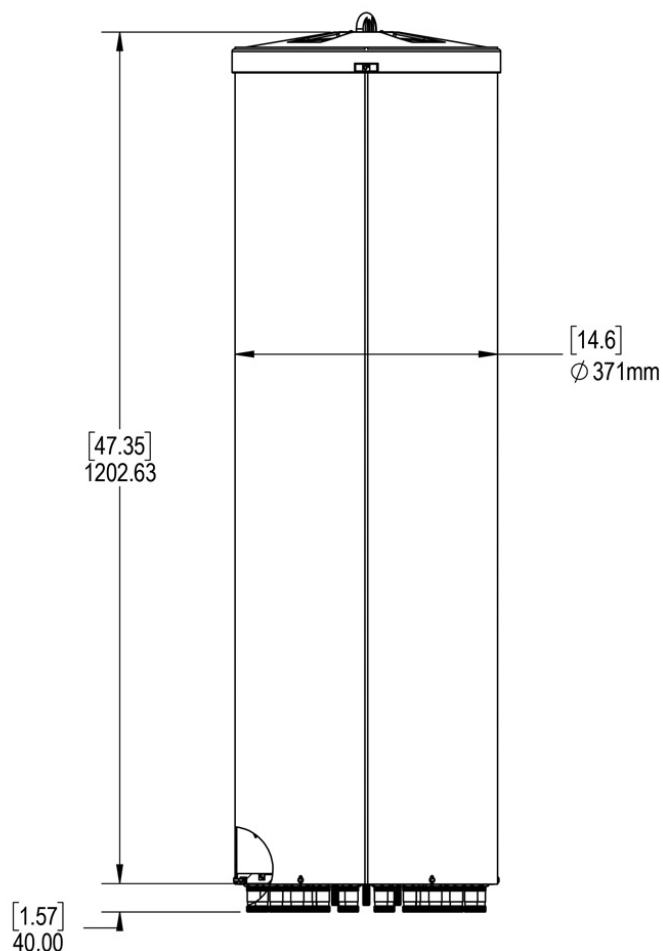

## 4C6U6VT360X12Fwxys5

### ARRAY LAYOUT Topology


FREQUENCY	ARRAY	CONNECTOR	CONNECTOR TYPE
696-960 MHz	<span style="color: red;">■</span> R1	25-26	(2x) 4.3-10 Female
696-960 MHz	<span style="color: red;">■</span> R2	27-28	(2x) 4.3-10 Female
696-960 MHz	<span style="color: red;">■</span> R3	29-30	(2x) 4.3-10 Female
696-960 MHz	<span style="color: red;">■</span> R4	31-32	(2x) 4.3-10 Female
1695-2700 MHz	<span style="color: yellow;">■</span> Y1	1-2	(2x) 4.3-10 Female
1695-2700 MHz	<span style="color: yellow;">■</span> Y2	5-6	(2x) 4.3-10 Female
1695-2700 MHz	<span style="color: yellow;">■</span> Y3	9-10	(2x) 4.3-10 Female
1695-2700 MHz	<span style="color: yellow;">■</span> Y4	13-14	(2x) 4.3-10 Female
1695-2700 MHz	<span style="color: yellow;">■</span> Y5	17-18	(2x) 4.3-10 Female
1695-2700 MHz	<span style="color: yellow;">■</span> Y6	21-22	(2x) 4.3-10 Female
3300-4200 MHz	<span style="color: purple;">■</span> P1	3-4	(2x) 4.3-10 Female
3300-4200 MHz	<span style="color: purple;">■</span> P2	7-8	(2x) 4.3-10 Female
3300-4200 MHz	<span style="color: purple;">■</span> P3	11-12	(2x) 4.3-10 Female
3300-4200 MHz	<span style="color: purple;">■</span> P4	15-16	(2x) 4.3-10 Female
3300-4200 MHz	<span style="color: purple;">■</span> P5	19-20	(2x) 4.3-10 Female
3300-4200 MHz	<span style="color: purple;">■</span> P6	23-24	(2x) 4.3-10 Female

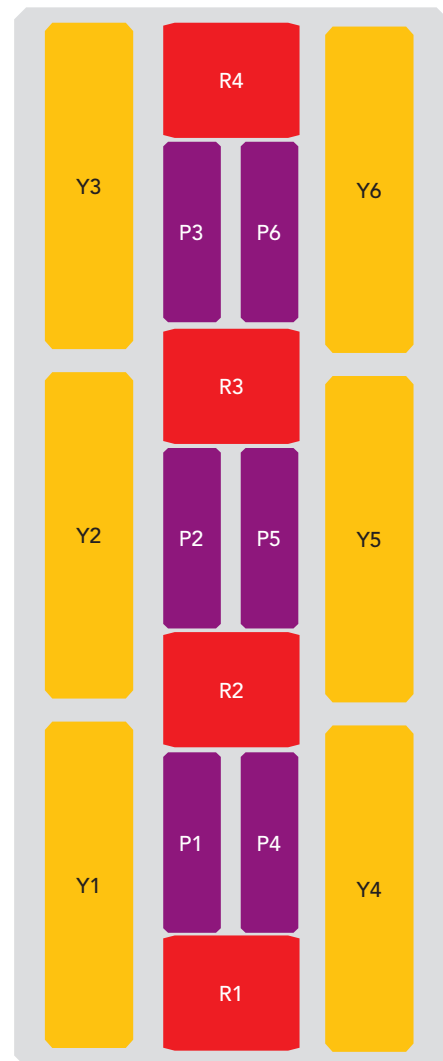

The illustration is not shown to scale.

4C6U6VT360X12Fwxys5


## BOTTOM VIEW - LABELING

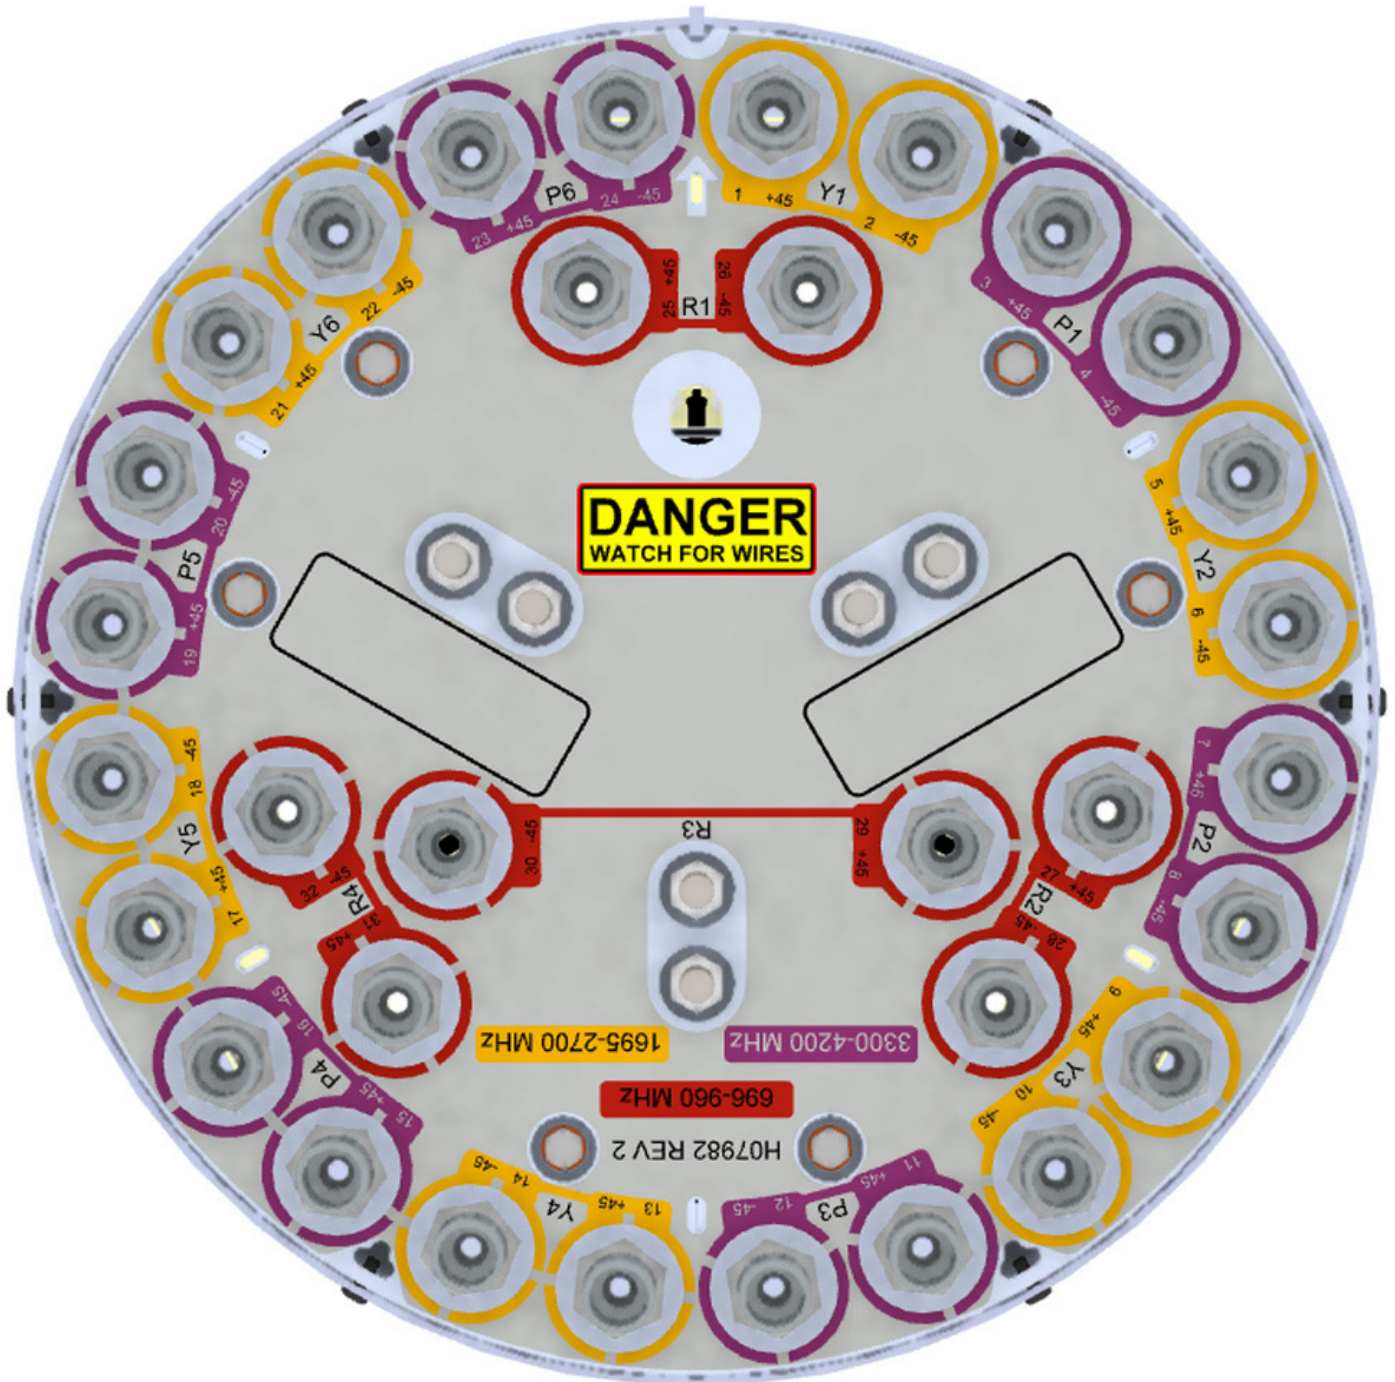



## 4C6U6VT360X12Fwxys5

### BOTTOM VIEW - CONNECTOR DIAGRAM

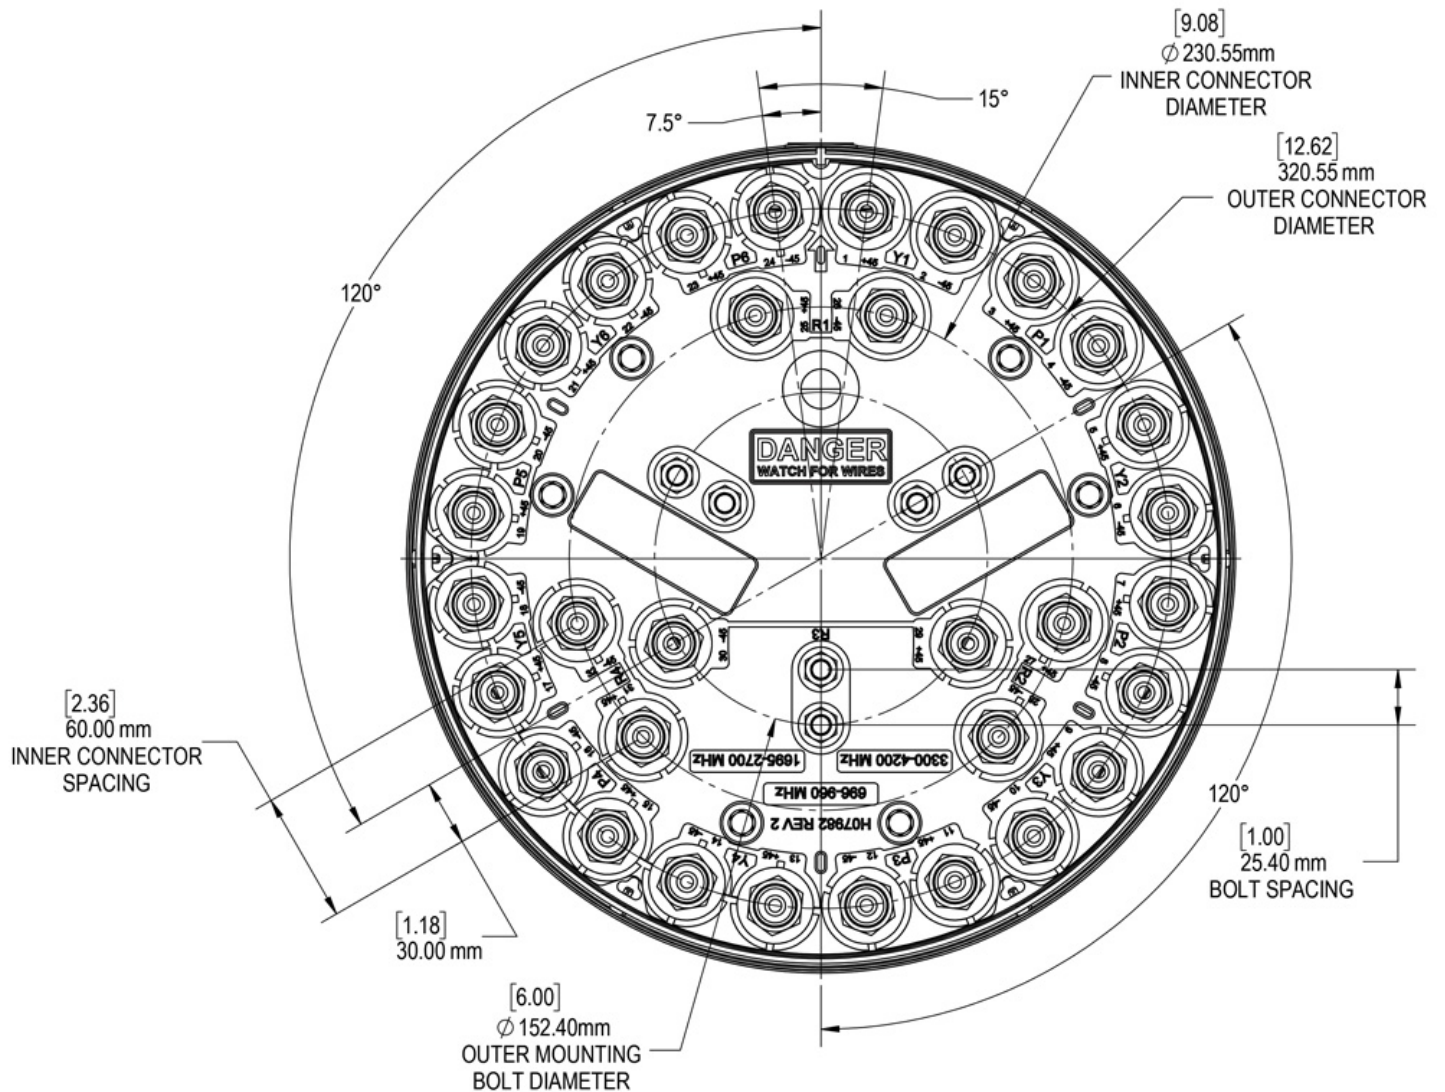

## 4C6U6VT360X12Fwxys5

**MOUNTING KITS** Select from the following mounting options when ordering. Mounting kits for canister antennas are ordered as a separate line item.

MODEL NUMBER		DESCRIPTION
CWT-MKS-SIDE		SIDE MOUNTING BRACKET KIT FOR CANISTER ANTENNA
CWT-MKS-TOP		TOP MOUNTING BRACKET KIT FOR CANISTER ANTENNA
WB3X-MKS-01		UTILITY POLE MOUNTING BRACKET KIT FOR CANISTER ANTENNA
CWT-MKS-BASE-xx		WIDE DIAMETER POLE TOP MOUNTING BRACKET KIT FOR CANISTER ANTENNA. AVAILABLE IN BROWN, BLACK AND GREY TO MATCH ANTENNA RADOME AND/OR MOUNTING STRUCTURE.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

4C6U6VT360X12Fwxy<sup>s</sup>5

HOW TO READ THE MODEL NUMBER Each letter and number has meaning.

NUMBER OF BANDS & OPERATING FREQUENCY			PATTERN TYPE	AZIMUTH BMWIDTH	POLARIZATION	LENGTH	TILT TYPE	TILT OPTIONS	CONNECTOR TYPE	VARIATION	RADOME COLOR OPTIONS
4C	6U	6V	T	360	X	12	F	wxy	s	5	BK BR
(4x) 696-960	(6x) 1695-2700	(6x) 3300-4200	Tri-Sector	360°	XPOL	1.2 meters	Fixed Tilt	These letters are placeholders for fixed tilt options.  Refer to Electrical Specifications for available tilt options.	4.3-10 Connector	Variations of similar antennas may exist.  Please refer to data sheets for specific differences.	BK indicates a Black radome.  BR indicates a Brown radome.  The default radome color is Grey.  No letters are required for a Grey radome.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.



## 4C6U6VT360X12Fwxys5

### ORDERING OPTIONS Select from the following ordering options


SELECT RADOME COLOR	SELECT DEGREE OF ELECTRICAL DOWNTILT FOR EACH BAND			ANTENNA MODEL
	696-960 MHz	1695-2700 MHz	3300-4200 MHz	
Grey Pantone 420 C	0°	2°	2°	4C6U6VT360X12F022s5
	0°	2°	4°	4C6U6VT360X12F024s5
	0°	2°	6°	4C6U6VT360X12F026s5
	0°	4°	2°	4C6U6VT360X12F042s5
	0°	4°	4°	4C6U6VT360X12F044s5
	0°	4°	6°	4C6U6VT360X12F046s5
	0°	6°	2°	4C6U6VT360X12F062s5
	0°	6°	4°	4C6U6VT360X12F064s5
	0°	6°	6°	4C6U6VT360X12F066s5
	0°	Y1 & Y2 = 6°; Y3-Y6 = 2°	2°	4C6U6VT360X12F0A2s5
	0°	Y1 & Y2 = 4°; Y3-Y6 = 2°	2°	4C6U6VT360X12F0B2s5
	0°	Y1 & Y2 = 6°; Y3-Y6 = 4°	2°	4C6U6VT360X12F0C2s5
Brown Pantone 476 C	0°	2°	2°	4C6U6VT360X12F022s5BR
	0°	2°	4°	4C6U6VT360X12F024s5BR
	0°	2°	6°	4C6U6VT360X12F026s5BR
	0°	4°	2°	4C6U6VT360X12F042s5BR
	0°	4°	4°	4C6U6VT360X12F044s5BR
	0°	4°	6°	4C6U6VT360X12F046s5BR
	0°	6°	2°	4C6U6VT360X12F062s5BR
	0°	6°	4°	4C6U6VT360X12F064s5BR
	0°	6°	6°	4C6U6VT360X12F066s5BR
	0°	Y1 & Y2 = 6°; Y3-Y6 = 2°	2°	4C6U6VT360X12F0A2s5BR
	0°	Y1 & Y2 = 4°; Y3-Y6 = 2°	2°	4C6U6VT360X12F0B2s5BR
	0°	Y1 & Y2 = 6°; Y3-Y6 = 4°	2°	4C6U6VT360X12F0C2s5BR
Black RAL 9011	0°	2°	2°	4C6U6VT360X12F022s5BK
	0°	2°	4°	4C6U6VT360X12F024s5BK
	0°	2°	6°	4C6U6VT360X12F026s5BK
	0°	4°	2°	4C6U6VT360X12F042s5BK
	0°	4°	4°	4C6U6VT360X12F044s5BK
	0°	4°	6°	4C6U6VT360X12F046s5BK
	0°	6°	2°	4C6U6VT360X12F062s5BK
	0°	6°	4°	4C6U6VT360X12F064s5BK
	0°	6°	6°	4C6U6VT360X12F066s5BK
	0°	Y1 & Y2 = 6°; Y3-Y6 = 2°	2°	4C6U6VT360X12F0A2s5BK
	0°	Y1 & Y2 = 4°; Y3-Y6 = 2°	2°	4C6U6VT360X12F0B2s5BK
	0°	Y1 & Y2 = 6°; Y3-Y6 = 4°	2°	4C6U6VT360X12F0C2s5BK

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


4C6U6VT360X12Fwxys5

750 MHz ————  
850 MHz ————


■ R1, 0° TILT

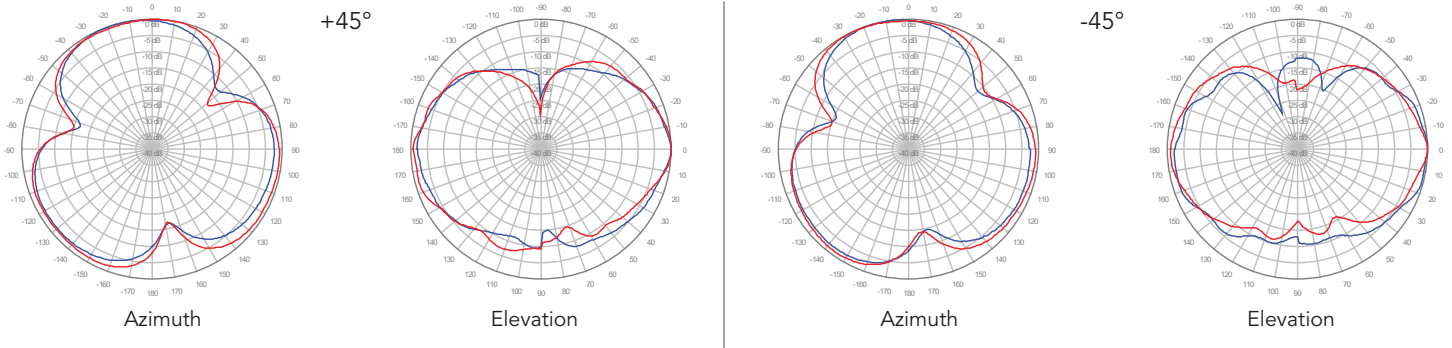


■ R2, 0° TILT

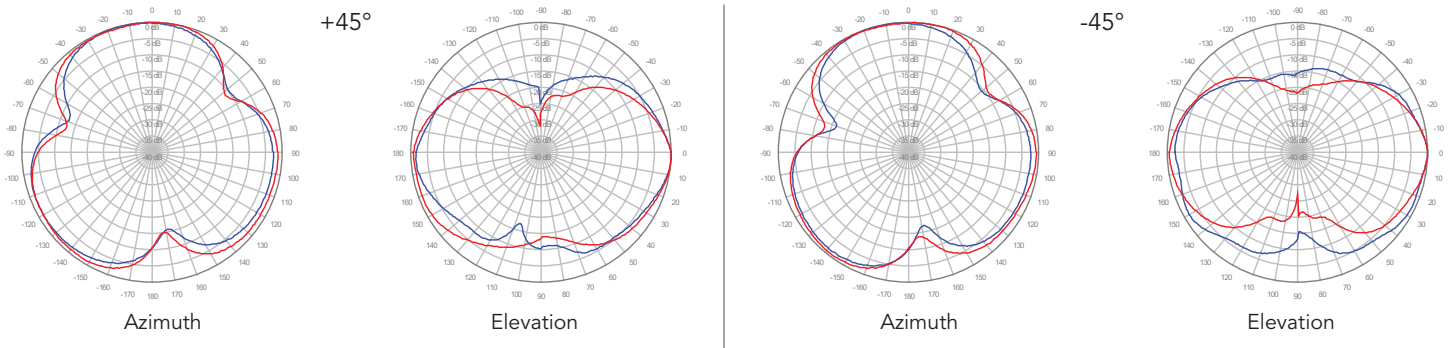

■ R3, 0° TILT

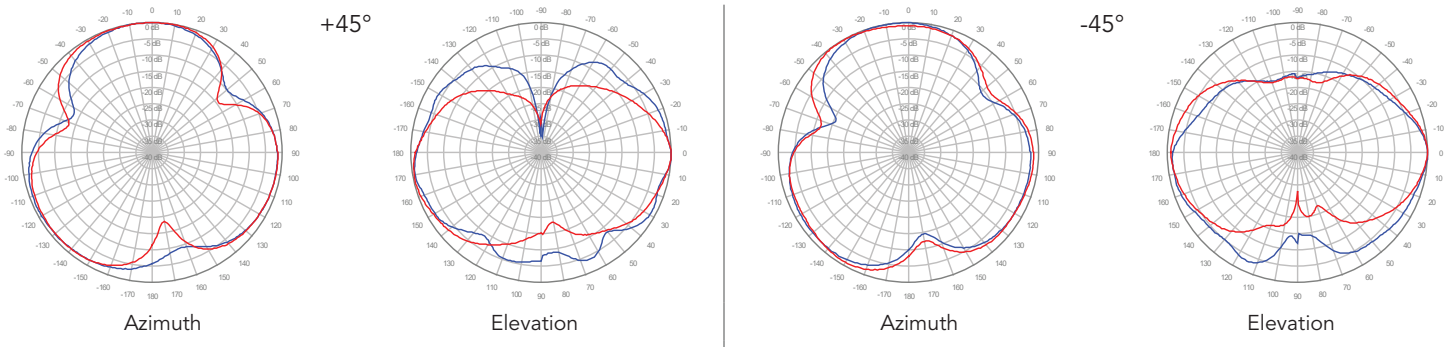

■ R4, 0° TILT

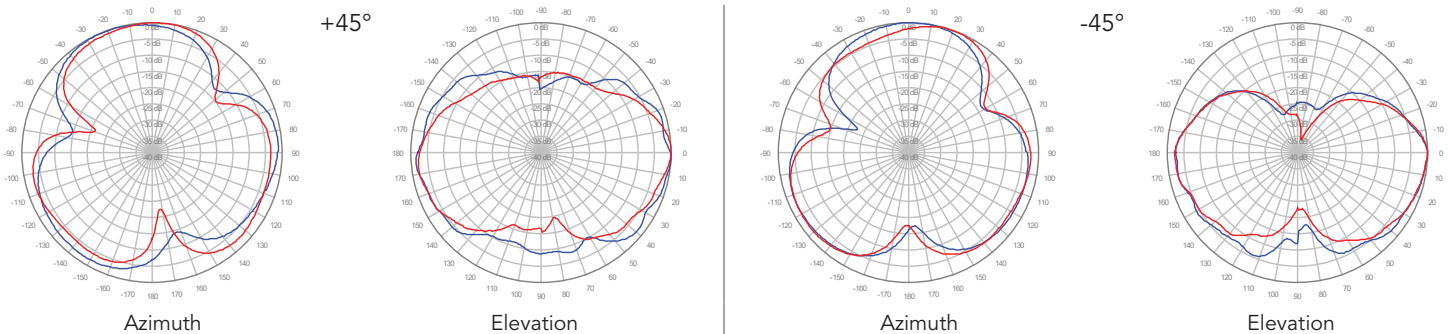


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


## 4C6U6VT360X12Fwxys5

1800 MHz —  
1900 MHz —  
2100 MHz —  
2300 MHz —  
2600 MHz —


### Y1, 2° TILT

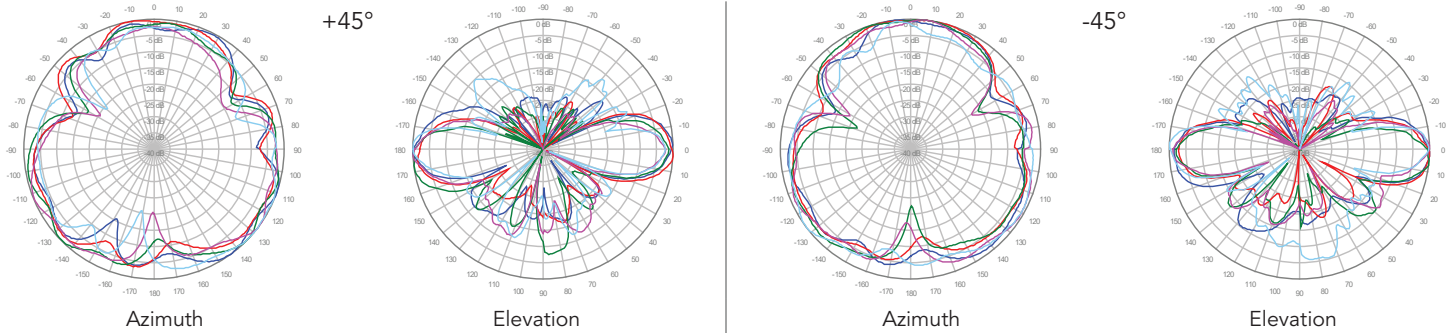


### Y2, 2° TILT

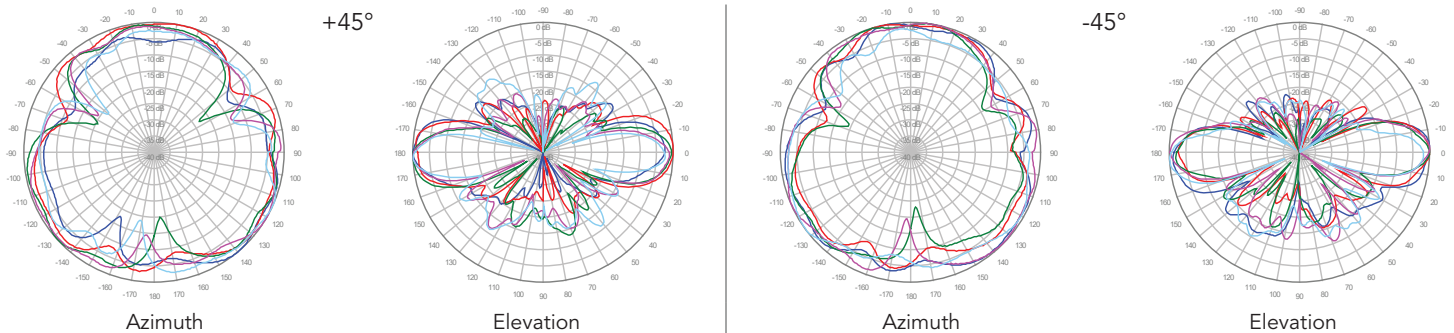

### Y3, 2° TILT

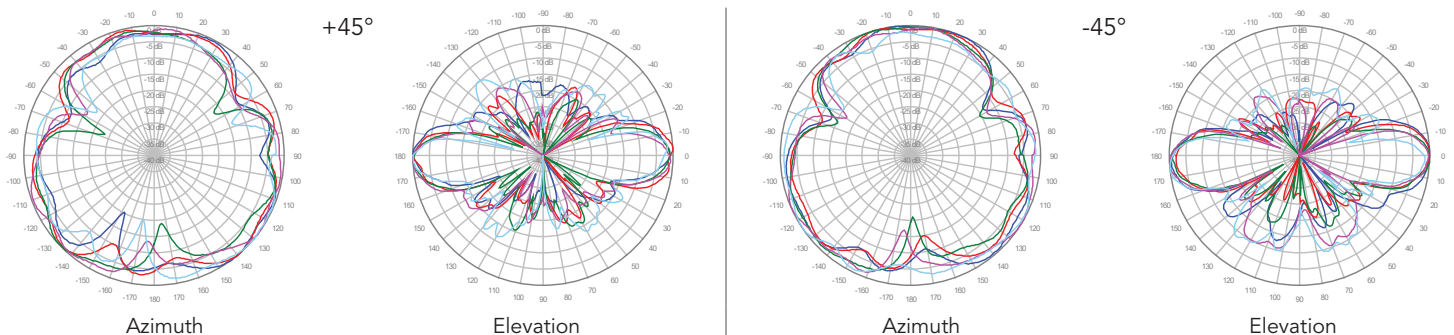

### Y4, 2° TILT

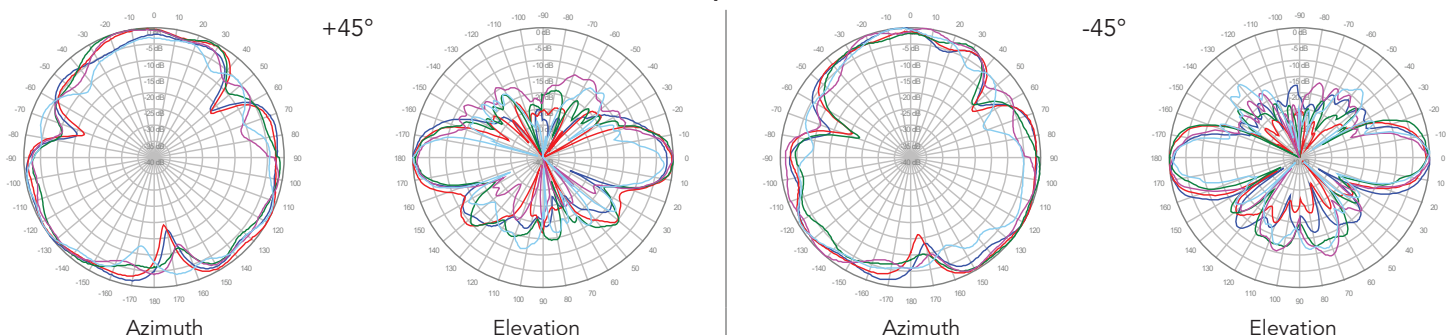

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

OMNI



47.4 IN

FIXED TILT



## 4C6U6VT360X12Fwxys5

1800 MHz —  
1900 MHz —  
2100 MHz —  
2300 MHz —  
2600 MHz —

■ Y5, 2° TILT

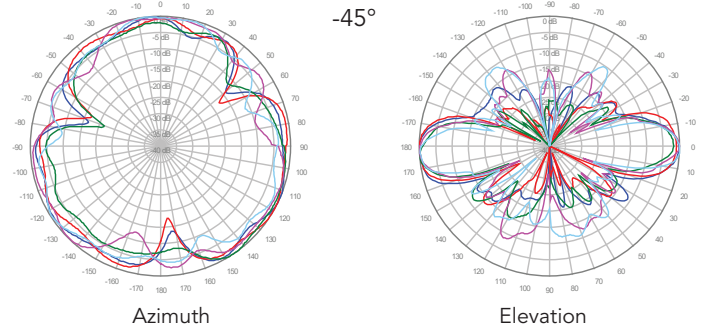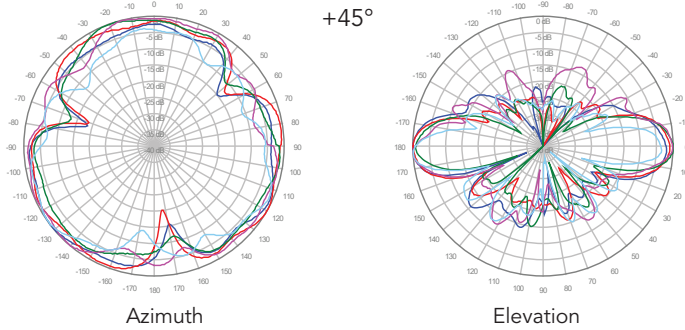

■ Y6, 2° TILT

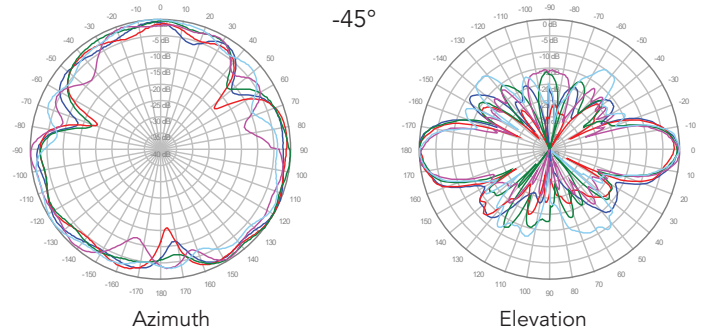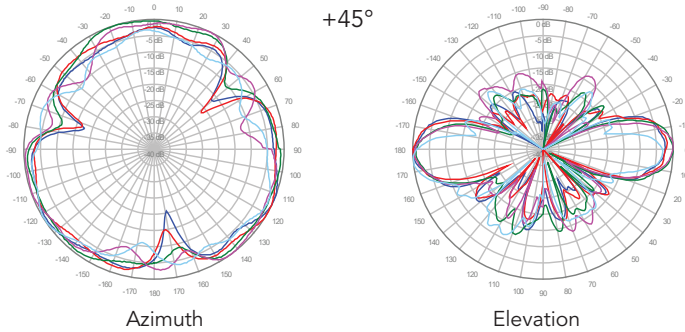





## 4C6U6VT360X12Fwxys5

1800 MHz —  
1900 MHz —  
2100 MHz —  
2300 MHz —  
2600 MHz —


### Y1, 4° TILT

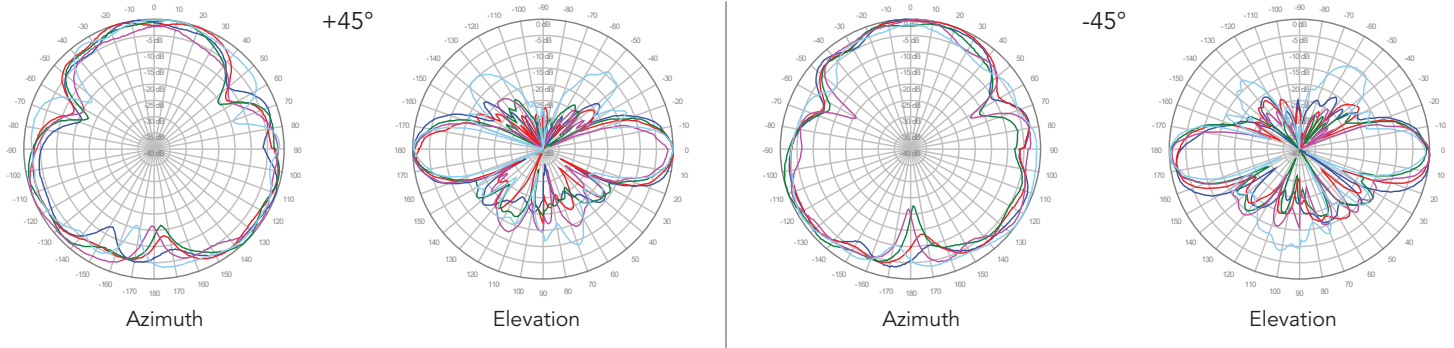


### Y2, 4° TILT

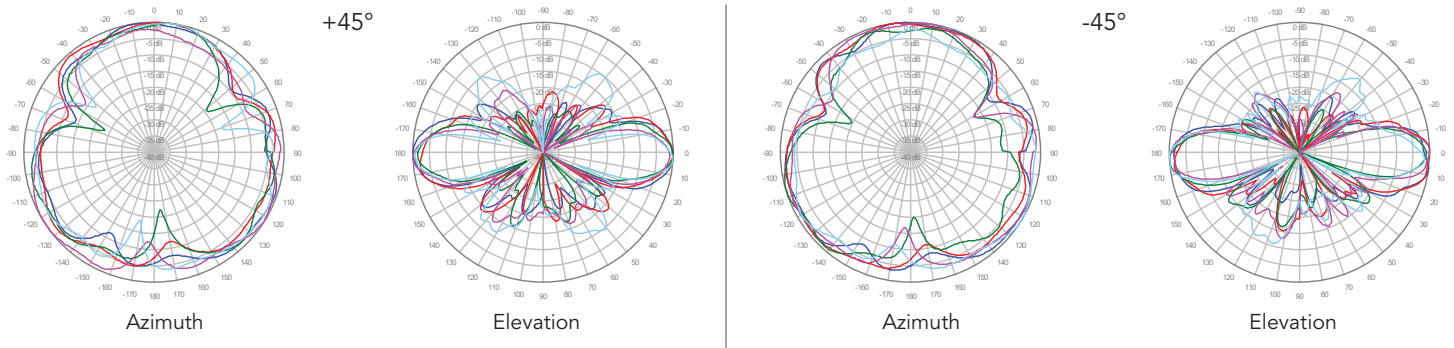

### Y3, 4° TILT

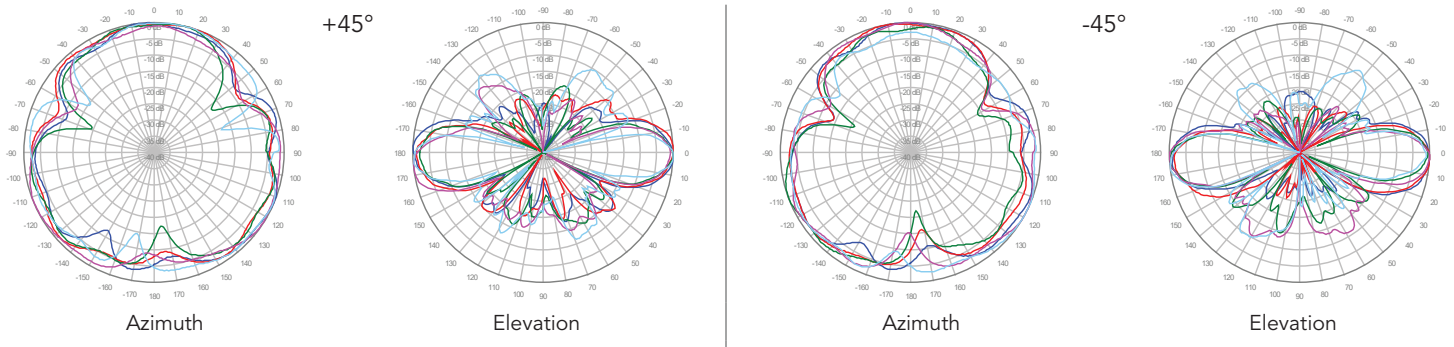

### Y4, 4° TILT

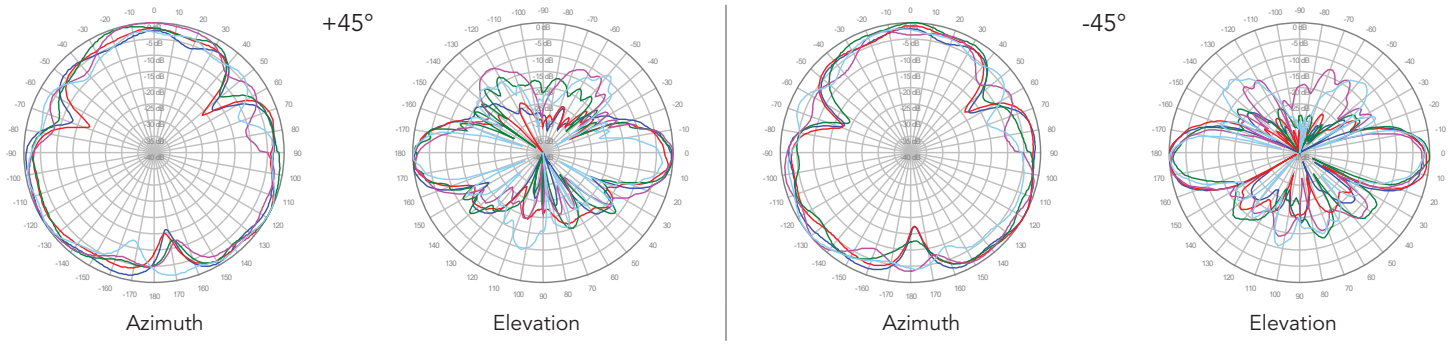

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

OMNI



47.4 IN

FIXED TILT



## 4C6U6VT360X12Fwxys5

1800 MHz —  
1900 MHz —  
2100 MHz —  
2300 MHz —  
2600 MHz —

■ Y5, 4° TILT

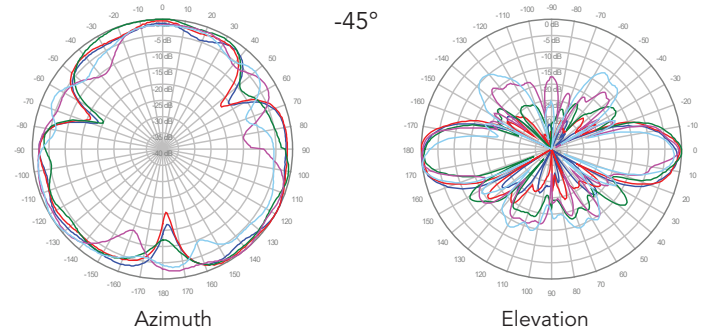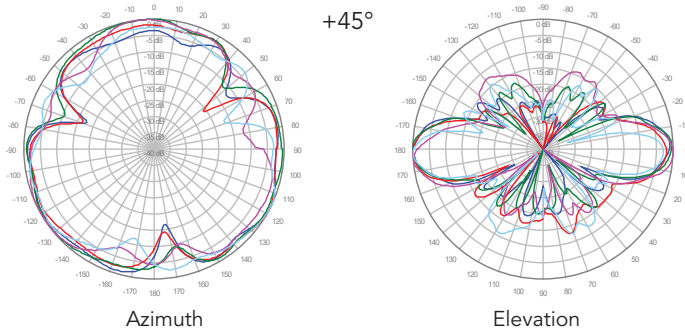

■ Y6, 4° TILT

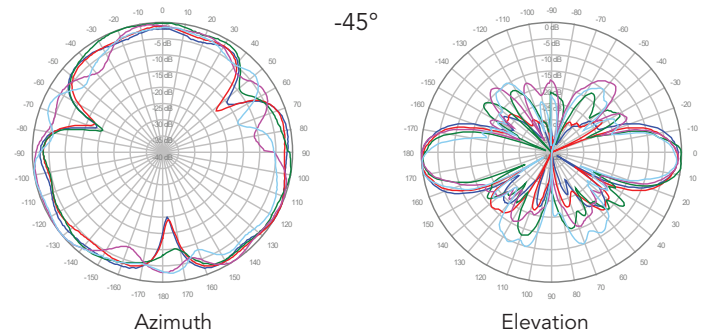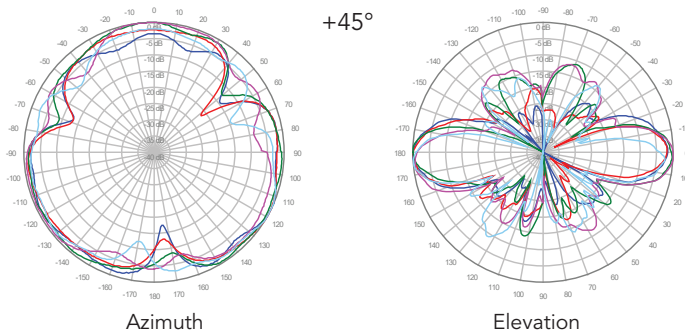





## 4C6U6VT360X12Fwxys5

1800 MHz —  
1900 MHz —  
2100 MHz —  
2300 MHz —  
2600 MHz —


■ Y1, 6° TILT

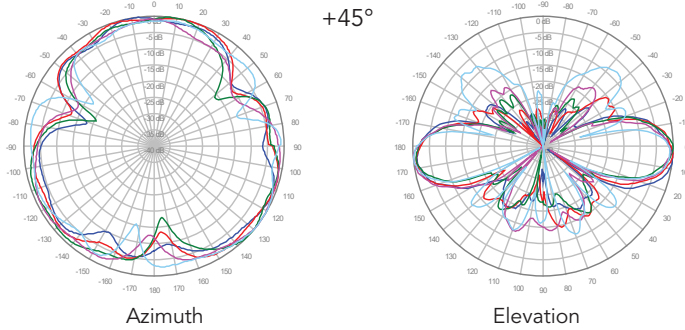


■ Y2, 6° TILT

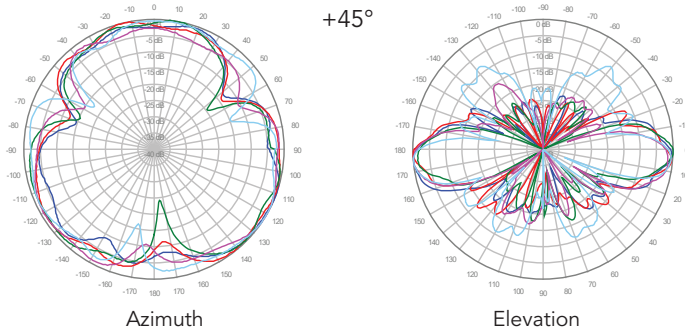

■ Y3, 6° TILT

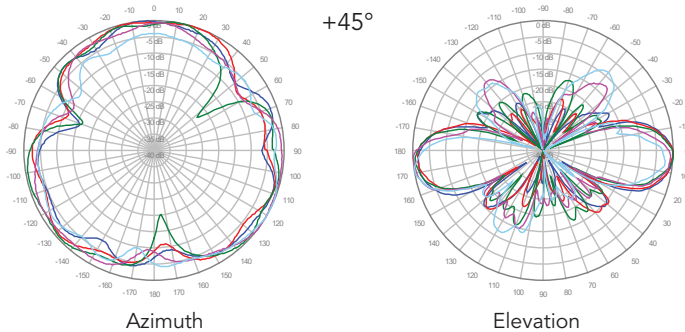

■ Y4, 6° TILT

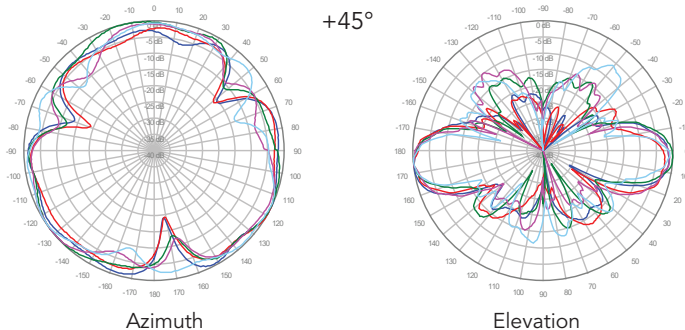

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

OMNI



47.4 IN

FIXED TILT



## 4C6U6VT360X12Fwxys5

1800 MHz —  
1900 MHz —  
2100 MHz —  
2300 MHz —  
2600 MHz —

■ Y5, 6° TILT

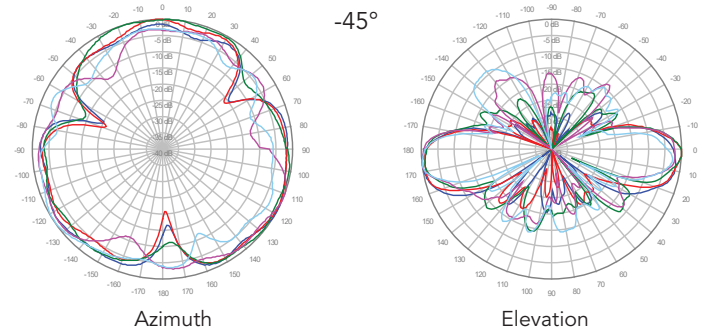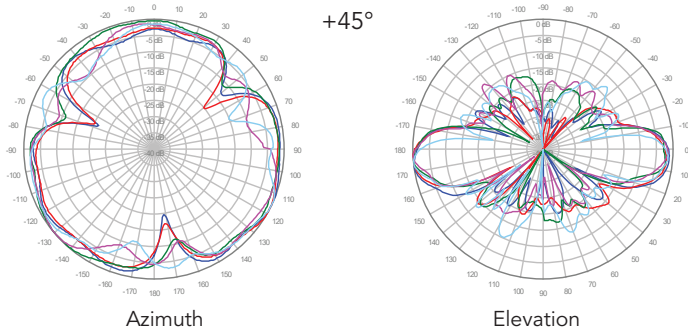


■ Y6, 6° TILT

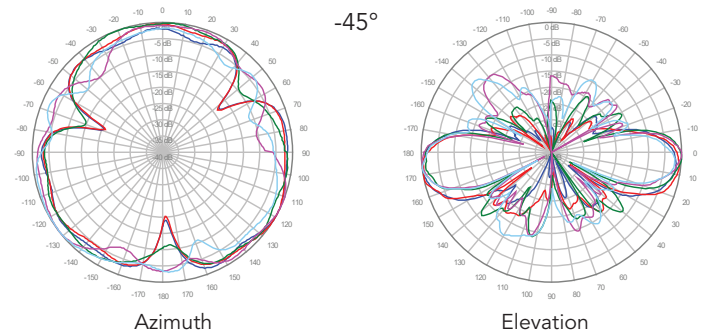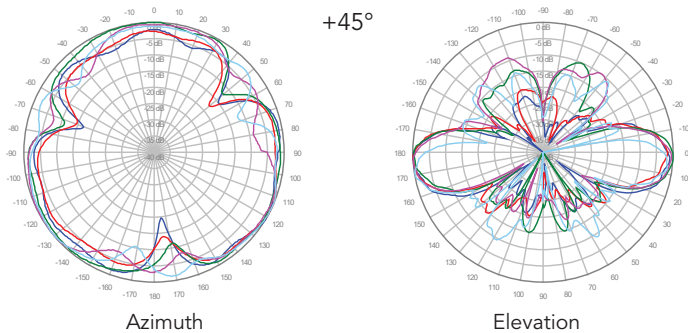


4C6U6VT360X12Fwxys5

3600 MHz ————  
4000 MHz ————


**P1, 2° TILT**

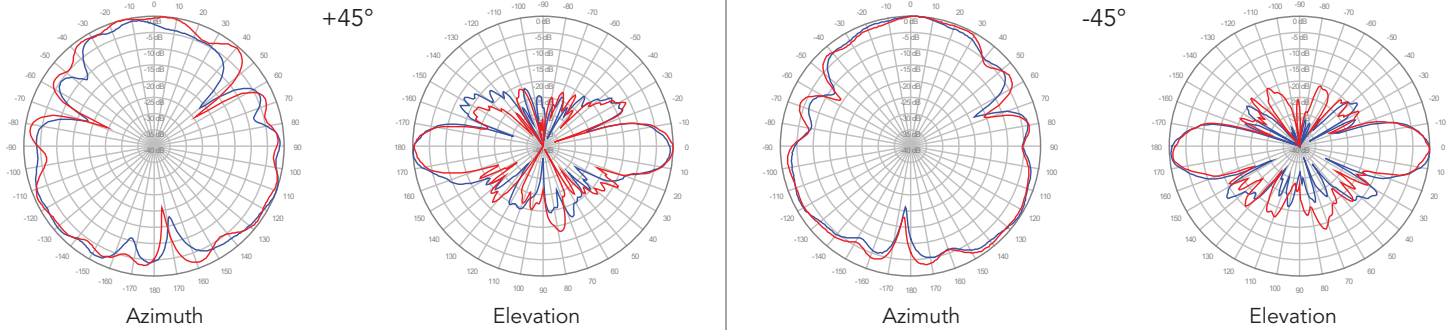


**P2, 2° TILT**

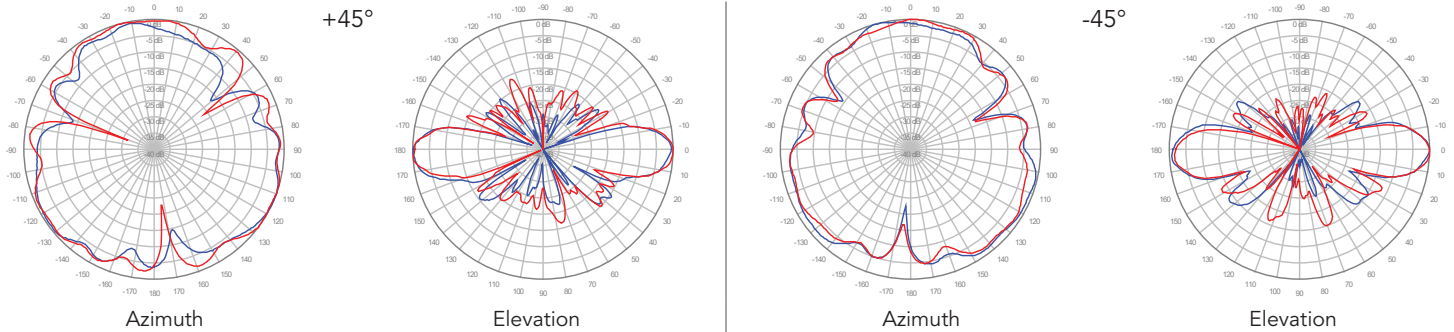

**P3, 2° TILT**

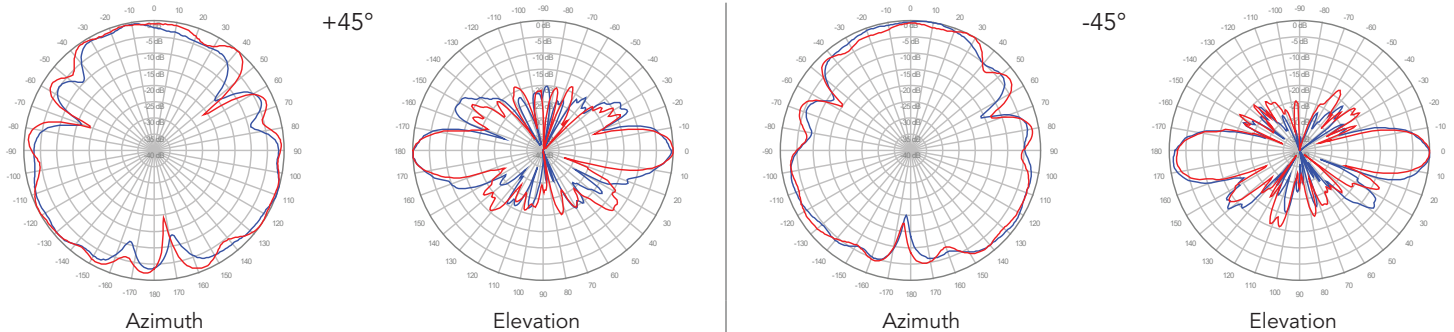

**P4, 2° TILT**

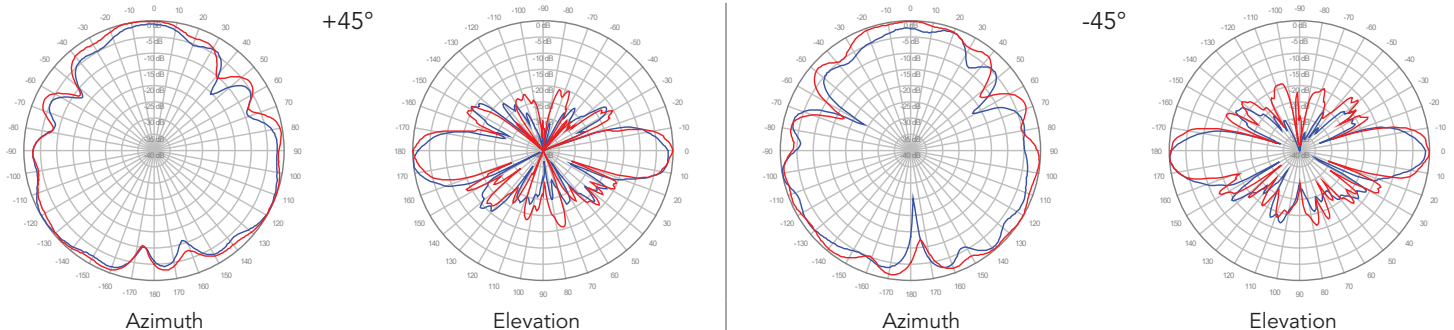

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.



OMNI





47.4 IN

FIXED TILT





4C6U6VT360X12Fwxys5

3600 MHz ————  
4000 MHz ————

■ P5, 2° TILT

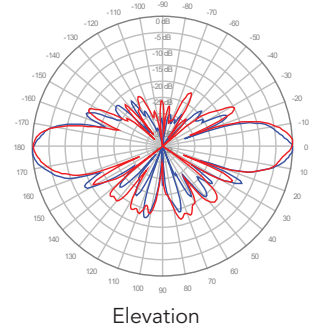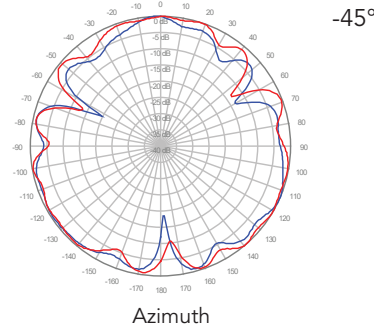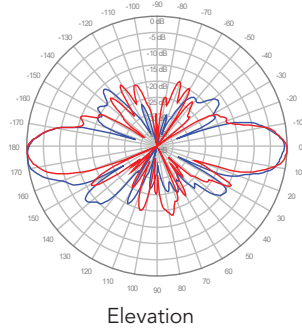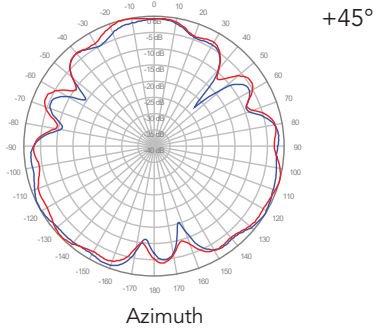


■ P6, 2° TILT

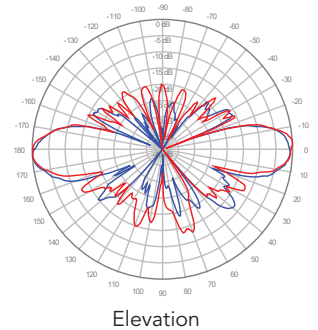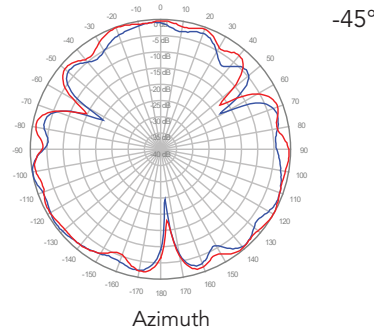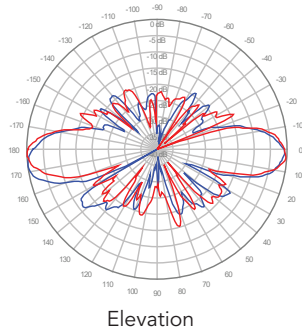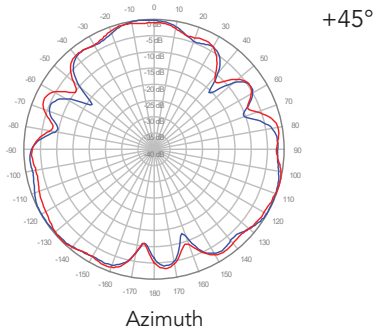


4C6U6VT360X12Fwxys5

3600 MHz ————  
4000 MHz ————


**P1, 4° TILT**

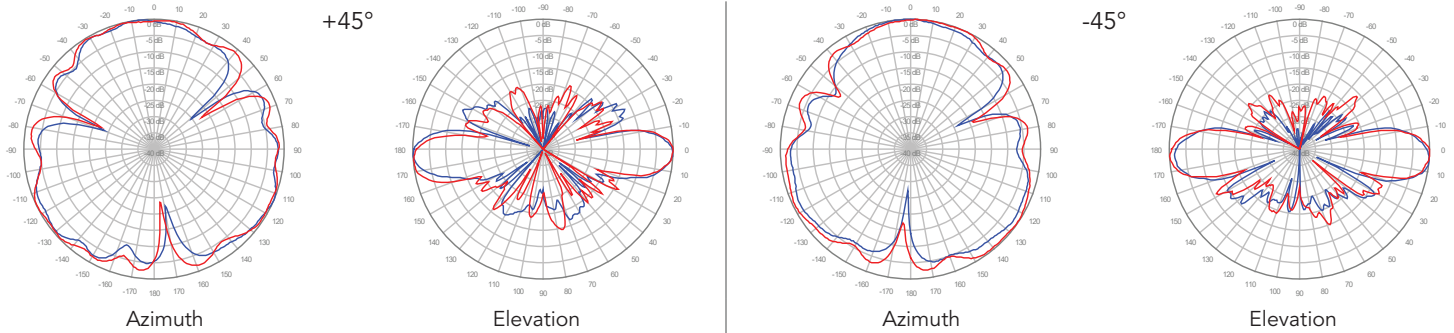


**P2, 4° TILT**

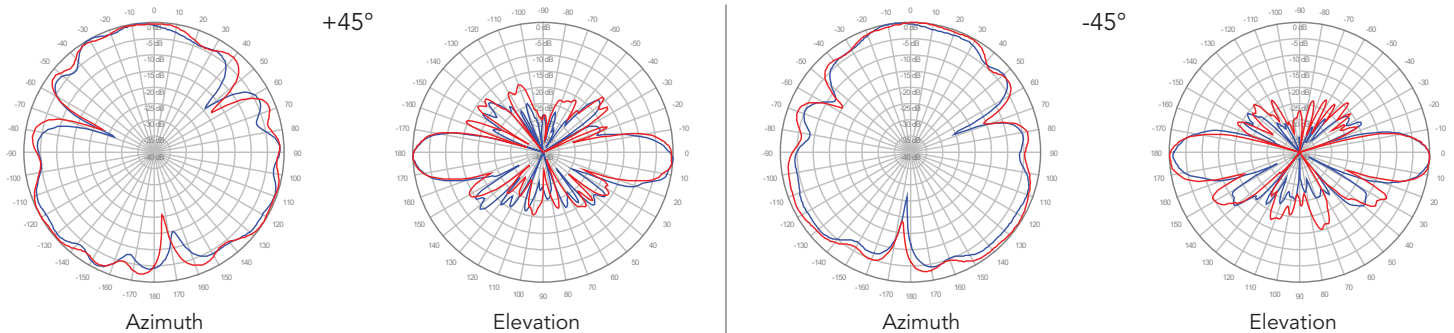

**P3, 4° TILT**

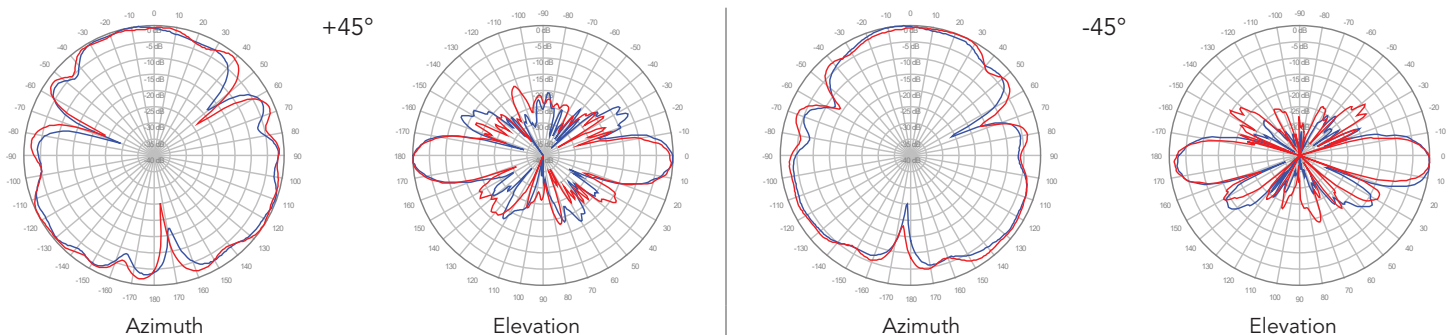

**P4, 4° TILT**


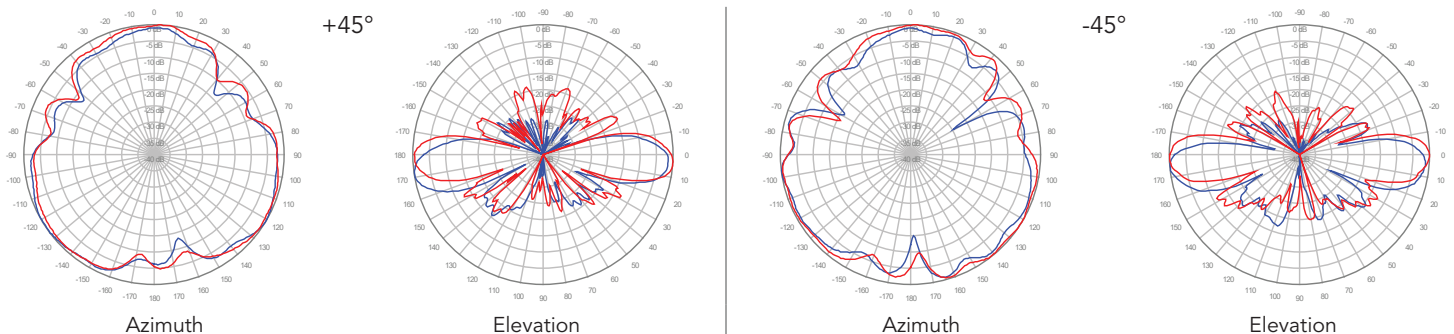


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.



4C6U6VT360X12Fwxys5

3600 MHz ————  
4000 MHz ————

■ P5, 4° TILT

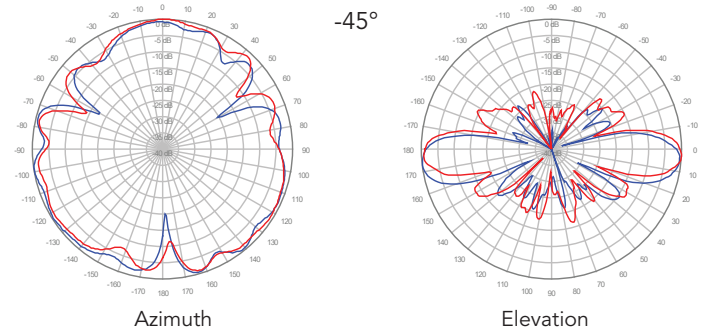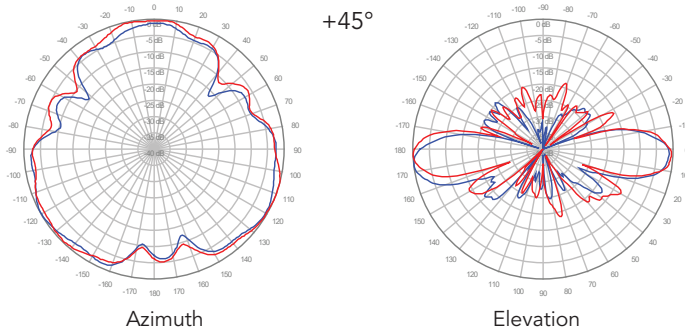

■ P6, 4° TILT

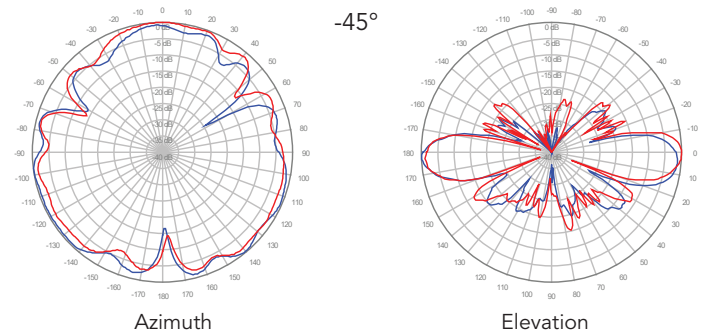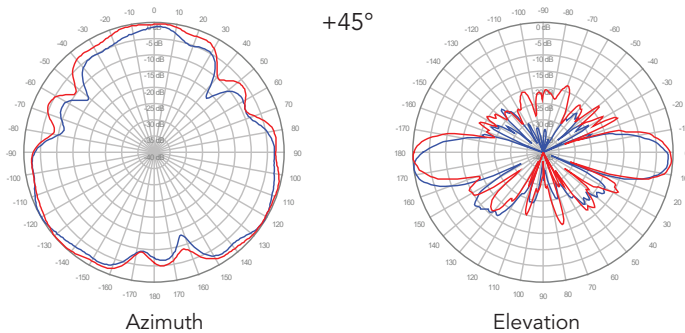





4C6U6VT360X12Fwxys5

3600 MHz ————  
4000 MHz ————


■ P1, 6° TILT

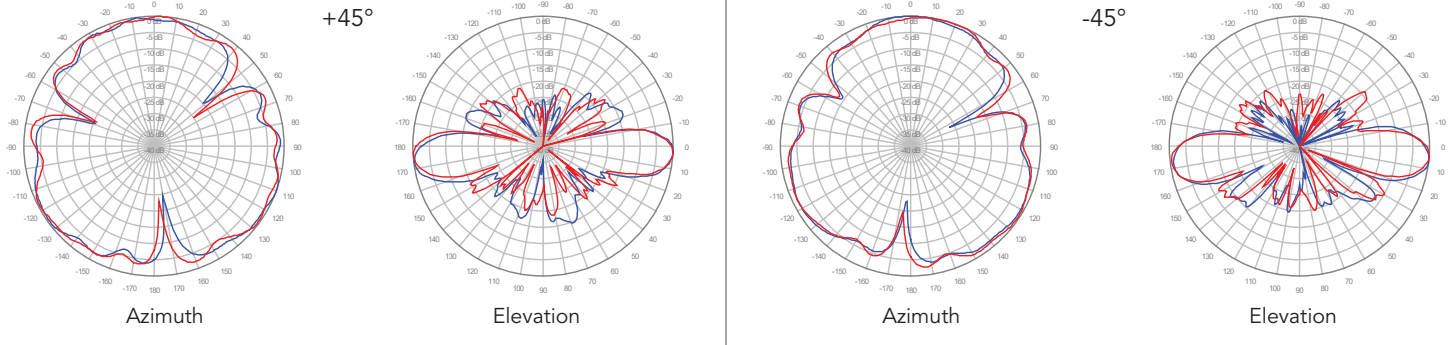


■ P2, 6° TILT

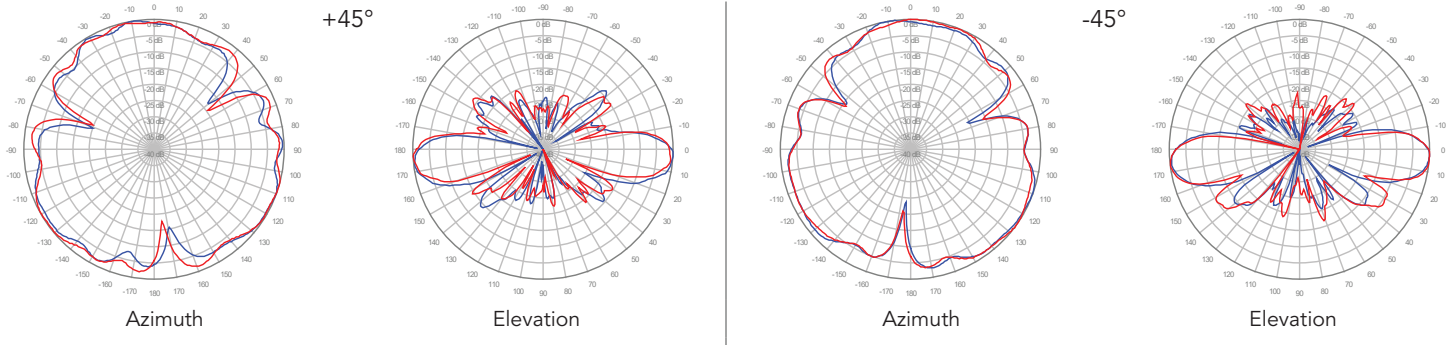

■ P3, 6° TILT

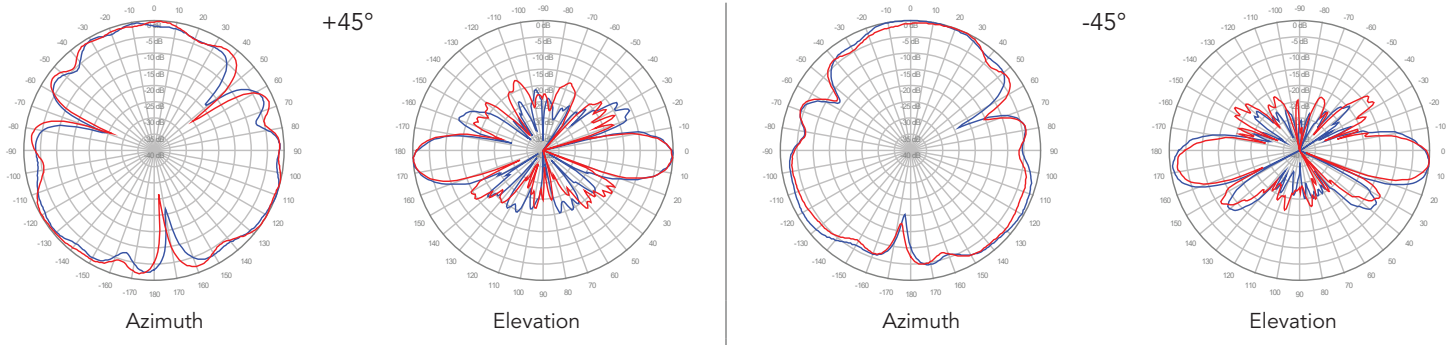

■ P4, 6° TILT




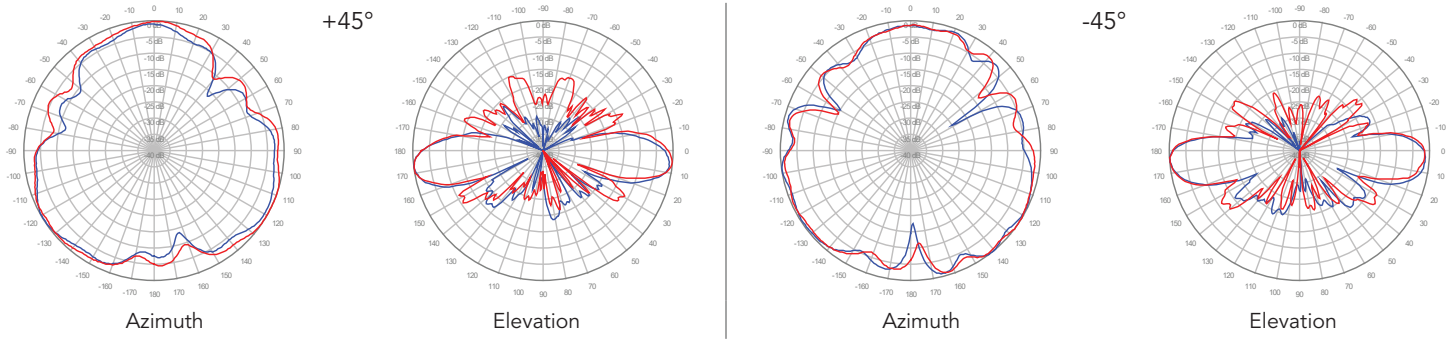


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

4C6U6VT360X12Fwxys5

3600 MHz ————  
4000 MHz ————

**P5, 6° TILT**

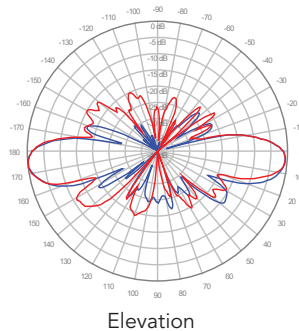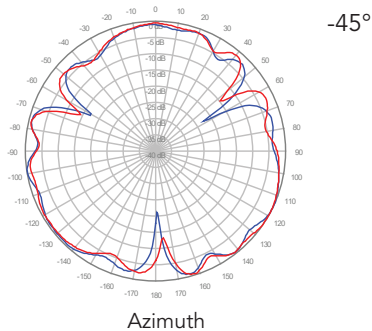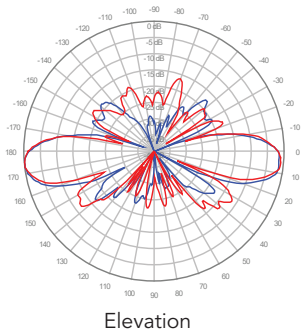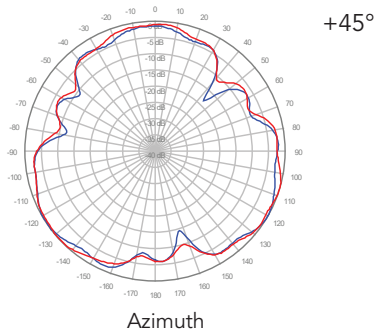

**P6, 6° TILT**

