

## 4C6U6VX065X12Fwxyz5

### Features

- Unique high port count panel antenna for 4G/5G small cell applications
- 32 total connectors to service the 696-960, 1695-2700 and 3300-4200 MHz bands
- Ideal for multi-carrier or 4x4 MIMO deployments
- Fixed tilt options



PRODUCT OVERVIEW	Frequency Range (MHz)	(4x) 696-960	(6x) 1695-2700	(6x) 3300-4200
	Array	<span style="color:red">■</span> R1, <span style="color:red">■</span> R2 <span style="color:red">■</span> R3, <span style="color:red">■</span> R4	<span style="color:yellow">■</span> Y1, <span style="color:yellow">■</span> Y2, <span style="color:yellow">■</span> Y3 <span style="color:yellow">■</span> Y4, <span style="color:yellow">■</span> Y5, <span style="color:yellow">■</span> Y6	<span style="color:purple">■</span> P1, <span style="color:purple">■</span> P2, <span style="color:purple">■</span> P3 <span style="color:purple">■</span> P4, <span style="color:purple">■</span> P5, <span style="color:purple">■</span> P6
	Connector	8 PORTS	12 PORTS	12 PORTS
	Polarization	XPOL	XPOL	XPOL
	Azimuth Beamwidth (avg)	65°	65°	65°
	Electrical Downtilt	0°	2°, 4°, 6°	2°, 4°, 6°
	Maximum Continuous Power Per Port @ 50° C (122° F)	200 WATTS	100 WATTS	100 WATTS
	Maximum Total Continuous Power at 50° C (122° F)	4000 WATTS		
	Total Connector Count	32 PORTS		
	Connector Type	4.3.-10 FEMALE	2.2-5 FEMALE	2.2-5 FEMALE
Dimensions	1219 x 527 x 222 mm (48.0 x 20.7 x 8.7)			
Radome Color Options	GREY			

### ELECTRICAL SPECIFICATIONS

■ R1 ■ R2 ■ R3 ■ R4

Frequency Range	MHz	(4x) 696-960	
Frequency Sub-Range	MHz	696-806	806-960
Polarization	---	(4x) ±45°	
Gain	BASTA	dBi	8.1 ± 0.9
	MAX	dBi	9.0
Azimuth Beamwidth (3 dB)	degrees	75.7° ± 9.0°	75.4° ± 8.7°
Elevation Beamwidth (3 dB)	degrees	77.9° ± 14.6°	62.8° ± 19.6°
Electrical Downtilt	degrees	(w) 0°	
Impedance	Ohms	50Ω	
VSWR	---	1.5:1	
Passive Intermodulation 3rd Order for 2x20 W Carriers	dBc	< -153	
Upper Sidelobe Suppression	dB	N/A	
Isolation	Intraband	dB	> 25
	Interband	dB	> 28 same band; > 30 different bands

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 4C6U6VX065X12Fwxyz5

### ELECTRICAL SPECIFICATIONS

■ Y1 ■ Y2 ■ Y3 ■ Y4 ■ Y5 ■ Y6

Frequency Range	MHz	(6x) 1695-2700				
Frequency Sub-Range	MHz	1695-1880	1850-1990	1920-2200	2300-2700	
Polarization	---	(6x) ±45°				
Gain	BASTA	dBi	11.5 ± 1.0	11.8 ± 0.9	11.9 ± 1.1	12.5 ± 1.2
	MAX	dBi	12.5	12.7	13.0	13.7
Azimuth Beamwidth (3 dB)	degrees	69.4° ± 8.3°	67.9° ± 7.9°	67.6° ± 8.0°	68.0° ± 12.2°	
Elevation Beamwidth (3 dB)	degrees	26.4° ± 3.1°	24.2° ± 2.1°	23.1° ± 2.9°	19.3° ± 2.6°	
Electrical Downtilt	degrees	(x) 2°, 4°, 6°				
Impedance	Ohms	50Ω				
VSWR	---	1.5:1				
Passive Intermodulation 3rd Order for 2x20 W Carriers	dBc	< -153				
Upper Sidelobe Suppression	dB	N/A				
Isolation	Intraband	dB	> 25			
	Interband	dB	> 28 same band; > 30 different bands			

### ELECTRICAL SPECIFICATIONS

■ P1 ■ P2 ■ P3 ■ P4 ■ P5 ■ P6

Frequency Range	MHz	(6x) 3300-4200			
Frequency Sub-Range	MHz	3300-3550	3550-3700	3700-4200	
Polarization	---	(6x) ±45°			
Gain	BASTA	dBi	13.1 ± 0.8	13.6 ± 0.7	14.6 ± 0.8
	MAX	dBi	13.9	14.3	15.4
Azimuth Beamwidth (3 dB)	degrees	67.7° ± 13.4°	68.6° ± 10.3°	71.9° ± 11.9°	
Elevation Beamwidth (3 dB)	degrees	14.6° ± 0.9°	13.2° ± 1.0°	12.7° ± 1.1°	
Electrical Downtilt	degrees	(y) 2°, 4°, 6°			
Impedance	Ohms	50Ω			
VSWR	---	1.5:1			
Passive Intermodulation 3rd Order for 2x20 W Carriers	dBc	< -153			
Upper Sidelobe Suppression	dB	N/A			
Isolation	Intraband	dB	> 25		
	Interband	dB	> 28 same band; > 30 different bands		


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 4C6U6VX065X12Fwxyz5

### MECHANICAL SPECIFICATIONS

Antenna	Length	mm (in)	1219 (48.0)
	Width	mm (in)	527 (20.7)
	Depth	mm (in)	222 (8.7)
Net Weight - Antenna Only		kg (lbs)	18 (39)
Windload	Calculation	km/h (mph)	160 (100)
	Frontal	N (lbf)	480 (108)
	Side	N (lbf)	285 (64)
Survival Wind Speed		km/h (mph)	241 (150)
Connector	Type	---	4.3-10 Female (low band) and 2.2-5 Female (mid and high bands)
	Quantity	---	32
	Position	---	Bottom
Radome Color		---	Grey
Operating Temperature		degrees	-40 to +60 C (-40 to +140 F)
Lightning Protection (Grounding Type)		---	Direct Ground

## 4C6U6VX065X12Fwxyz5

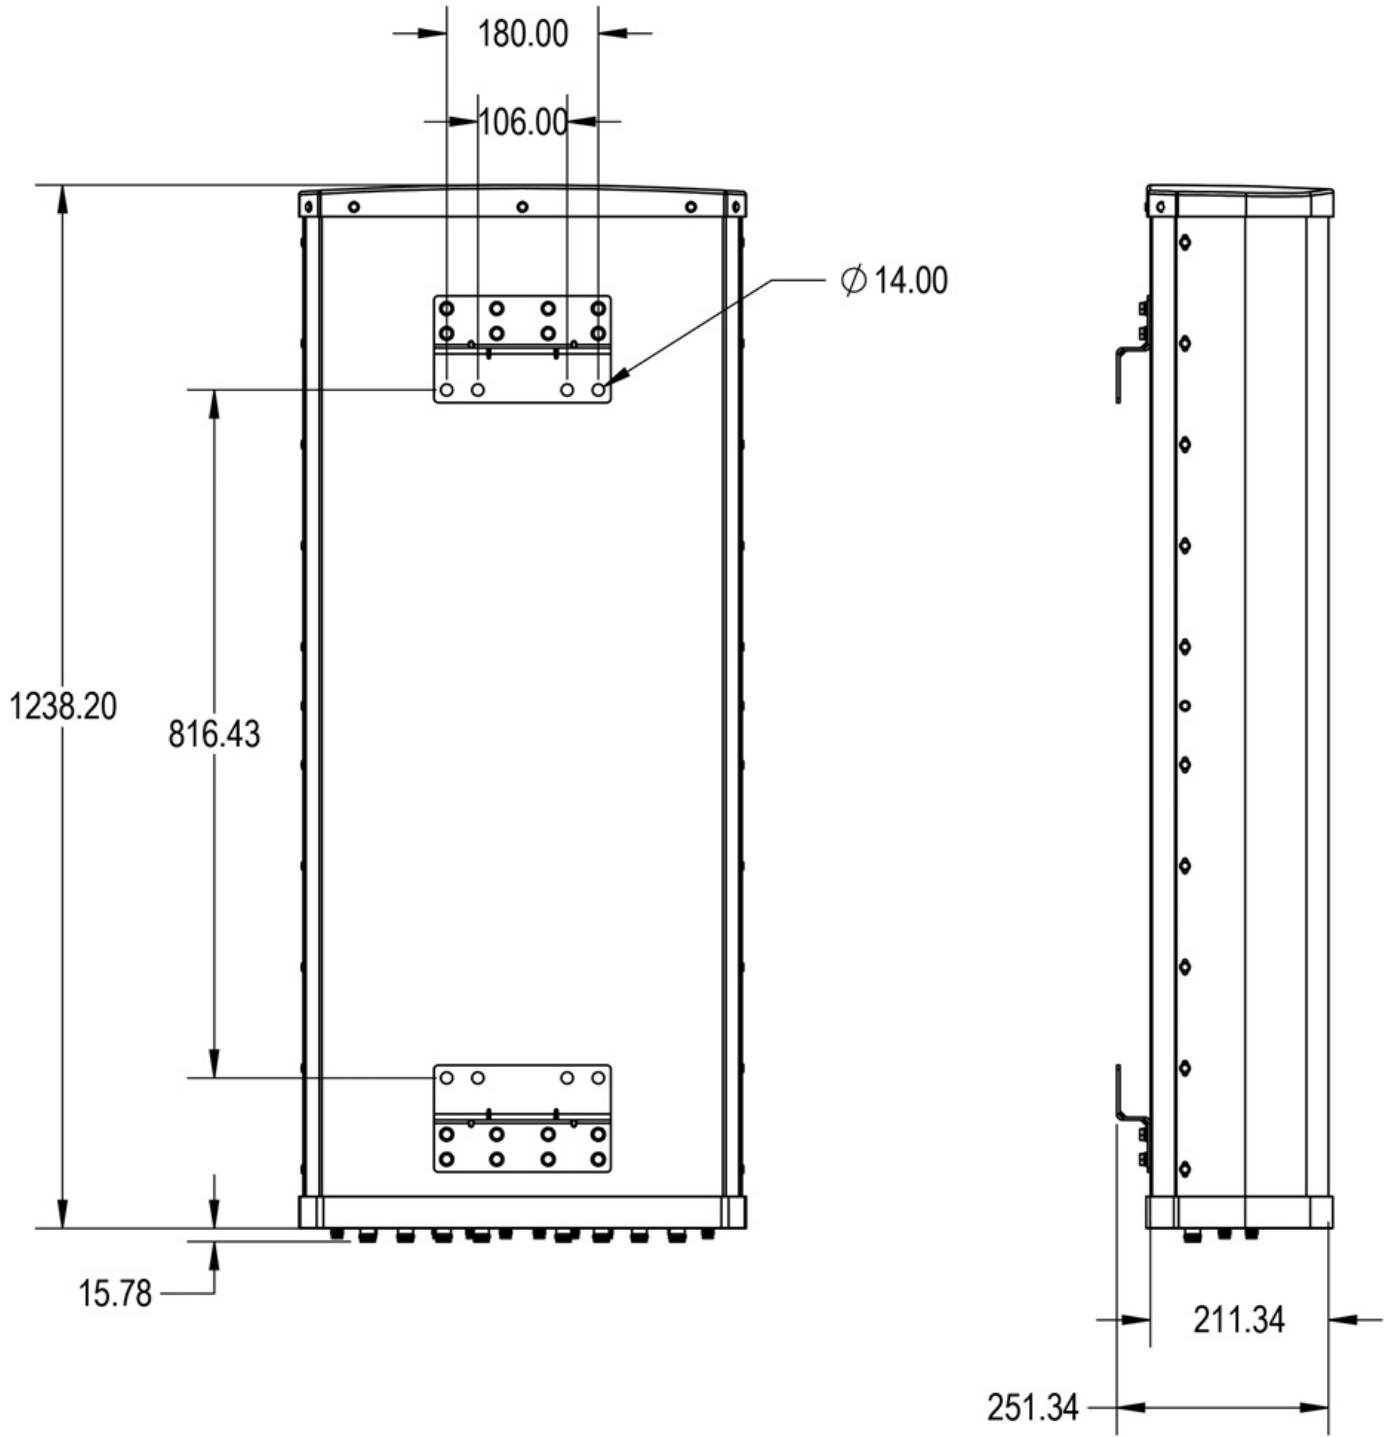


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 4C6U6VX065X12Fwxyz5

### ARRAY LAYOUT Topology


FREQUENCY	ARRAY	CONNECTOR	CONNECTOR TYPE
696-960 MHz	<span style="color: red;">■</span> R1	1-2	(2x) 4.3-10 Female
696-960 MHz	<span style="color: red;">■</span> R2	3-4	(2x) 4.3-10 Female
696-960 MHz	<span style="color: red;">■</span> R3	5-6	(2x) 4.3-10 Female
696-960 MHz	<span style="color: red;">■</span> R4	7-8	(2x) 4.3-10 Female
1695-2700 MHz	<span style="color: yellow;">■</span> Y1	9-10	(2x) 2.2-5 Female
1695-2700 MHz	<span style="color: yellow;">■</span> Y2	11-12	(2x) 2.2-5 Female
1695-2700 MHz	<span style="color: yellow;">■</span> Y3	13-14	(2x) 2.2-5 Female
1695-2700 MHz	<span style="color: yellow;">■</span> Y4	15-16	(2x) 2.2-5 Female
1695-2700 MHz	<span style="color: yellow;">■</span> Y5	17-18	(2x) 2.2-5 Female
1695-2700 MHz	<span style="color: yellow;">■</span> Y6	19-20	(2x) 2.2-5 Female
3300-4200 MHz	<span style="color: purple;">■</span> P1	21-22	(2x) 2.2-5 Female
3300-4200 MHz	<span style="color: purple;">■</span> P2	23-24	(2x) 2.2-5 Female
3300-4200 MHz	<span style="color: purple;">■</span> P3	25-26	(2x) 2.2-5 Female
3300-4200 MHz	<span style="color: purple;">■</span> P4	27-28	(2x) 2.2-5 Female
3300-4200 MHz	<span style="color: purple;">■</span> P5	29-30	(2x) 2.2-5 Female
3300-4200 MHz	<span style="color: purple;">■</span> P6	31-32	(2x) 2.2-5 Female

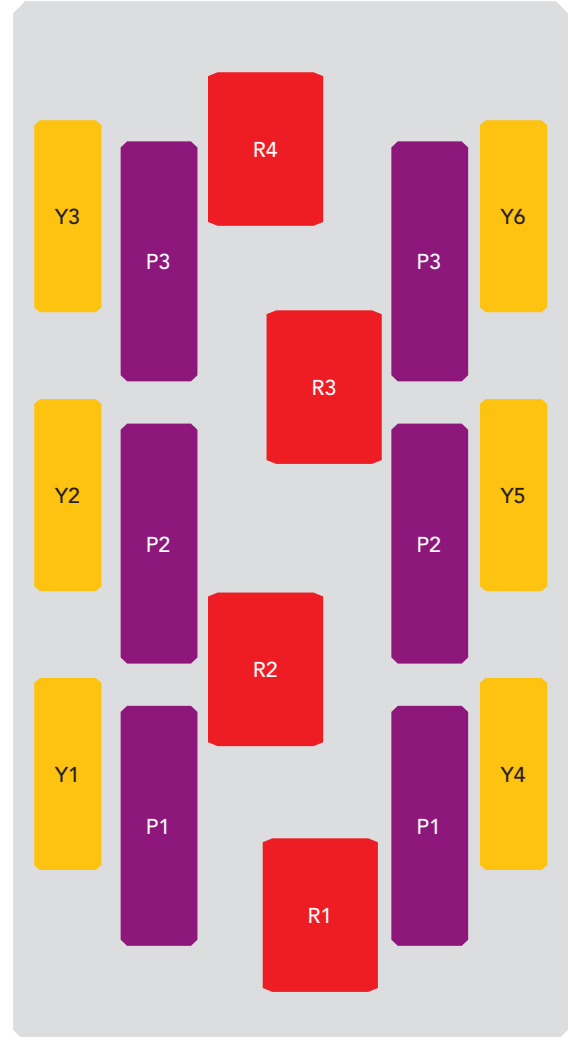

The illustration is not shown to scale.

## 4C6U6VX065X12Fwxyz5

### BOTTOM VIEW - LABELING

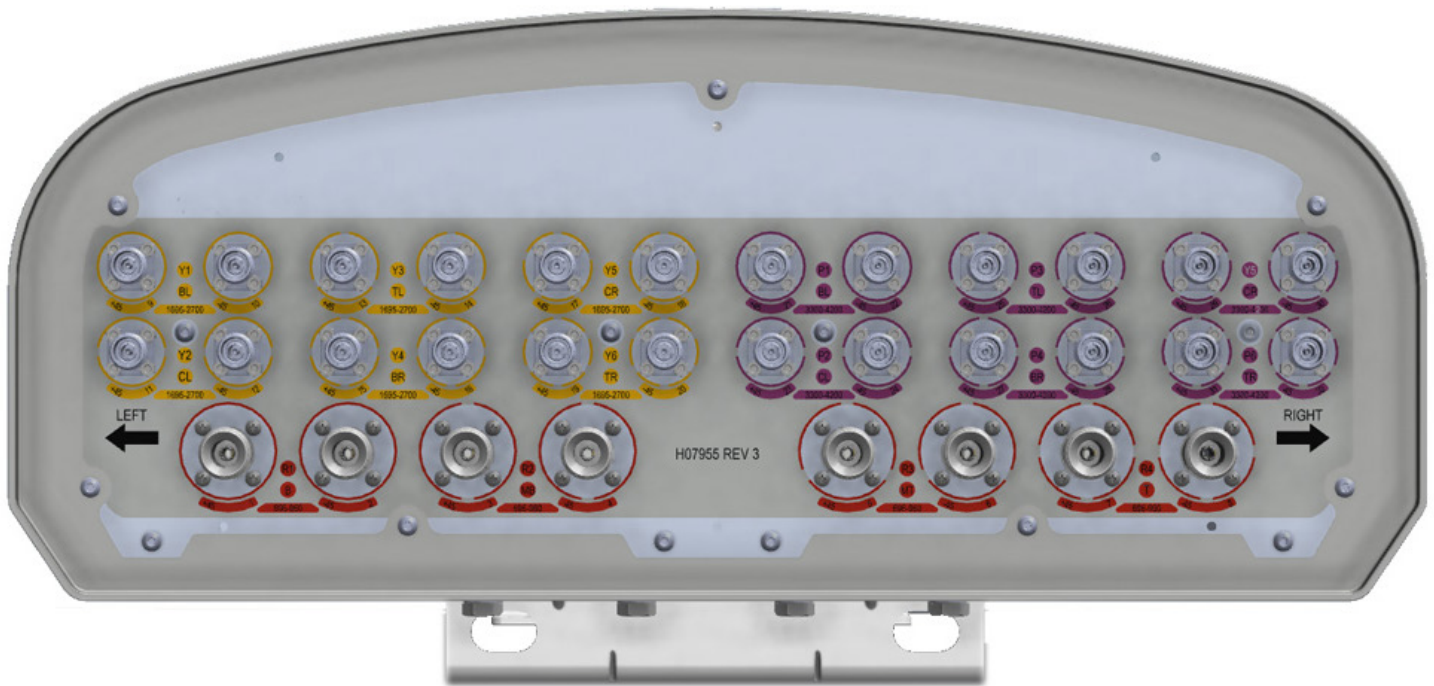

### MOUNTING KITS

Select from the following mounting options when ordering.

MODEL NUMBER	DESCRIPTION	FITS PIPE DIAMETER	WEIGHT
MKS10P01	2-POINT MOUNTING BRACKET KIT	50-115 mm (2.0-4.5 in)	4.8 kg (10.6 lbs)
MKS10T01	2-POINT, SCISSOR TILT, MOUNTING & DOWNTILT BRACKET KIT	50-115 mm (2.0-4.5 in)	7.2 kg (15.8 lbs)

### INSTALLATION

Please read all installation notes before installing this product.



Always attach the antenna using all mounting points.

Do not install the antenna with the connectors facing upwards.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 4C6U6VX065X12Fwxyz5

### HOW TO READ THE MODEL NUMBER Each letter and number has meaning.

NUMBER OF BANDS and OPERATING FREQUENCY			PATTERN TYPE	AZIMUTH BMWIDTH	POLARIZATION	LENGTH	TILT TYPE	TILT OPTIONS	CONNECTOR TYPE	VARIATION	ORDERING OPTION
4C	6U	6V	X	065	X	12	F	wxy	c	5	-P -T
(4x) 696-960	(6x) 1695-2700	(6x) 3300-4200	Standard Panel Antenna	65°	XPOL	1.2 meters	Fixed Tilt	<p>These letters are placeholders for fixed tilt options.</p> <p>Refer to Electrical Specifications for available tilt options.</p>	This antenna features a combination of 4.3-10 connectors (low band) and 2.2-5 connectors (mid and high bands)	5th generation enhanced mechanical package	<p>To order the antenna and mounting kit together as one line item, add a -P for the 2-POINT MOUNTING BRACKET KIT (MKS10P01) or a -T for the 2-POINT, SCISSOR TILT, MOUNTING &amp; DOWNTILT BRACKET KIT (MKS10T01) to the end of the model number.</p> <p>If -P or -T is not added, the bracket kit can be added as a separate line item, or the antenna shipped without a bracket.</p> <p>Refer to the ordering options on the following page for further detail.</p>

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 4C6U6VX065X12Fwxyz5

### ORDERING OPTIONS Select from the following ordering options


SELECT MOUNTING KIT	SELECT DEGREE OF ELECTRICAL DOWNTILT FOR EACH BAND			ORDER MODEL NUMBER
	696-960 MHz	1695-2700 MHz	3300-4200 MHz	
ANTENNA ONLY - NO MOUNTING KIT	0°	2°	2°	4C6U6VX065X12F022c5
	0°	4°	4°	4C6U6VX065X12F044c5
	0°	6°	6°	4C6U6VX065X12F066c5
	0°	Y1, Y2 = 2°; Y3, Y4, Y5, Y6 = 4°	2°	4C6U6VX065X12F0A2c5
	0°	Y1, Y2 = 2°; Y3, Y4, Y5, Y6 = 6°	2°	4C6U6VX065X12F0B2c5
	0°	Y1, Y2 = 4°; Y3, Y4, Y5, Y6 = 6°	2°	4C6U6VX065X12F0C2c5
	0°	Y1, Y2 = 2°; Y3, Y4, Y5, Y6 = 4°	4°	4C6U6VX065X12F0A4c5
	0°	Y1, Y2 = 2°; Y3, Y4, Y5, Y6 = 6°	4°	4C6U6VX065X12F0B4c5
	0°	Y1, Y2 = 4°; Y3, Y4, Y5, Y6 = 6°	4°	4C6U6VX065X12F0C4c5
	0°	Y1, Y2 = 2°; Y3, Y4, Y5, Y6 = 4°	6°	4C6U6VX065X12F0A6c5
	0°	Y1, Y2 = 2°; Y3, Y4, Y5, Y6 = 6°	6°	4C6U6VX065X12F0B6c5
	0°	Y1, Y2 = 4°; Y3, Y4, Y5, Y6 = 6°	6°	4C6U6VX065X12F0C6c5
ANTENNA WITH <b>MKS10P01</b> MOUNTING KIT  2-Point Mounting Bracket Kit	0°	2°	2°	4C6U6VX065X12F022c5-P
	0°	4°	4°	4C6U6VX065X12F044c5-P
	0°	6°	6°	4C6U6VX065X12F066c5-P
	0°	Y1, Y2 = 2°; Y3, Y4, Y5, Y6 = 4°	2°	4C6U6VX065X12F0A2c5-P
	0°	Y1, Y2 = 2°; Y3, Y4, Y5, Y6 = 6°	2°	4C6U6VX065X12F0B2c5-P
	0°	Y1, Y2 = 4°; Y3, Y4, Y5, Y6 = 6°	2°	4C6U6VX065X12F0C2c5-P
	0°	Y1, Y2 = 2°; Y3, Y4, Y5, Y6 = 4°	4°	4C6U6VX065X12F0A4c5-P
	0°	Y1, Y2 = 2°; Y3, Y4, Y5, Y6 = 6°	4°	4C6U6VX065X12F0B4c5-P
	0°	Y1, Y2 = 4°; Y3, Y4, Y5, Y6 = 6°	4°	4C6U6VX065X12F0C4c5-P
	0°	Y1, Y2 = 2°; Y3, Y4, Y5, Y6 = 4°	6°	4C6U6VX065X12F0A6c5-P
	0°	Y1, Y2 = 2°; Y3, Y4, Y5, Y6 = 6°	6°	4C6U6VX065X12F0B6c5-P
	0°	Y1, Y2 = 4°; Y3, Y4, Y5, Y6 = 6°	6°	4C6U6VX065X12F0C6c5-P
ANTENNA WITH <b>MKS10T01</b> MOUNTING KIT  2-Point, Scissor Tilt, Mounting & Downtilt Bracket Kit	0°	2°	2°	4C6U6VX065X12F022c5-T
	0°	4°	4°	4C6U6VX065X12F044c5-T
	0°	6°	6°	4C6U6VX065X12F066c5-T
	0°	Y1, Y2 = 2°; Y3, Y4, Y5, Y6 = 4°	2°	4C6U6VX065X12F0A2c5-T
	0°	Y1, Y2 = 2°; Y3, Y4, Y5, Y6 = 6°	2°	4C6U6VX065X12F0B2c5-T
	0°	Y1, Y2 = 4°; Y3, Y4, Y5, Y6 = 6°	2°	4C6U6VX065X12F0C2c5-T
	0°	Y1, Y2 = 2°; Y3, Y4, Y5, Y6 = 4°	4°	4C6U6VX065X12F0A4c5-T
	0°	Y1, Y2 = 2°; Y3, Y4, Y5, Y6 = 6°	4°	4C6U6VX065X12F0B4c5-T
	0°	Y1, Y2 = 4°; Y3, Y4, Y5, Y6 = 6°	4°	4C6U6VX065X12F0C4c5-T
	0°	Y1, Y2 = 2°; Y3, Y4, Y5, Y6 = 4°	6°	4C6U6VX065X12F0A6c5-T
	0°	Y1, Y2 = 2°; Y3, Y4, Y5, Y6 = 6°	6°	4C6U6VX065X12F0B6c5-T
	0°	Y1, Y2 = 4°; Y3, Y4, Y5, Y6 = 6°	6°	4C6U6VX065X12F0C6c5-T

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.




## 4C6U6VX065X12Fwxyc5


**R1, 0° TILT**

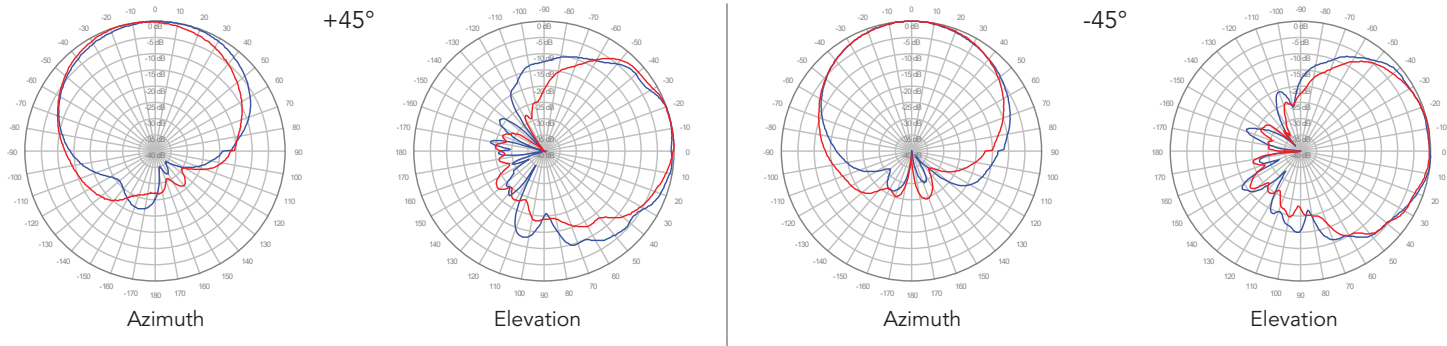


**R2, 0° TILT**

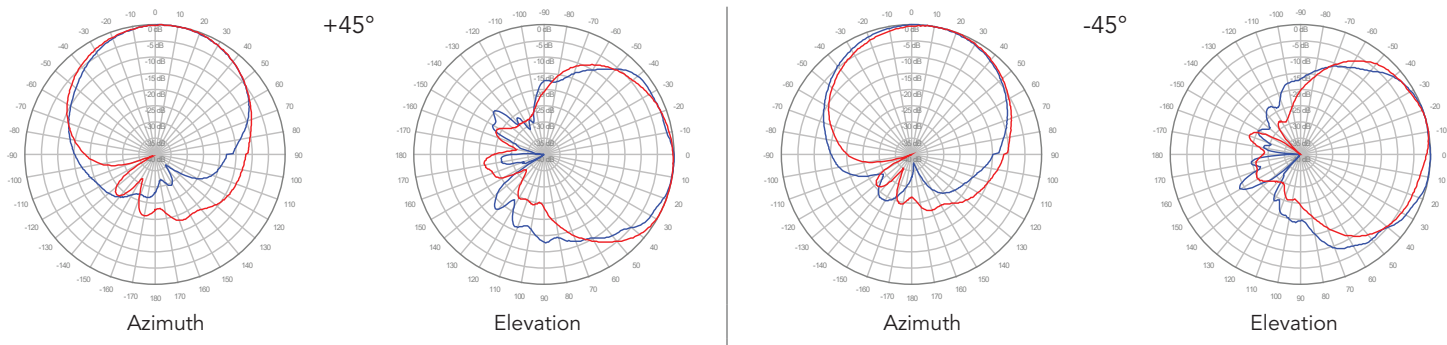

**R3, 0° TILT**

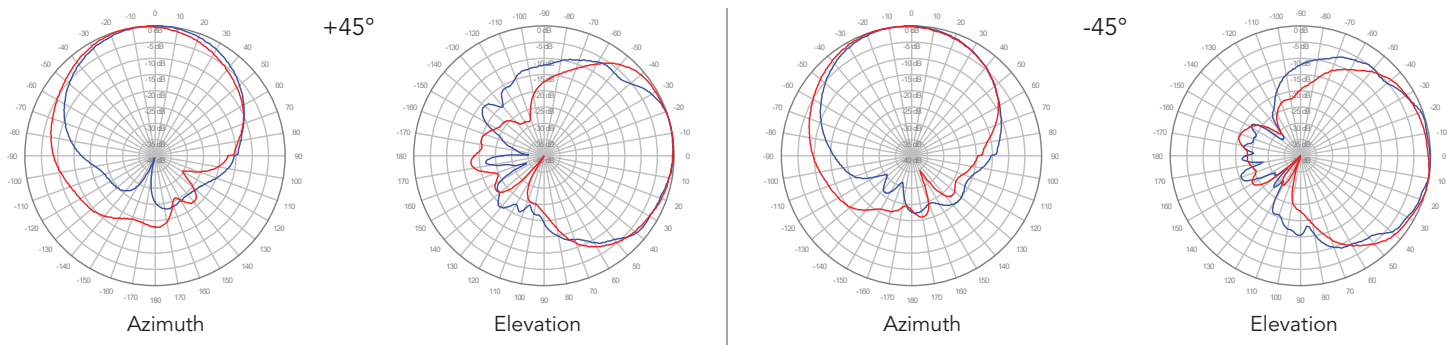

**R4, 0° TILT**

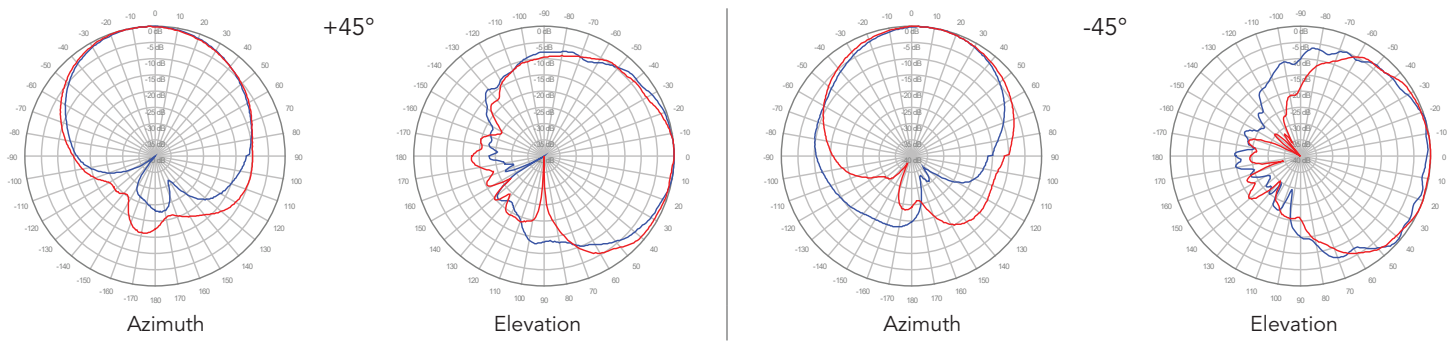


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


## 4C6U6VX065X12Fwxyc5

- 1800 MHz ———
- 1900 MHz ———
- 2100 MHz ———
- 2300 MHz ———
- 2600 MHz ———


### ■ Y1, 2° TILT

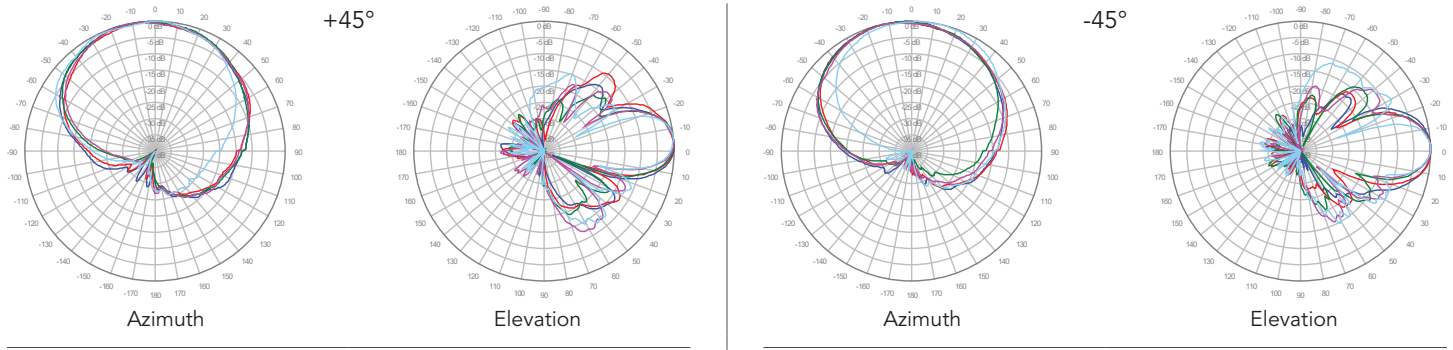


### ■ Y2, 2° TILT

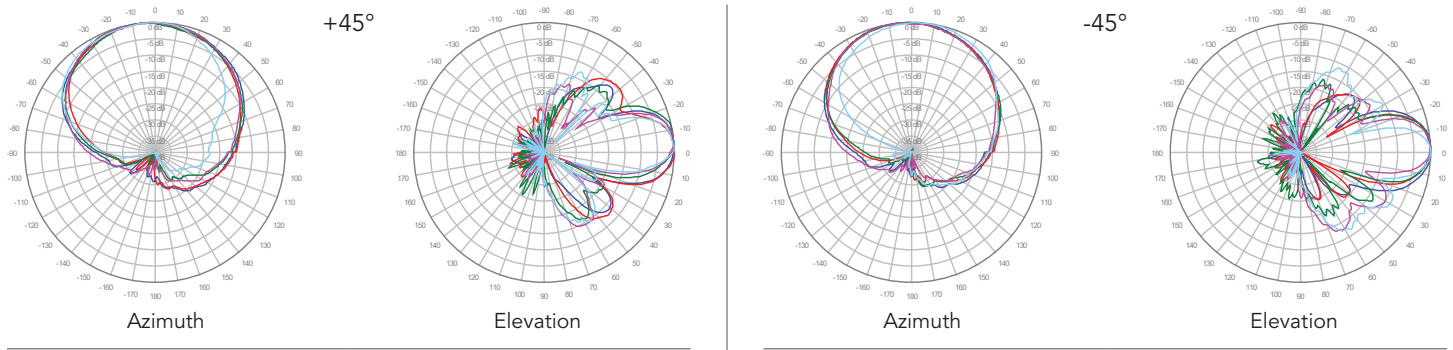

### ■ Y3, 2° TILT

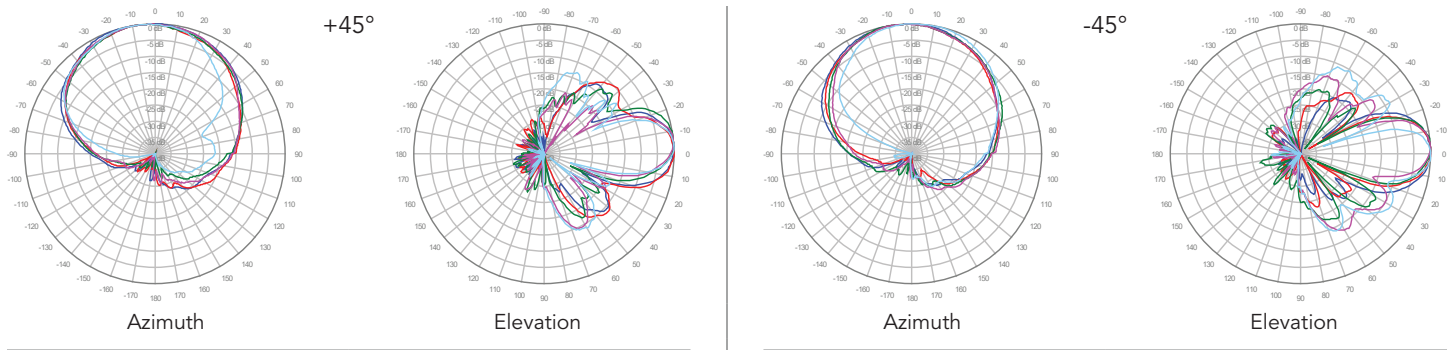

### ■ Y4, 2° TILT

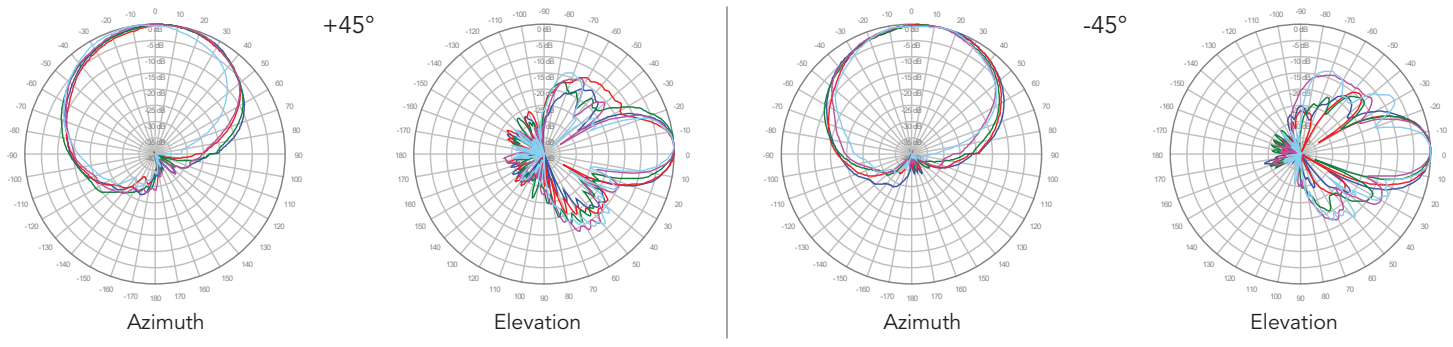


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


## 4C6U6VX065X12Fwxyz5

- 1800 MHz ———
- 1900 MHz ———
- 2100 MHz ———
- 2300 MHz ———
- 2600 MHz ———

### Y5, 2° TILT

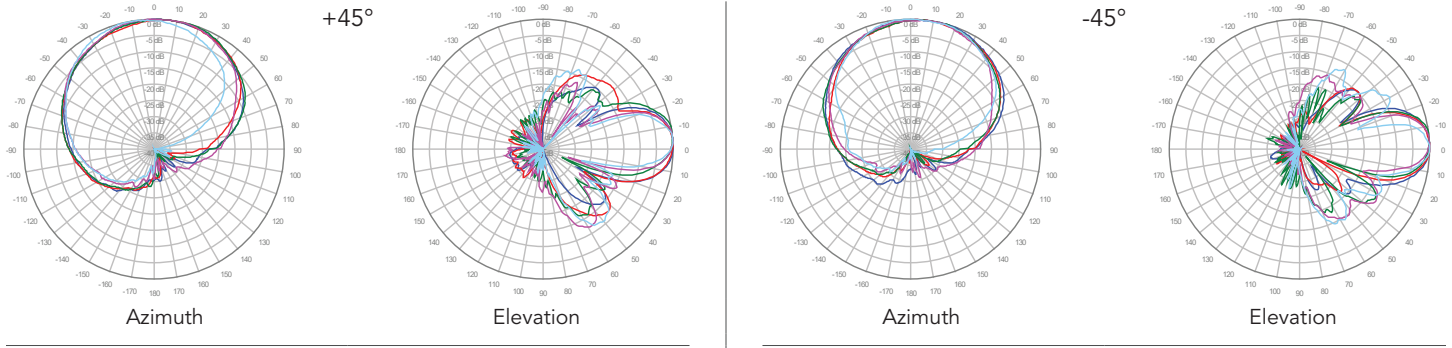

### Y6, 2° TILT

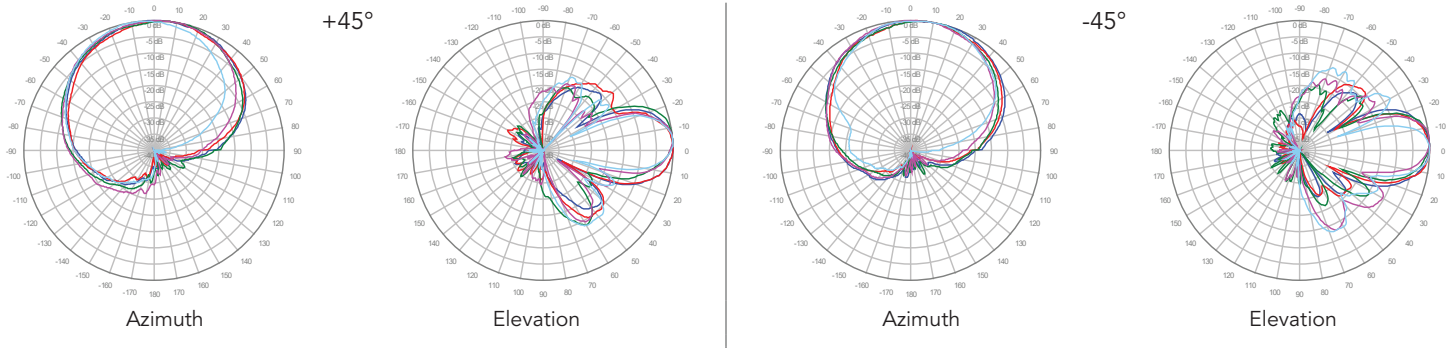


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


## 4C6U6VX065X12Fwxyc5

- 1800 MHz ———
- 1900 MHz ———
- 2100 MHz ———
- 2300 MHz ———
- 2600 MHz ———


**Y1, 4° TILT**

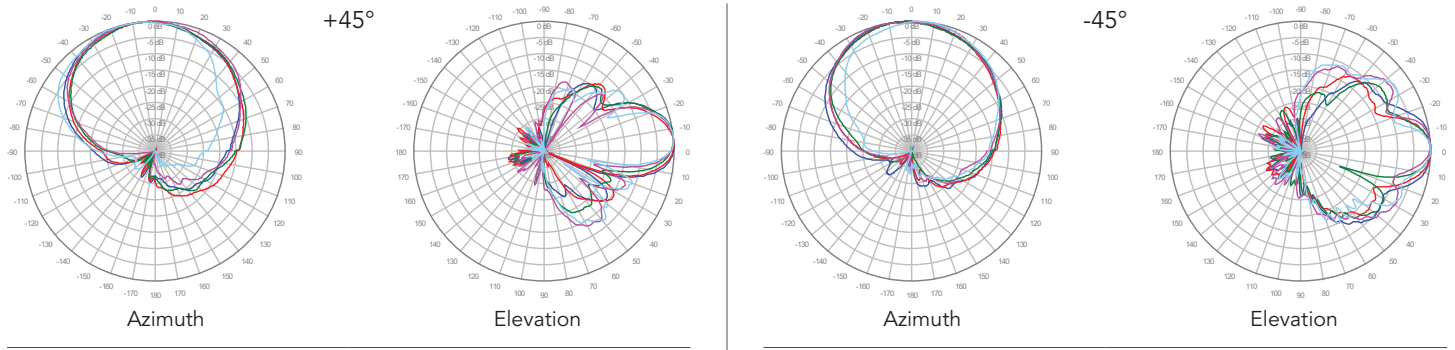


**Y2, 4° TILT**

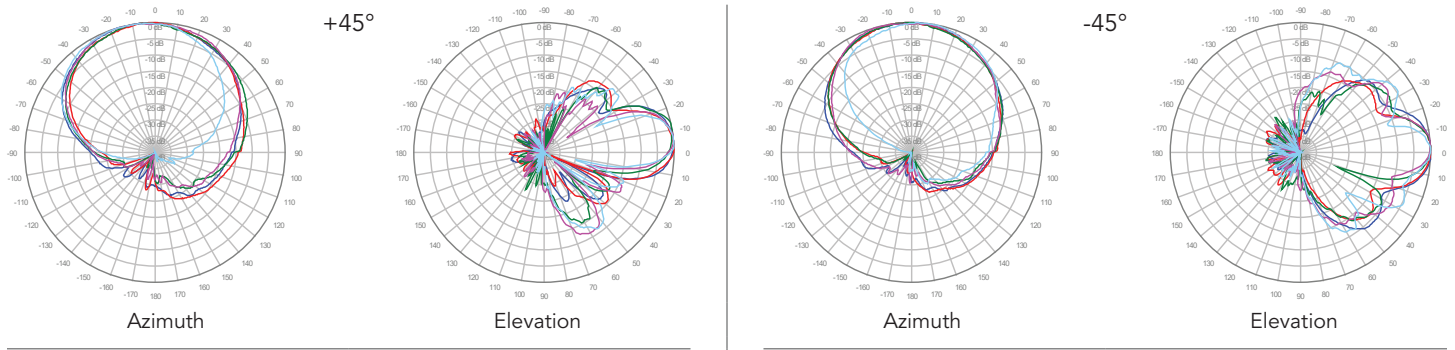

**Y3, 4° TILT**

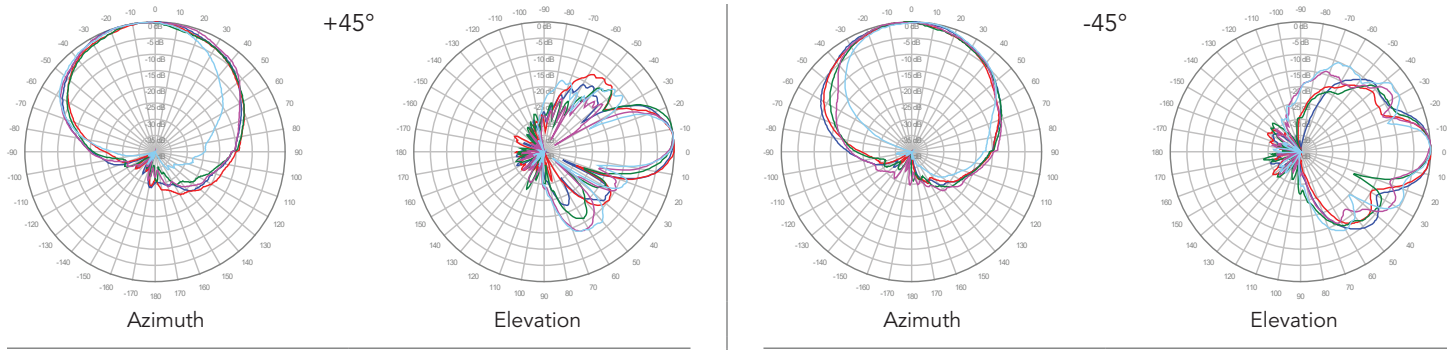

**Y4, 4° TILT**

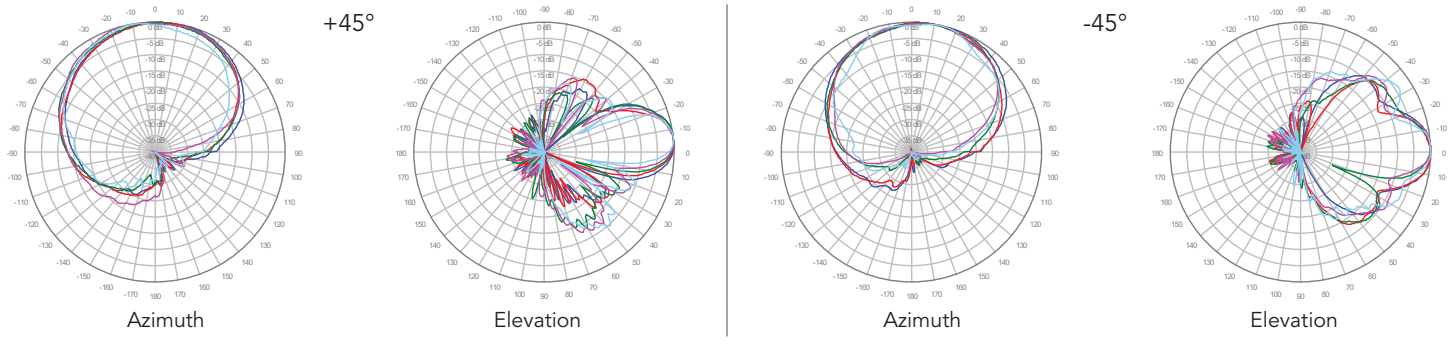


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


## 4C6U6VX065X12Fwxyz5

- 1800 MHz ———
- 1900 MHz ———
- 2100 MHz ———
- 2300 MHz ———
- 2600 MHz ———

**Y5, 4° TILT**

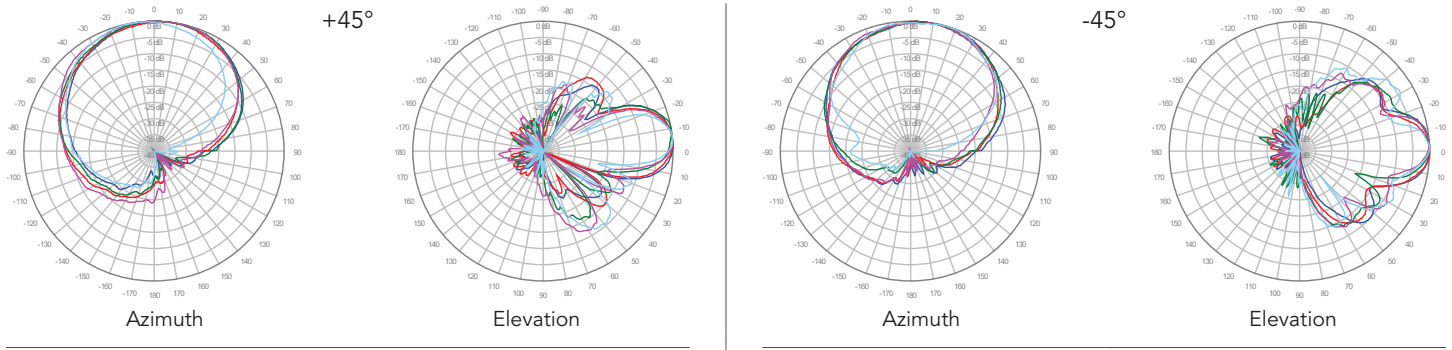

**Y6, 4° TILT**

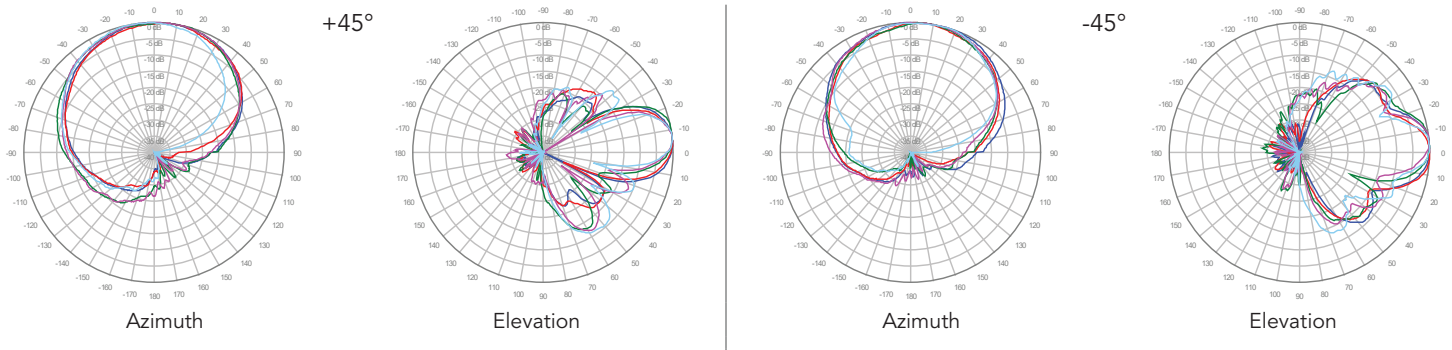


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


## 4C6U6VX065X12Fwxyc5

- 1800 MHz ———
- 1900 MHz ———
- 2100 MHz ———
- 2300 MHz ———
- 2600 MHz ———


**Y1, 6° TILT**

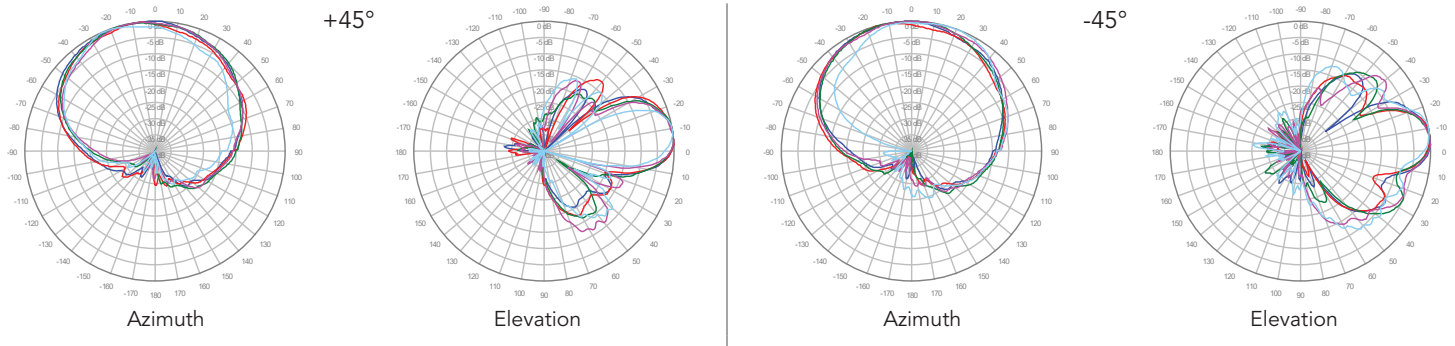


**Y2, 6° TILT**

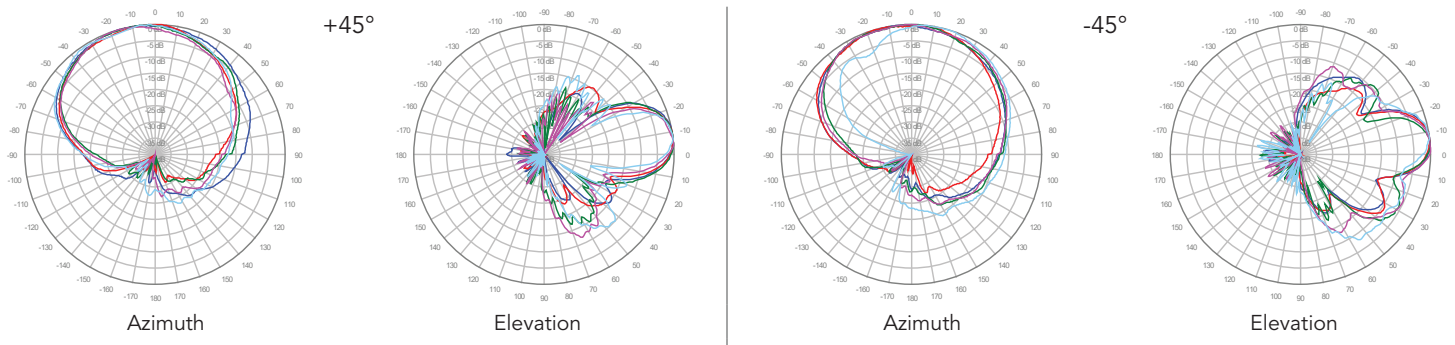

**Y3, 6° TILT**

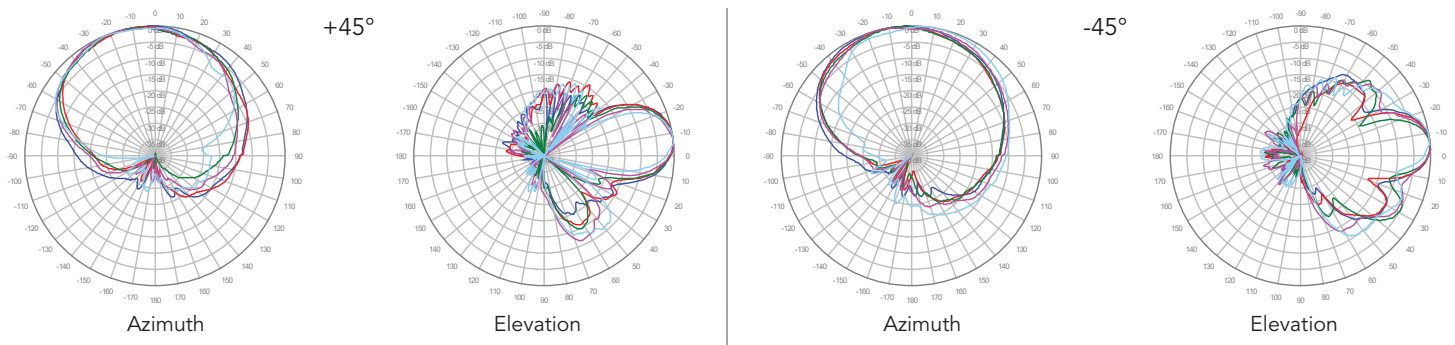

**Y4, 6° TILT**


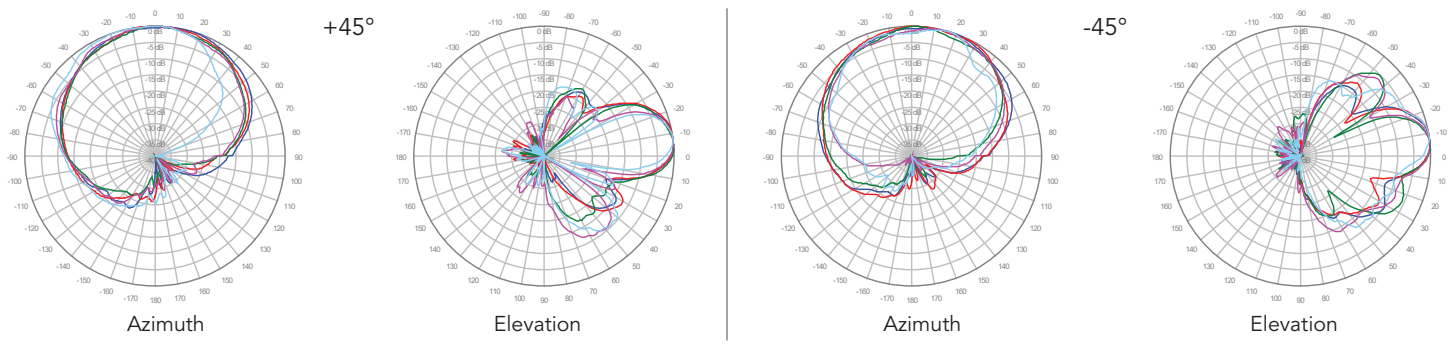


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.



## 4C6U6VX065X12Fwxyz5

- 1800 MHz ———
- 1900 MHz ———
- 2100 MHz ———
- 2300 MHz ———
- 2600 MHz ———

■ Y5, 6° TILT

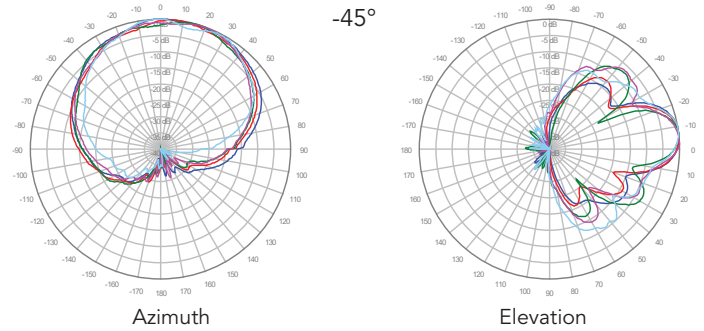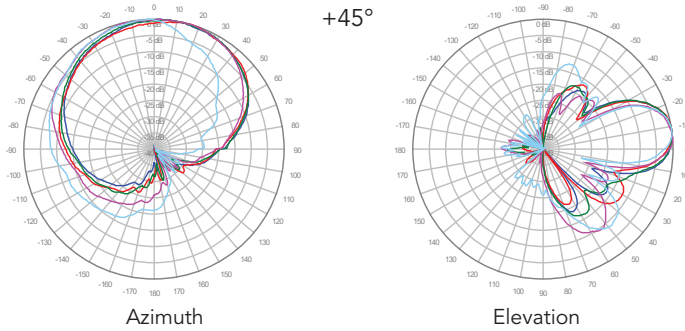

■ Y6, 6° TILT

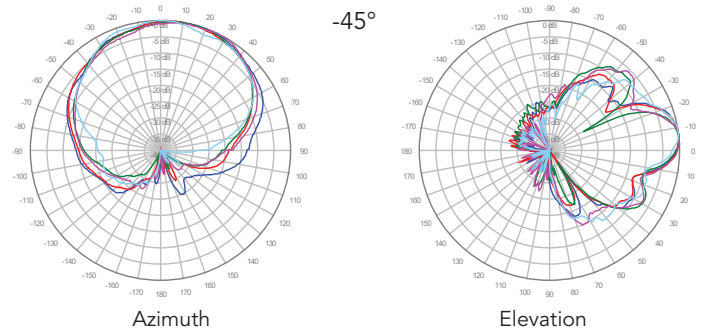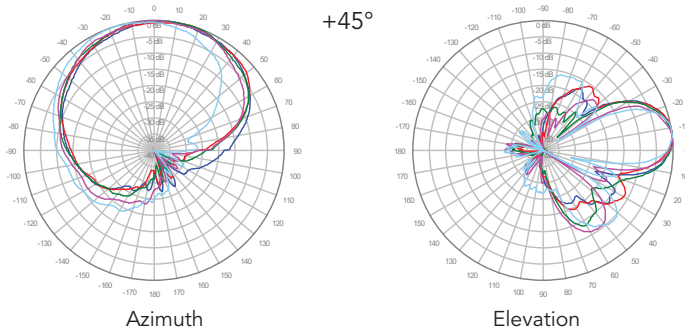


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


## 4C6U6VX065X12Fwxyc5

3600 MHz ————  
4000 MHz ————


### P1, 2° TILT

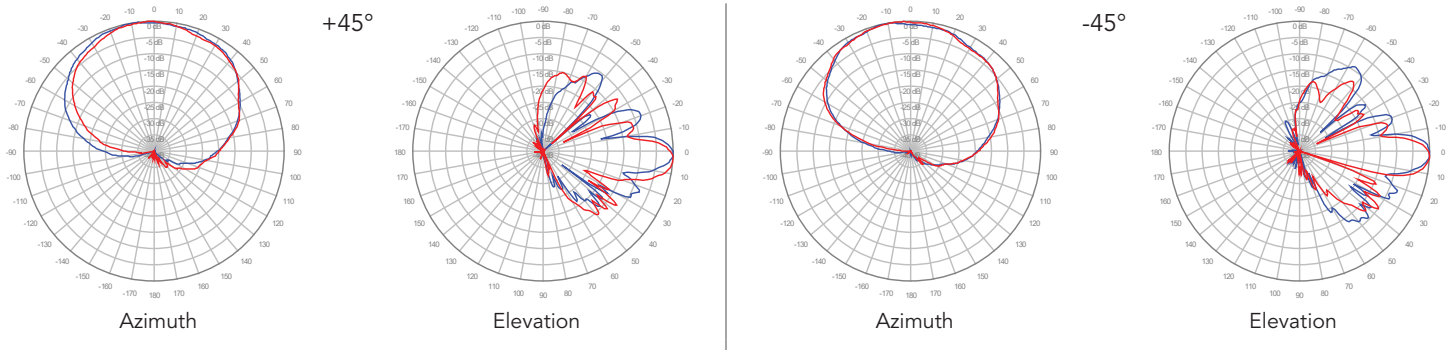


### P2, 2° TILT

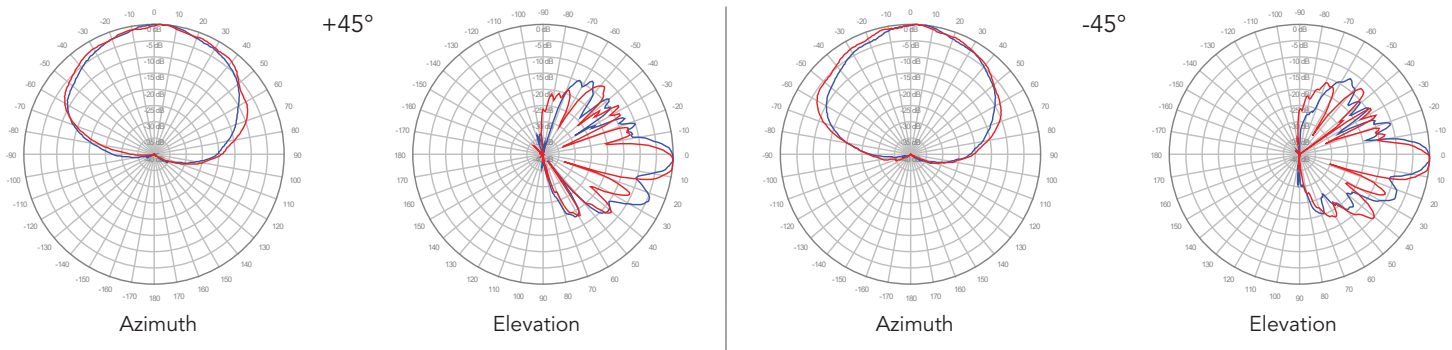

### P3, 2° TILT

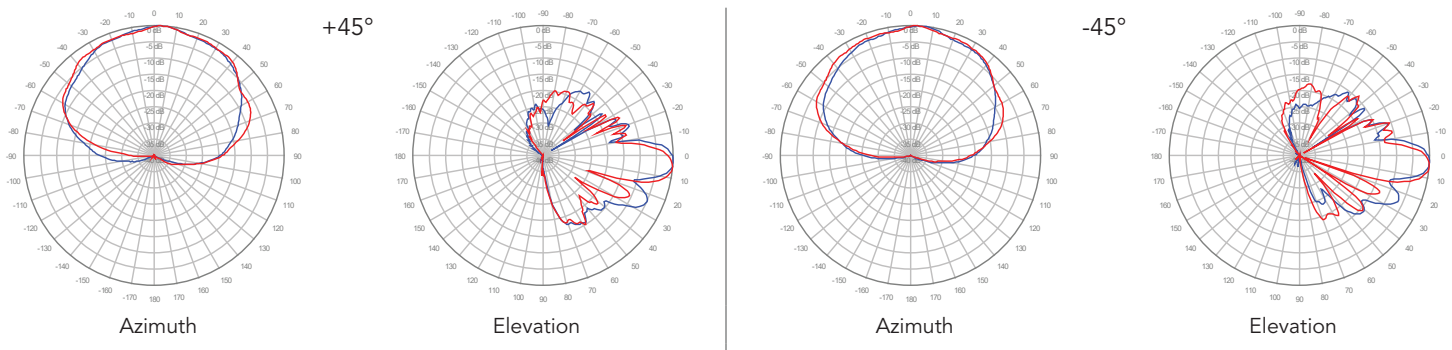

### P4, 2° TILT

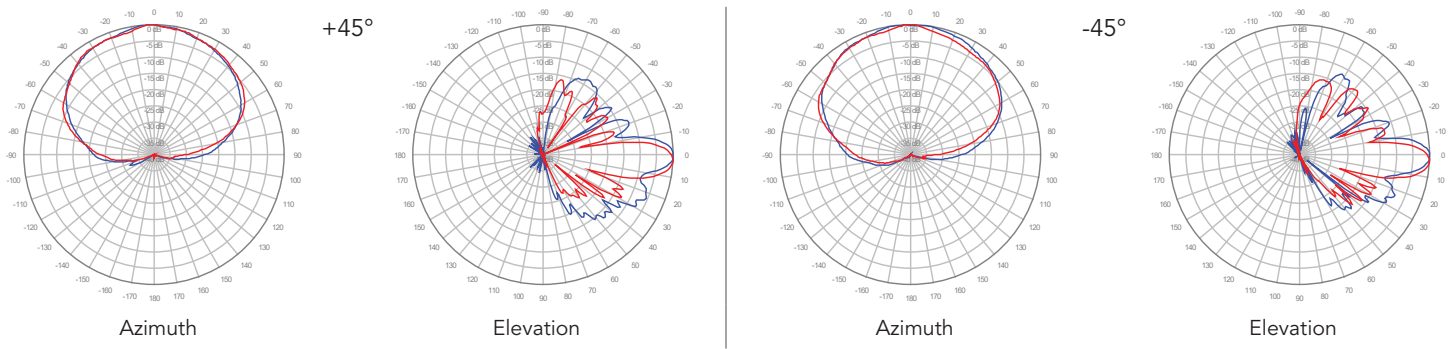


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.




## 4C6U6VX065X12Fwxyz5

3600 MHz ————  
4000 MHz ————

**P5, 2° TILT**

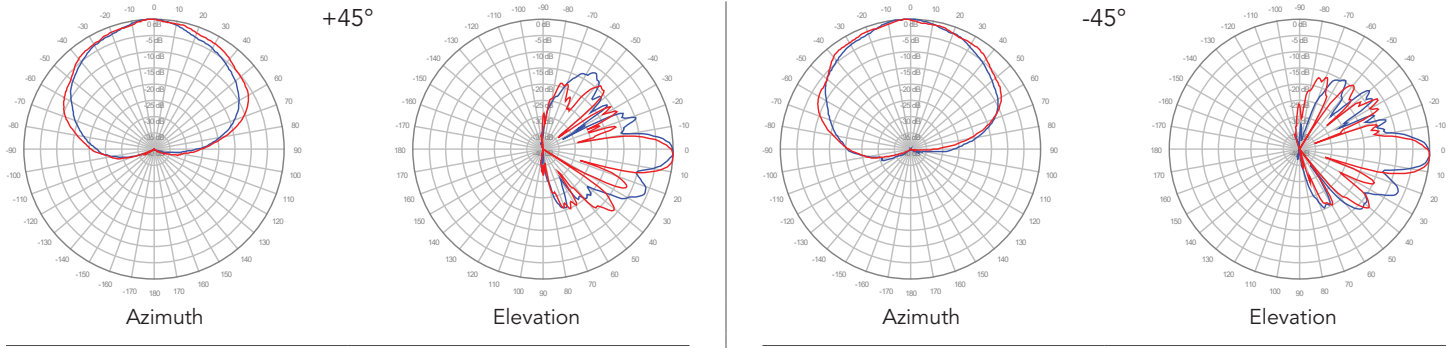


**P6, 2° TILT**

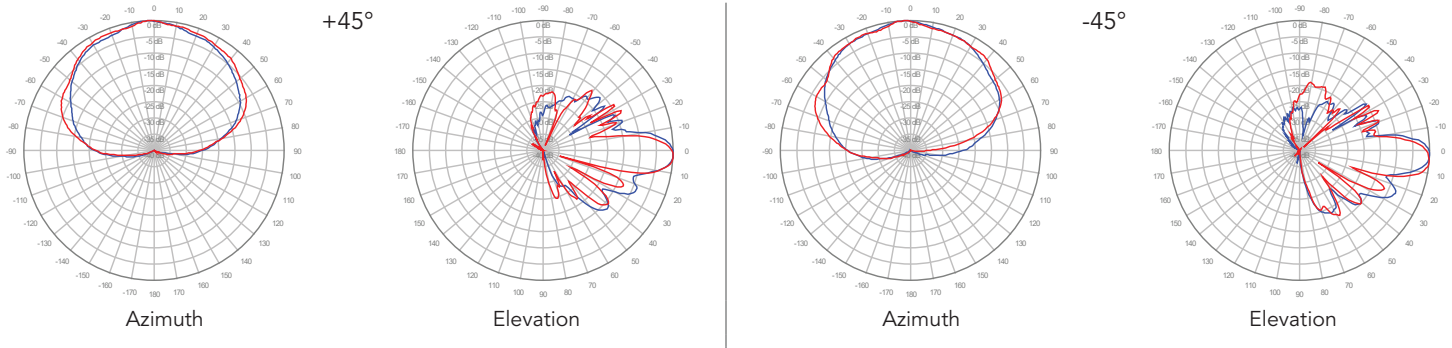


## 4C6U6VX065X12Fwxyc5

3600 MHz ————  
4000 MHz ————


### P1, 4° TILT

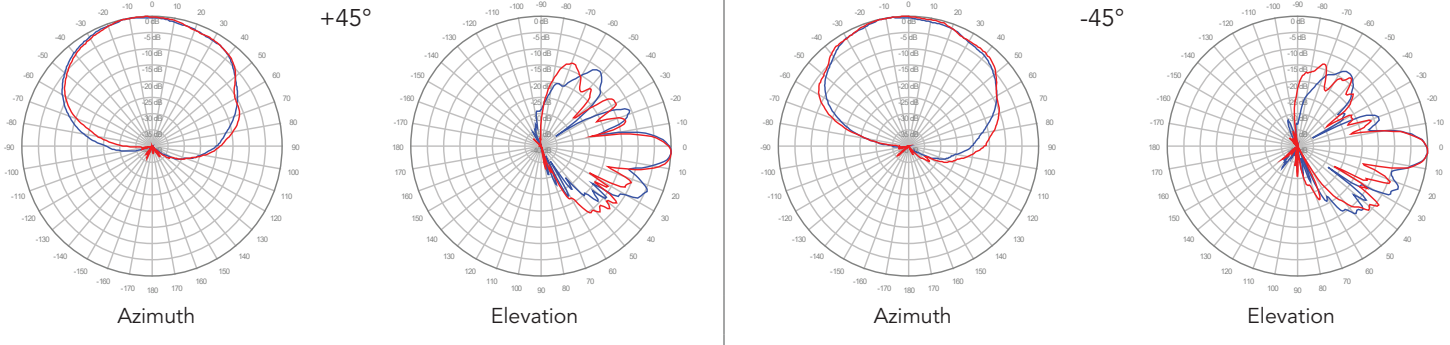


### P2, 4° TILT

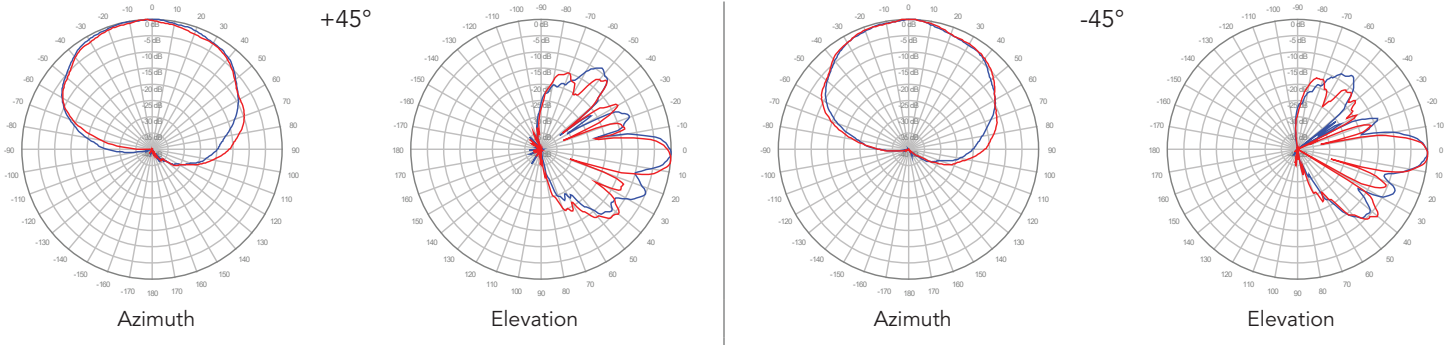

### P3, 4° TILT

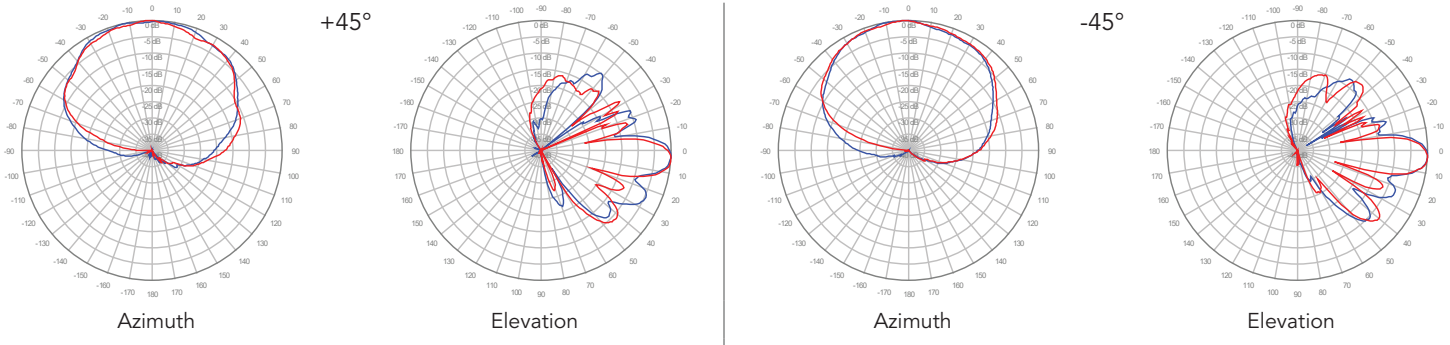

### P4, 4° TILT

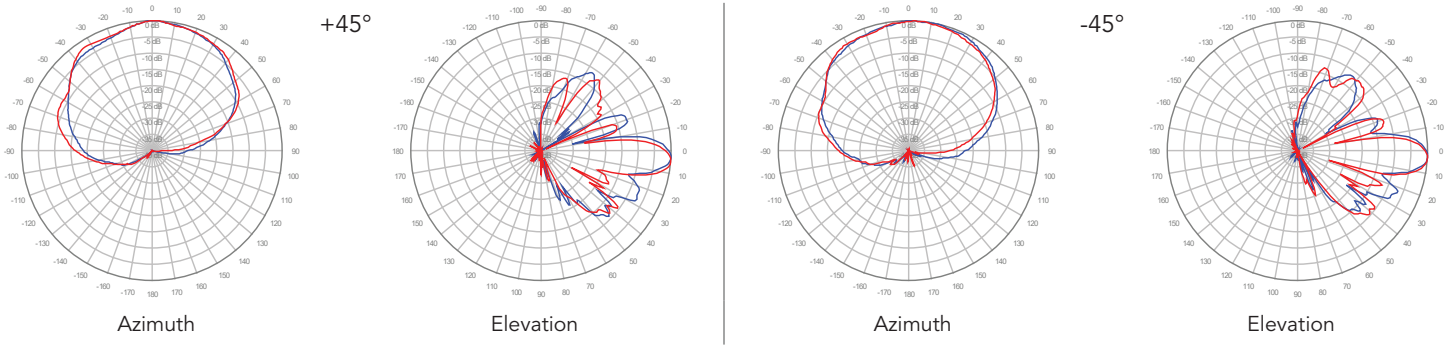


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


## 4C6U6VX065X12Fwxyz5

3600 MHz ————  
4000 MHz ————

**P5, 4° TILT**

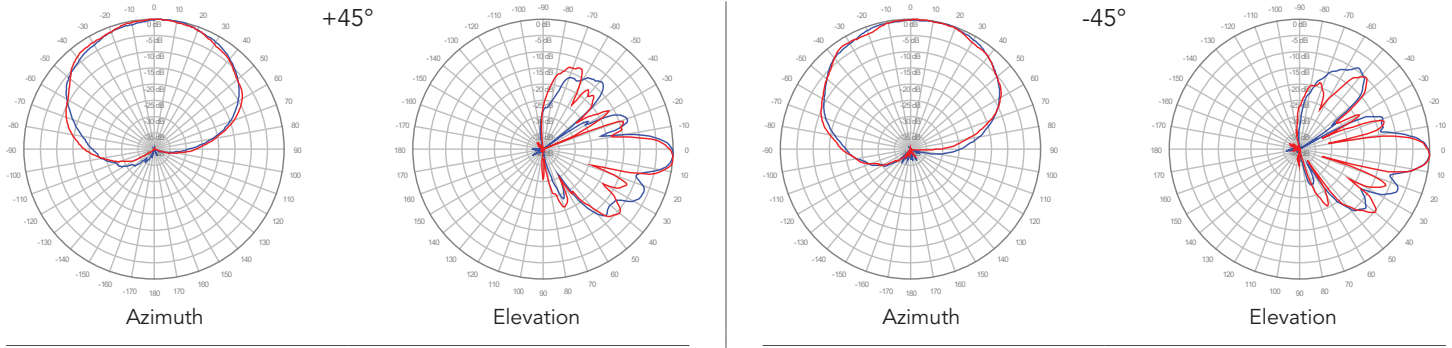


**P6, 4° TILT**

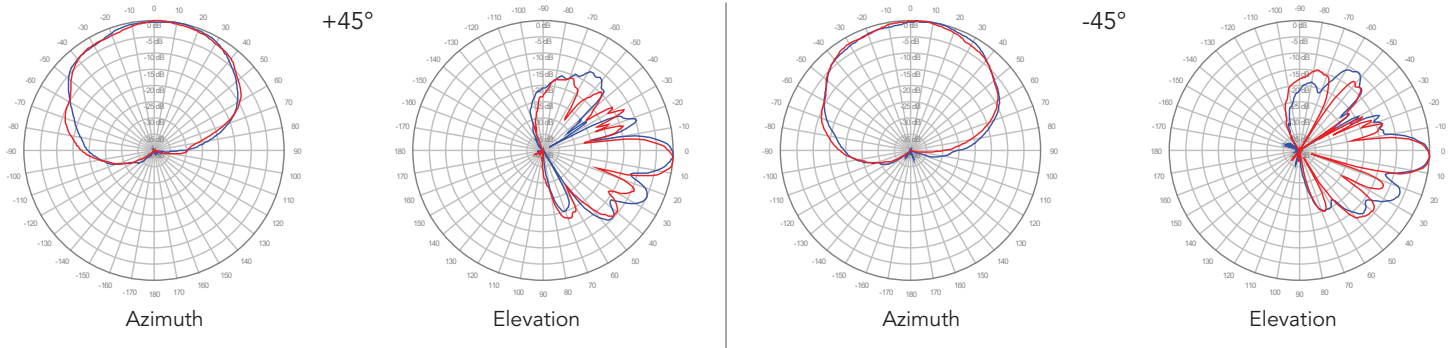


## 4C6U6VX065X12Fwxyc5

3600 MHz ————  
4000 MHz ————


### ■ P1, 6° TILT

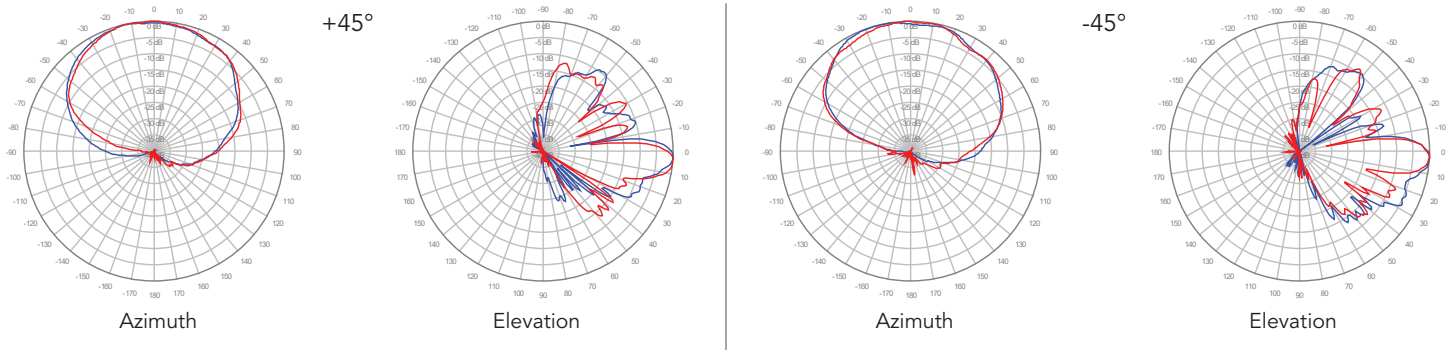


### ■ P2, 6° TILT

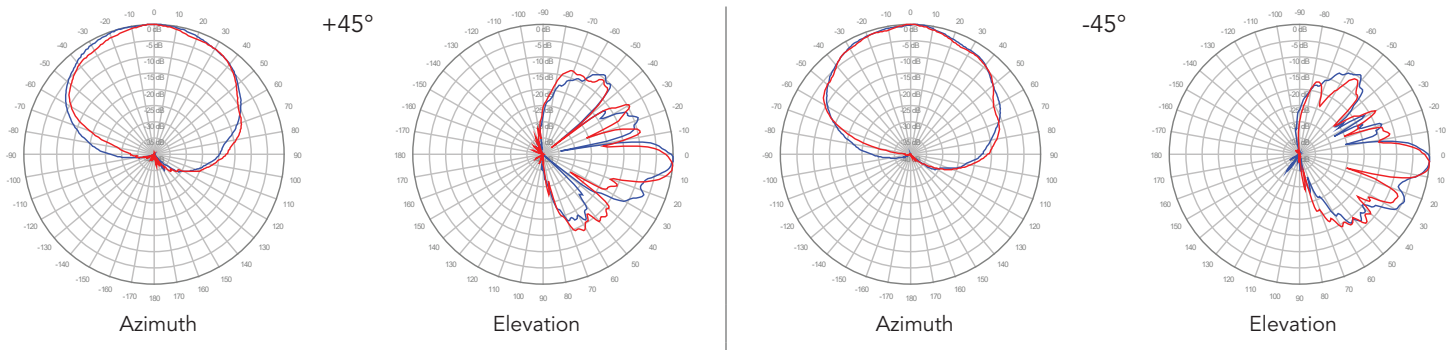

### ■ P3, 6° TILT

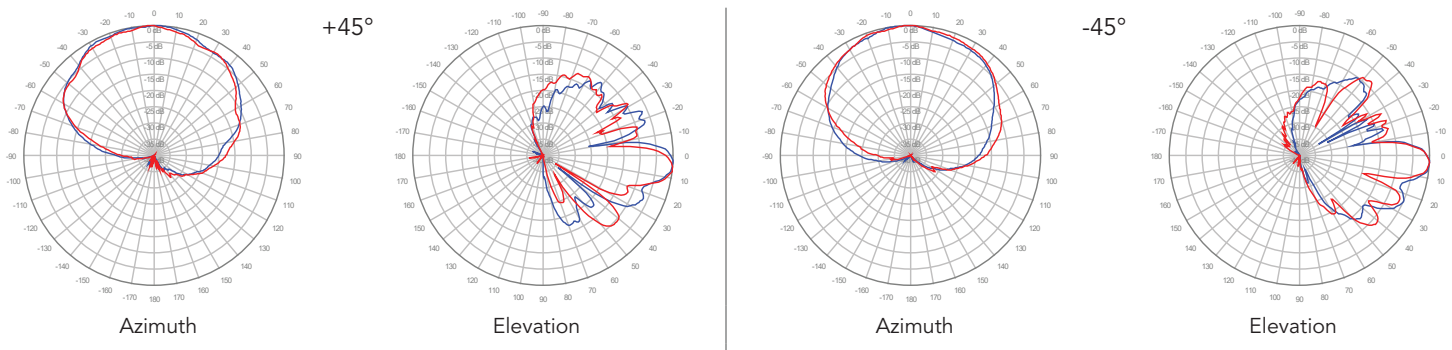

### ■ P4, 6° TILT

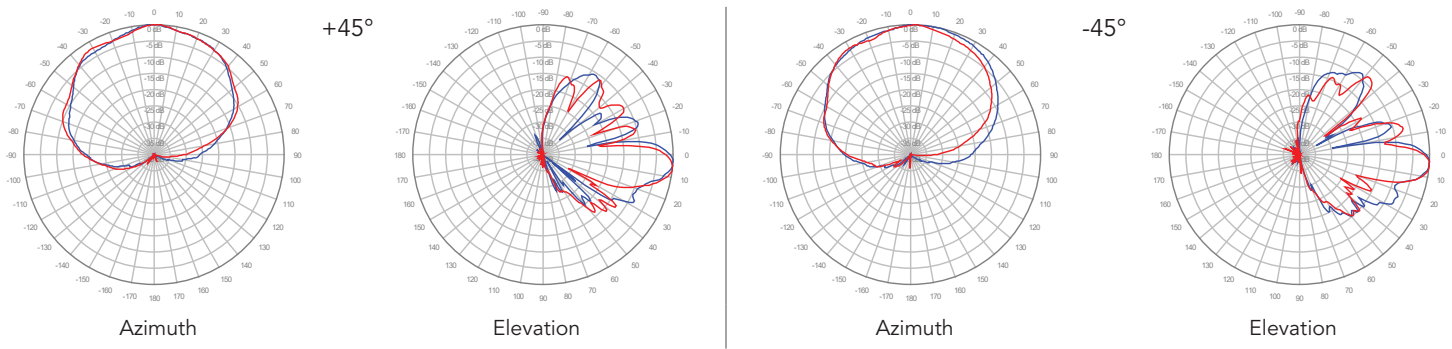


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 4C6U6VX065X12Fwxyz5

3600 MHz ————  
4000 MHz ————

**P5, 6° TILT**

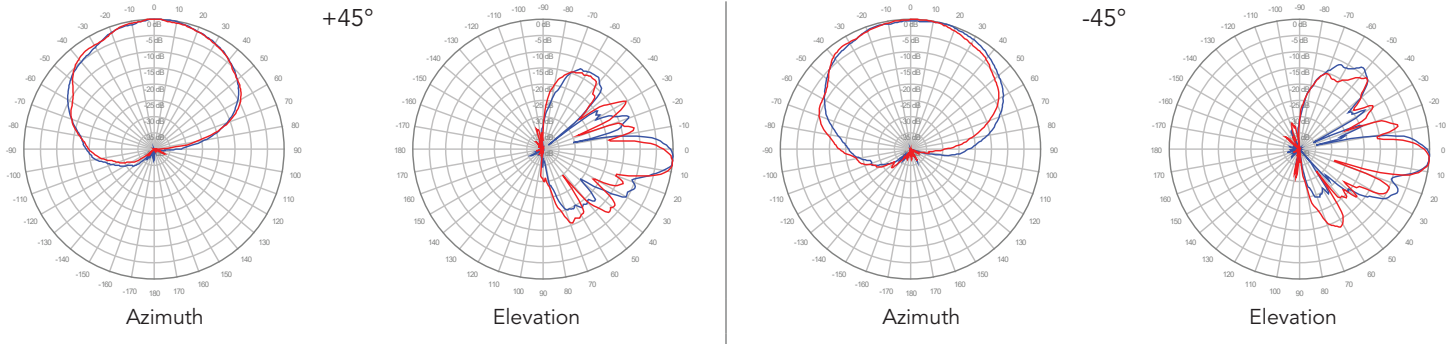

**P6, 6° TILT**

