

## 4U6VT360X06F<sub>xy</sub>s4



### Features

- Pseudo omni configuration with 20 connectors
- Ideal for multi-carrier or 4x4 MIMO deployments
- Broadband networks 1695-2700 and 3300-4200 MHz
- Easily removable lifting ring
- Improvements in gain, port isolation and VSWR
- Available for order with a grey, brown or black radome

PRODUCT OVERVIEW	Frequency Range (MHz)	(4x) 1695-2700	(4x) 3300-4200	(2x) 3300-4200
	Array	■ Y1, ■ Y2, ■ Y3, ■ Y4	■ P1, ■ P2, ■ P3, ■ P4	■ P5, ■ P6
	Connector	8 PORTS	8 PORTS	4 PORTS
	Polarization	XPOL	XPOL	XPOL
	Azimuth Beamwidth (avg)	360°	360°	360°
	Electrical Downtilt	2°, 4°, 6°	2°, 4°, 6°	2°
	Configuration	OMNI CONFIGURATION		
	Maximum Continuous Power Per Port @ 50° C (122° F)	300 WATTS	100 WATTS	100 WATTS
	Maximum Total Continuous Power at 50° C (122° F)	3600 WATTS		
	Connector Type	(20x) 4.3-10 FEMALE		
	Dimensions	609 x Ø371 mm (24.0 x Ø14.6 in)		
	Radome Color Options	GREY, BROWN or BLACK		

### ELECTRICAL SPECIFICATIONS

■ Y1 ■ Y2 ■ Y3 ■ Y4

Frequency Range	MHz	(4x) 1695-2700				
Frequency Sub-Range	MHz	1695-1880	1850-1990	1920-2200	2300-2700	
Polarization	---	(4x) ±45°				
Gain	BASTA	dBi	8.6 ± 1.3	9.7 ± 1.4	9.9 ± 1.4	9.8 ± 1.1
	MAX	dBi	9.9	11.1	11.3	10.9
Azimuth Beamwidth (3 dB)	degrees	360°	360°	360°	360°	
Elevation Beamwidth (3 dB)	degrees	19.8° ± 2.9°	18.4° ± 1.9°	18.1° ± 1.8°	15.4° ± 1.9°	
Electrical Downtilt	degrees	(x) 2°, 4°, 6°				
Impedance	Ohms	50Ω				
VSWR	---	< 1.5:1				
Passive Intermodulation 3rd Order for 2x20 W Carriers	dBc	< -153				
Upper Sidelobe Suppression	dB	N/A				
Isolation	Intraband	dB	> 24			
	Interband	dB	> 25			

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 4U6VT360X06F<sub>xy</sub>s4

### ELECTRICAL SPECIFICATIONS

■ P1 ■ P2 ■ P3 ■ P4

Frequency Range		MHz	(4x) 3300-4200		
Frequency Sub-Range		MHz	3300-3550	3550-3700	3700-4200
Polarization		---	(4x) ±45°		
Gain	BASTA	dBi	8.7 ± 1.0	9.3 ± 0.9	10.0 ± 1.0
	MAX	dBi	9.7	10.2	11.0
Azimuth Beamwidth (3 dB)		degrees	360°	360°	360°
Elevation Beamwidth (3 dB)		degrees	12.3° ± 1.4°	11.2° ± 1.0°	10.7° ± 0.9°
Electrical Downtilt		degrees	(y) 2°, 4°, 6°		
Impedance		Ohms	50Ω		
VSWR		---	< 1.5:1		
Passive Intermodulation 3rd Order for 2x20 W Carriers		dBc	< -153		
Upper Sidelobe Suppression		dB	N/A		
Isolation	Intraband	dB	> 25		
	Interband	dB	> 28 same band; > 30 different bands		

### ELECTRICAL SPECIFICATIONS

■ P5 ■ P6


Frequency Range		MHz	(2x) 3300-4200		
Frequency Sub-Range		MHz	3300-3550	3550-3700	3700-4200
Polarization		---	(2x) ±45°		
Gain	BASTA	dBi	7.0 ± 0.7	7.2 ± 0.9	9.3 ± 1.0
	MAX	dBi	7.7	8.1	10.3
Azimuth Beamwidth (3 dB)		degrees	360°	360°	360°
Elevation Beamwidth (3 dB)		degrees	28.6° ± 2.9°	28.6° ± 2.2°	26.5° ± 3.6°
Electrical Downtilt		degrees	2°		
Impedance		Ohms	50Ω		
VSWR		---	< 1.5:1		
Passive Intermodulation 3rd Order for 2x20 W Carriers		dBc	< -153		
Upper Sidelobe Suppression		dB	> 12.2	> 13.3	> 14.1
Isolation	Intraband	dB	> 25		
	Interband	dB	> 28 same band; > 30 different bands		

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 4U6VT360X06F<sub>xy</sub>s4

### MECHANICAL SPECIFICATIONS

Antenna	Height	mm (in)	609 (24.0)
	Diameter	mm (in)	371 (14.6)
Net Weight - Antenna Only		kg (lbs)	15 (33)
Windload	Calculation	km/h (mph)	160 (100)
	Frontal	N (lbf)	191 (43)
Survival Wind Speed		km/h (mph)	241 (150)
Wind Area		m <sup>2</sup> (ft <sup>2</sup> )	0.22 (2.4)
Volume		m <sup>3</sup> (ft <sup>3</sup> )	0.07 (2.3)
Connector	Type	---	(20x) 4.3-10 Female
	Position	---	Bottom
Radome Color		---	Grey (RAL 7035), Brown (RAL 8022), Black (RAL 9011)
Lightning Protection (Grounding Type)		---	Direct Ground

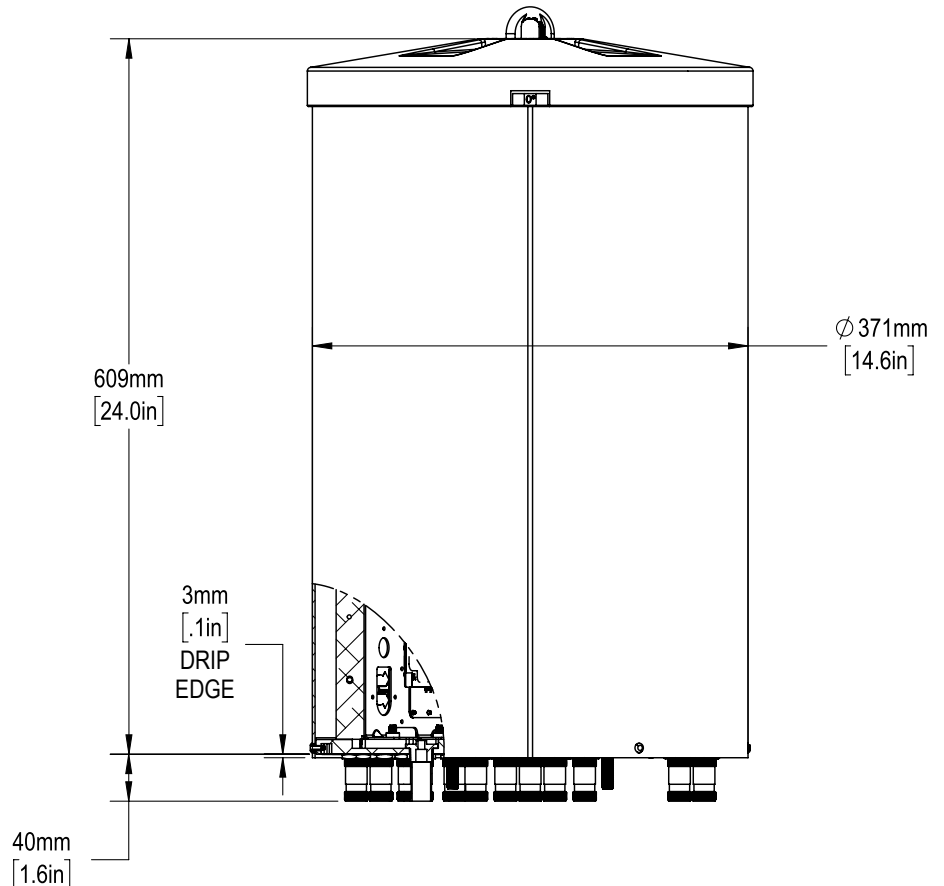


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 4U6VT360X06F<sub>xys</sub>4

### ARRAY LAYOUT Topology


FREQUENCY	ARRAY	CONNECTOR	CONNECTOR TYPE
1695-2700 MHz	■ Y1	1-2	(2x) 4.3-10 Female
1695-2700 MHz	■ Y2	3-4	(2x) 4.3-10 Female
1695-2700 MHz	■ Y3	5-6	(2x) 4.3-10 Female
1695-2700 MHz	■ Y4	7-8	(2x) 4.3-10 Female
3300-4200 MHz	■ P1	9-10	(2x) 4.3-10 Female
3300-4200 MHz	■ P2	11-12	(2x) 4.3-10 Female
3300-4200 MHz	■ P3	13-14	(2x) 4.3-10 Female
3300-4200 MHz	■ P4	15-16	(2x) 4.3-10 Female
3300-4200 MHz	■ P5	17-18	(2x) 4.3-10 Female
3300-4200 MHz	■ P6	19-20	(2x) 4.3-10 Female

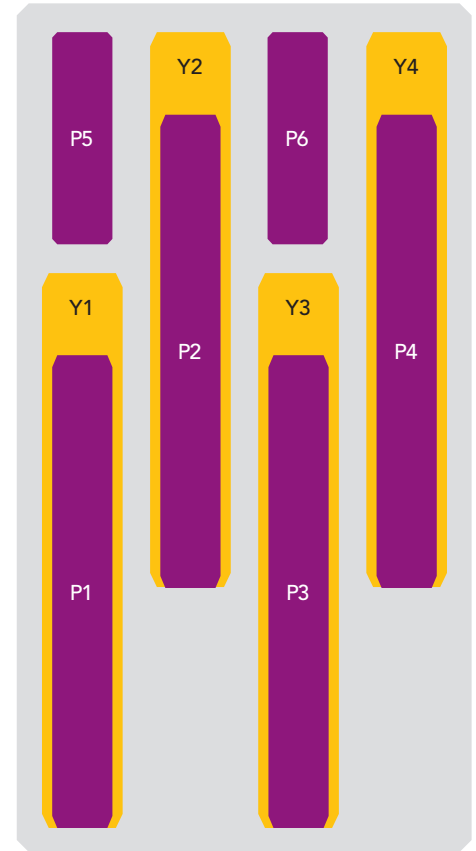

The illustration is not shown to scale.

# 4U6VT360X06FxyS4


## BOTTOM VIEW - LABELING

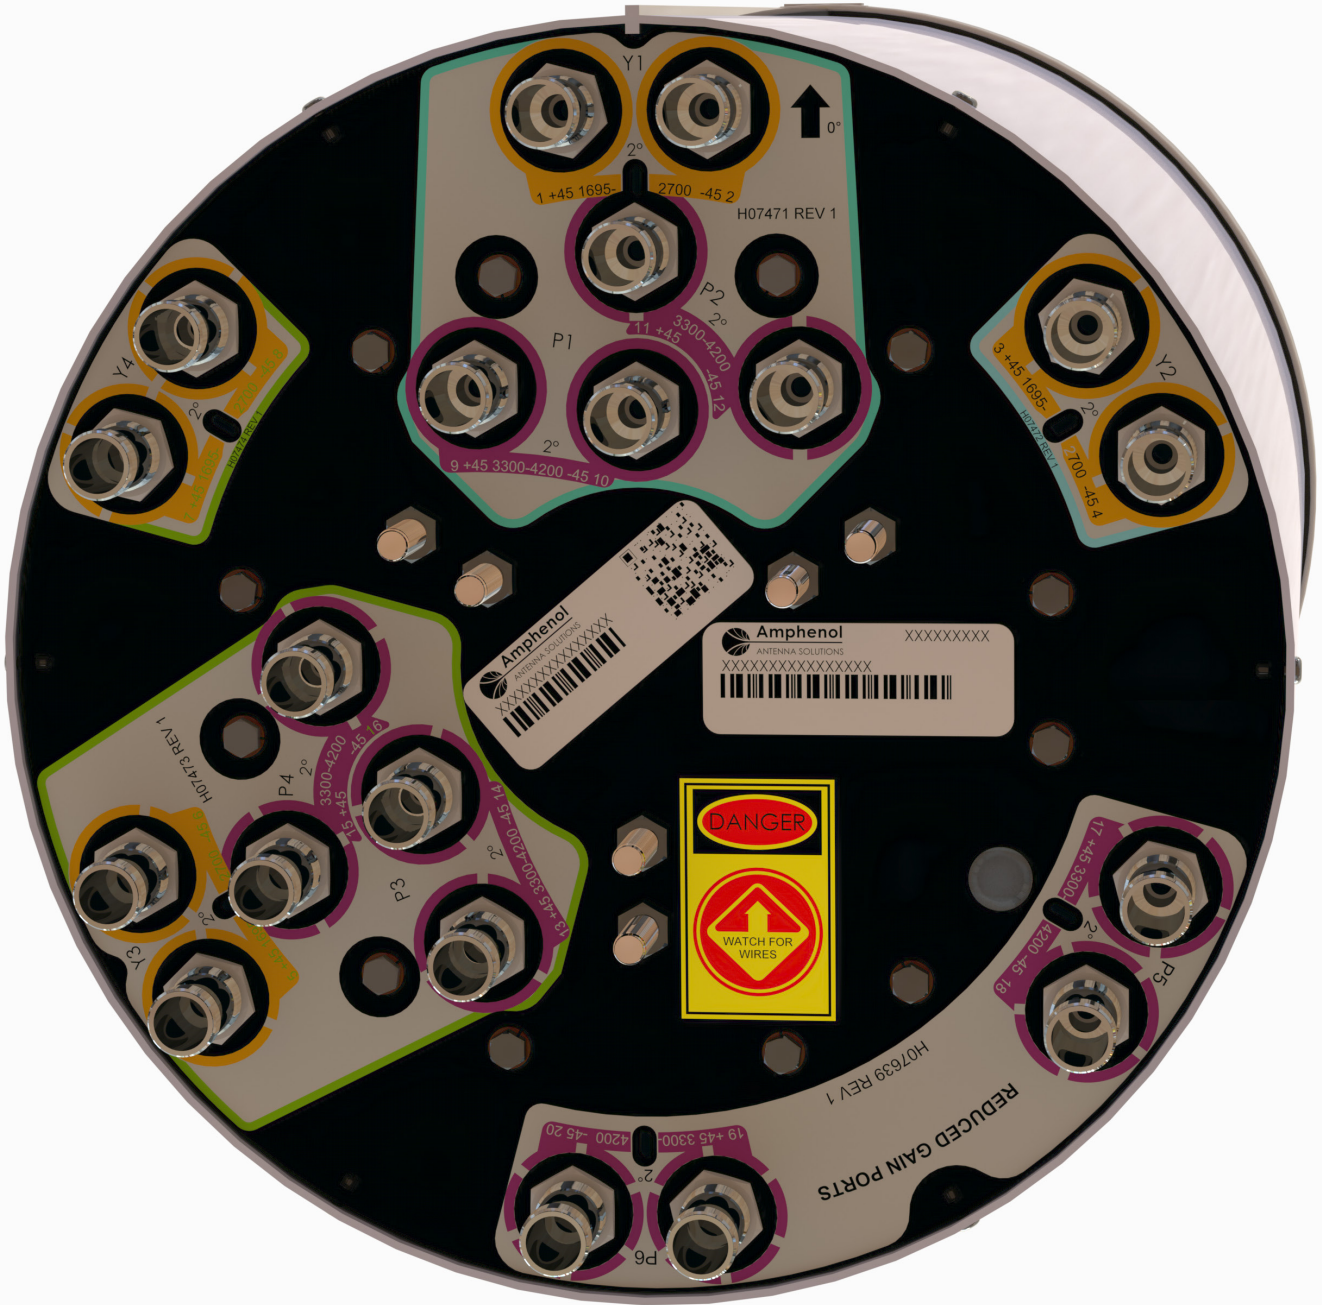

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

# 4U6VT360X06F<sub>xy</sub>s4

## BOTTOM VIEW - CONNECTOR DIAGRAM

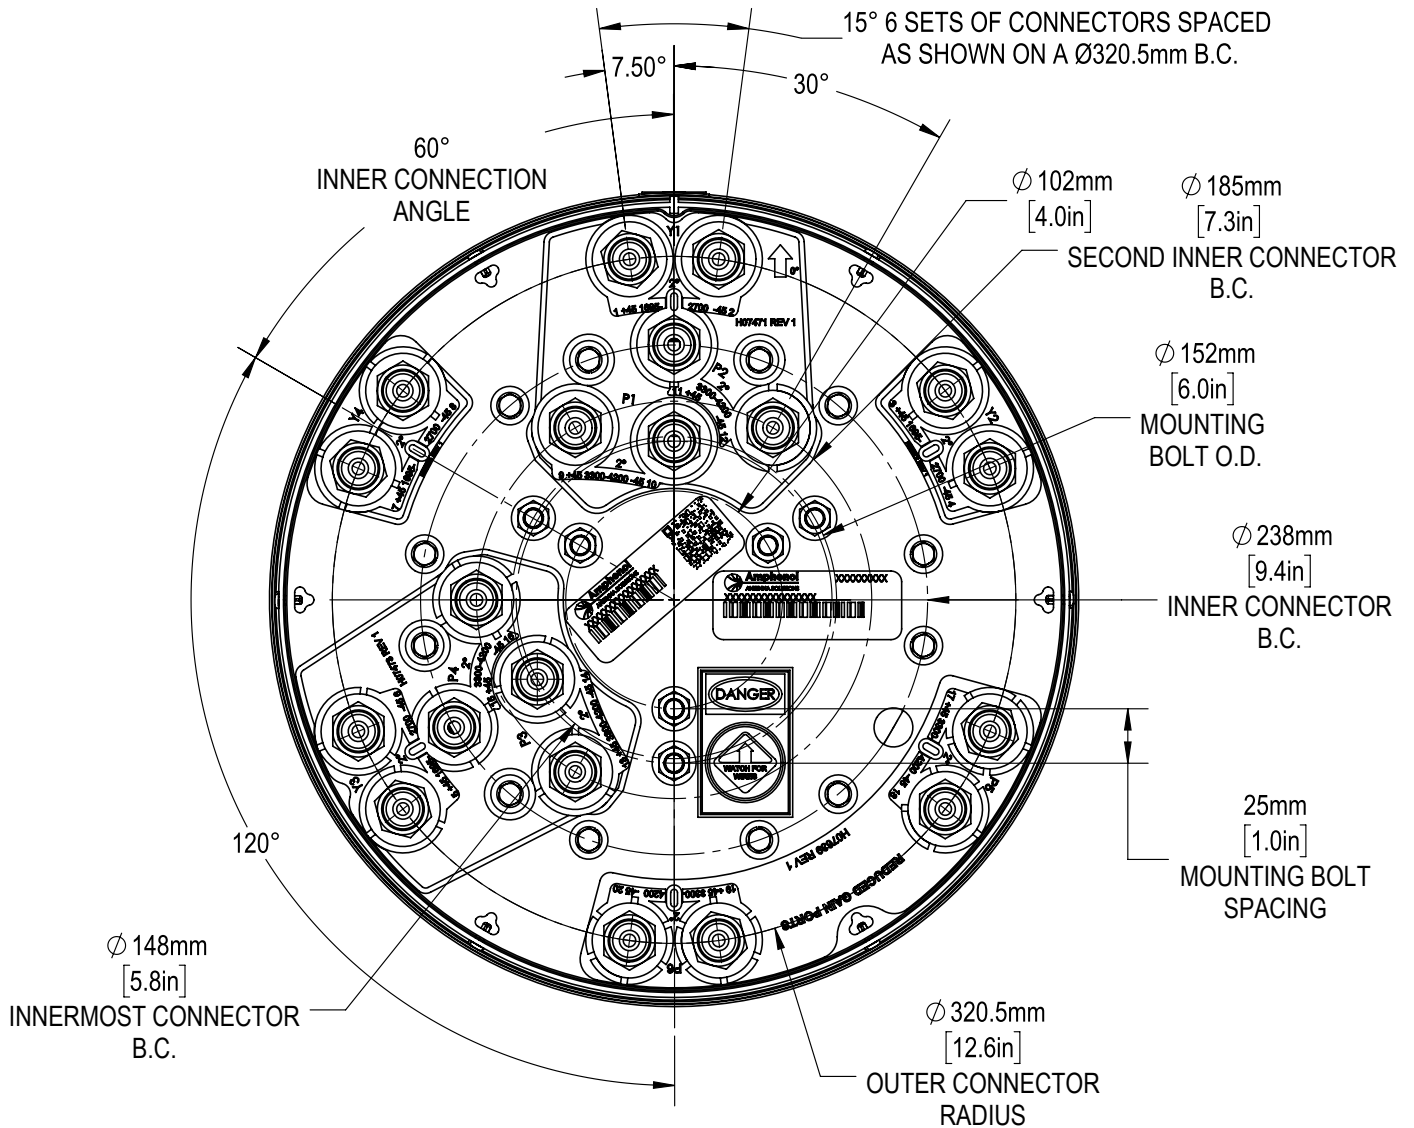

**INSTALLATION** Please read all installation notes before installing this product.



Always attach the antenna using all mounting points.

Do not install the antenna with the connectors facing upwards.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

# 4U6VT360X06F<sub>xy</sub>s4

**MOUNTING KITS** Select from the following mounting options when ordering. Mounting kits for canister antennas are ordered as a separate line item.

MODEL NUMBER	DESCRIPTION
CWT-MKS-SIDE	 <p>SIDE MOUNTING BRACKET KIT FOR CANISTER ANTENNA</p>
CWT-MKS-TOP	 <p>TOP MOUNTING BRACKET KIT FOR CANISTER ANTENNA</p>
WB3X-MKS-01	 <p>UTILITY POLE MOUNTING BRACKET KIT FOR CANISTER ANTENNA</p>
CWT-MKS-BASE-xx	 <p>WIDE DIAMETER POLE TOP MOUNTING BRACKET KIT FOR CANISTER ANTENNA. AVAILABLE IN BROWN, BLACK AND GREY TO MATCH ANTENNA RADOME AND/OR MOUNTING STRUCTURE.</p>

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 4U6VT360X06F<sub>xy</sub>s4

### HOW TO READ THE MODEL NUMBER Each letter and number has meaning.

NUMBER OF BANDS & OPERATING FREQUENCY		PATTERN TYPE	AZIMUTH BMWIDTH	POLARIZATION	LENGTH	TILT TYPE	TILT OPTIONS	CONNECTOR TYPE	VARIATION	RADOME COLOR OPTIONS
4U	6V	T	360	X	06	F	<i>xy</i>	s	4	BK BR
(4x) 1695-2700	(6x) 3300-4200	Tri-Sector	360°	XPOL	0.6 meters	Fixed Tilt	These letters are placeholders for fixed tilt options.  Refer to Electrical Specifications for available tilt options.	4.3-10 Connector	Generation 4 enhanced mechanical package	BK indicates a Black radome.  BR indicates a Brown radome.  The default radome color is Grey. No letters are required for a Grey radome.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 4U6VT360X06F<sub>x</sub>ys4

**ORDERING OPTIONS** Select from the following ordering options


SELECT RADOME COLOR	SELECT DEGREE OF ELECTRICAL DOWNTILT FOR EACH BAND			ANTENNA MODEL
	1695-2700 MHz	3300-4200 MHz	3300-4200 MHz	
Grey RAL 7035	2°	2°	2°	4U6VT360X06F22s4
	2°	4°	2°	4U6VT360X06F24s4
	2°	6°	2°	4U6VT360X06F26s4
	4°	2°	2°	4U6VT360X06F42s4
	4°	4°	2°	4U6VT360X06F44s4
	4°	6°	2°	4U6VT360X06F46s4
	6°	2°	2°	4U6VT360X06F62s4
	6°	4°	2°	4U6VT360X06F64s4
	6°	6°	2°	4U6VT360X06F66s4
Brown RAL 8022	2°	2°	2°	4U6VT360X06F22s4BR
	2°	4°	2°	4U6VT360X06F24s4BR
	2°	6°	2°	4U6VT360X06F26s4BR
	4°	2°	2°	4U6VT360X06F42s4BR
	4°	4°	2°	4U6VT360X06F44s4BR
	4°	6°	2°	4U6VT360X06F46s4BR
	6°	2°	2°	4U6VT360X06F62s4BR
	6°	4°	2°	4U6VT360X06F64s4BR
	6°	6°	2°	4U6VT360X06F66s4BR
Black RAL 9011	2°	2°	2°	4U6VT360X06F22s4BK
	2°	4°	2°	4U6VT360X06F24s4BK
	2°	6°	2°	4U6VT360X06F26s4BK
	4°	2°	2°	4U6VT360X06F42s4BK
	4°	4°	2°	4U6VT360X06F44s4BK
	4°	6°	2°	4U6VT360X06F46s4BK
	6°	2°	2°	4U6VT360X06F62s4BK
	6°	4°	2°	4U6VT360X06F64s4BK
	6°	6°	2°	4U6VT360X06F66s4BK

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


## 4U6VT360X06F<sub>x</sub>ys4




**Y1, 2° TILT**

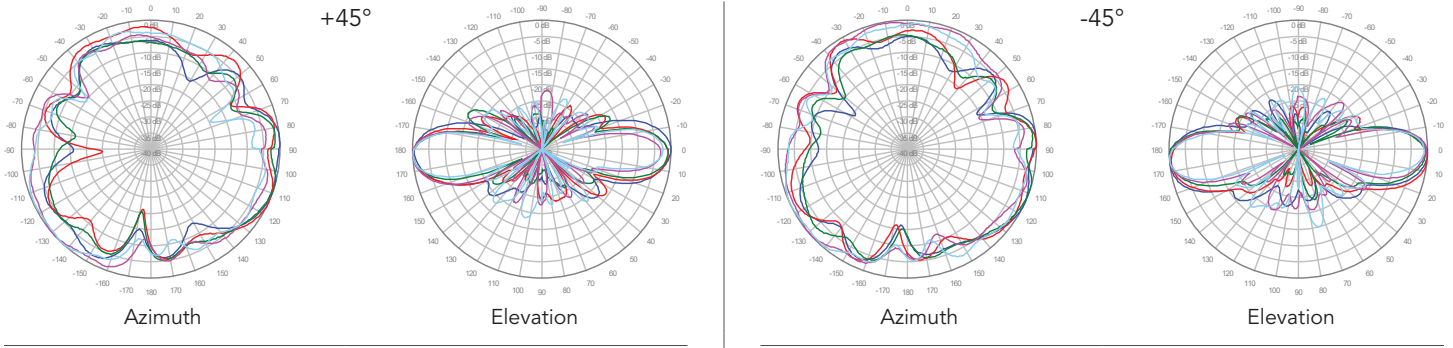


**Y2, 2° TILT**

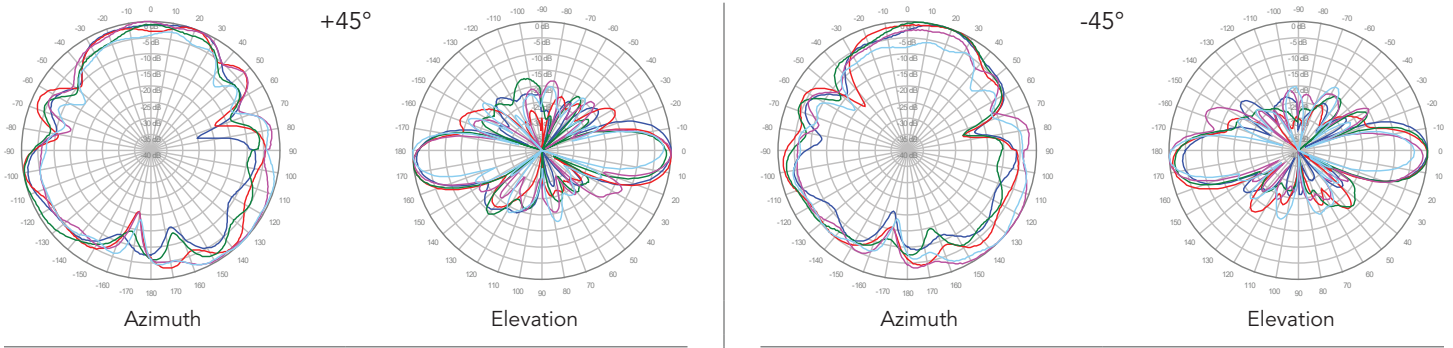

**Y3, 2° TILT**

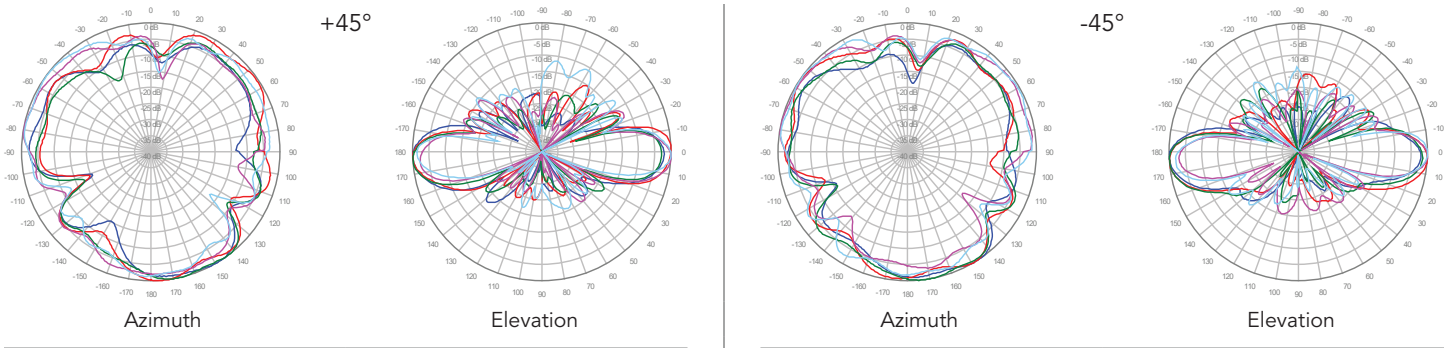


**Y4, 2° TILT**

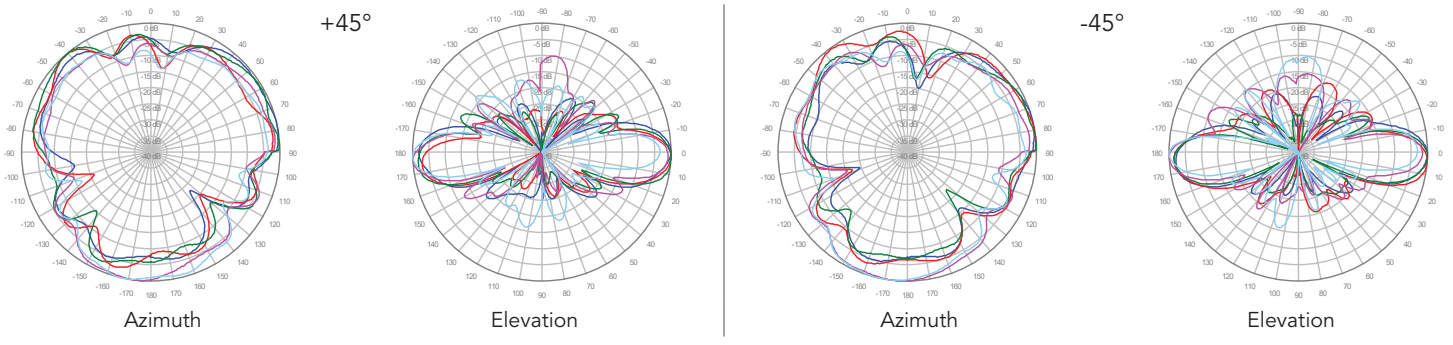


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


## 4U6VT360X06F<sub>xys</sub>4

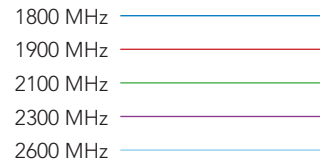


**Y1, 4° TILT**

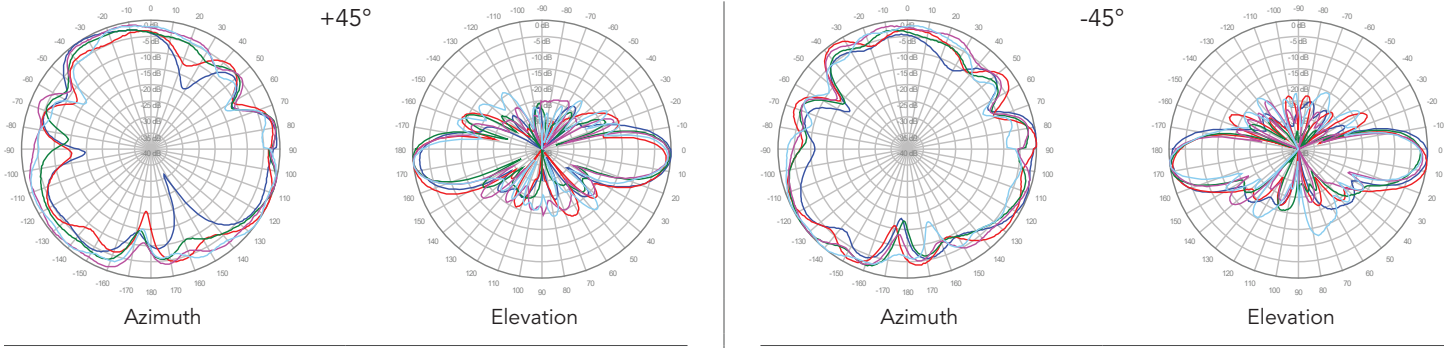


**Y2, 4° TILT**

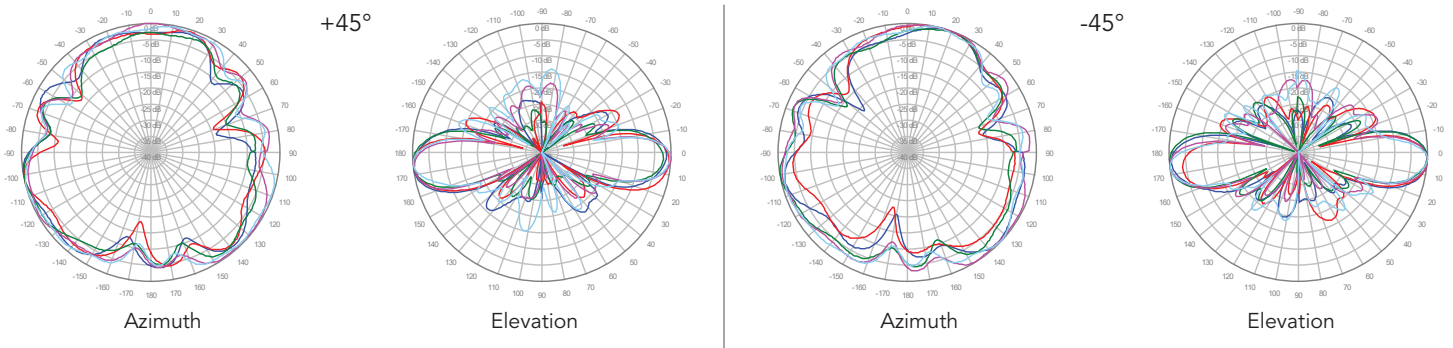

**Y3, 4° TILT**

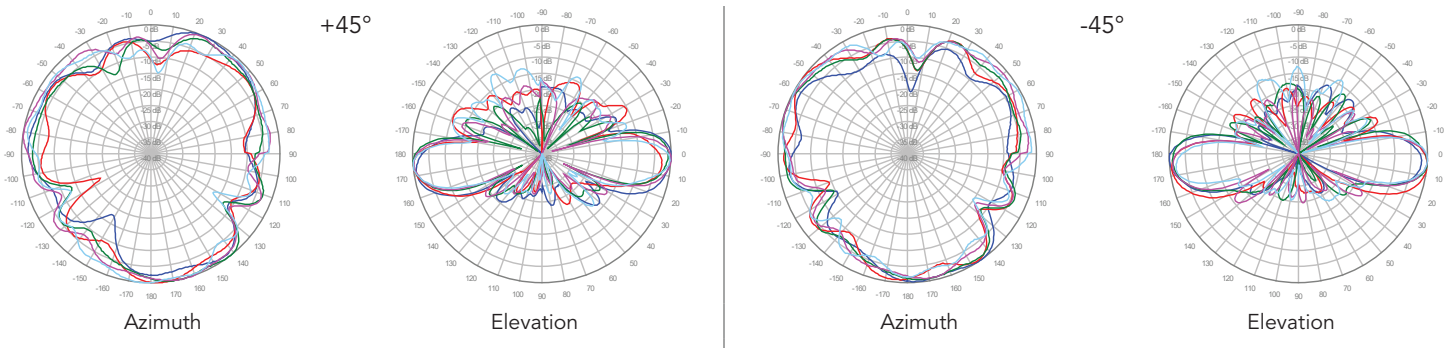


**Y4, 4° TILT**

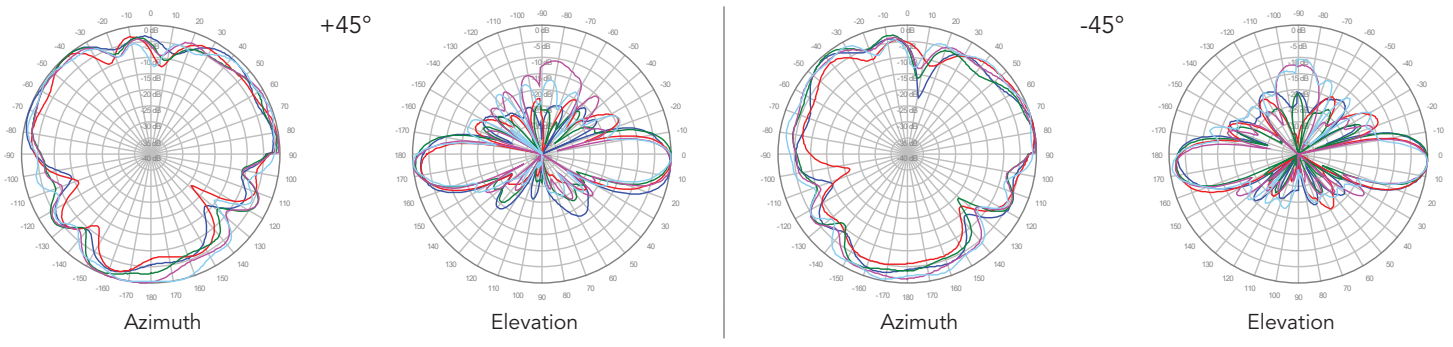


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


## 4U6VT360X06F<sub>xys</sub>4

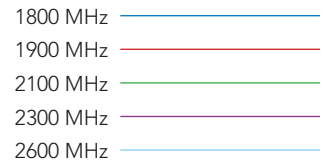


**Y1, 6° TILT**

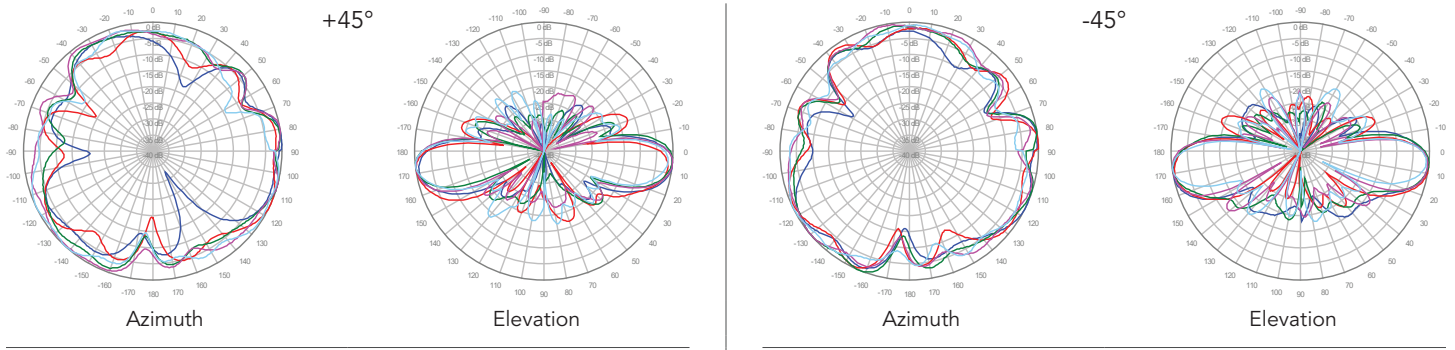


**Y2, 6° TILT**

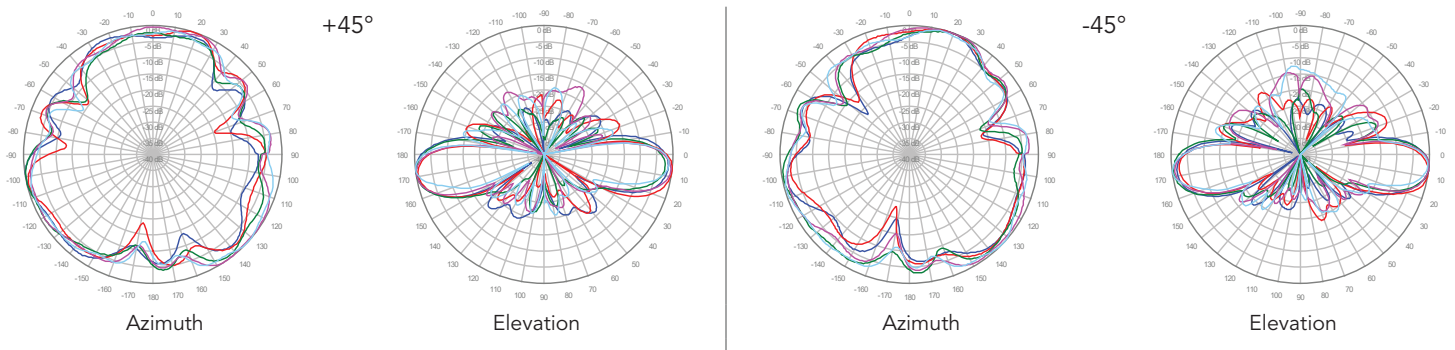

**Y3, 6° TILT**

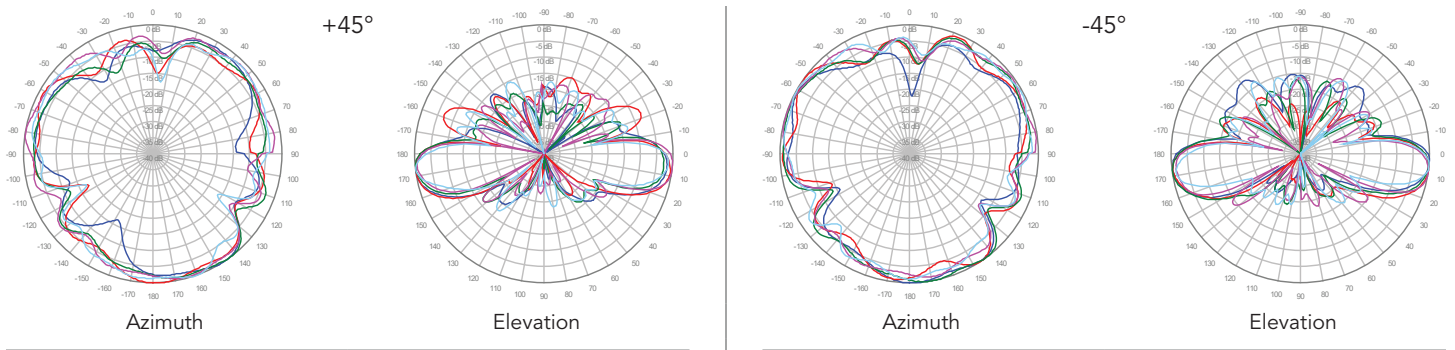

**Y4, 6° TILT**

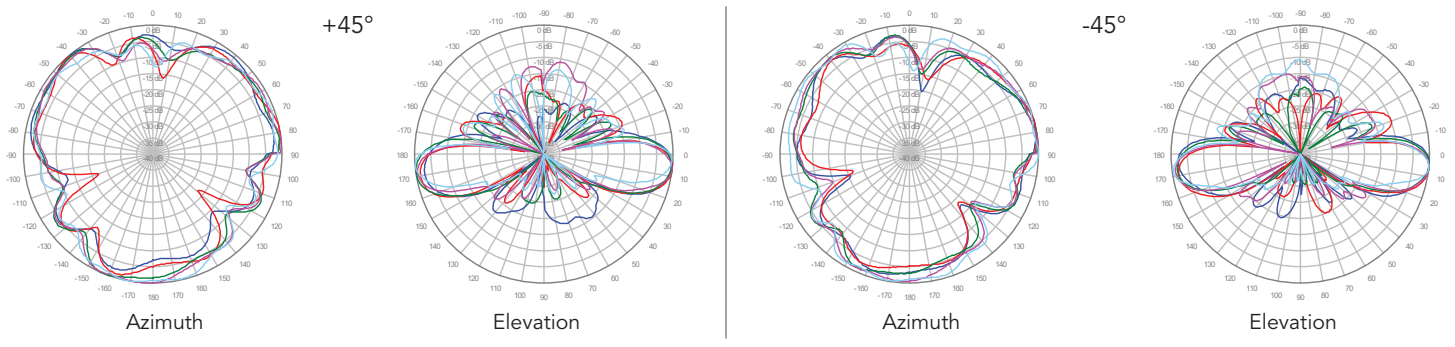


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


3600 MHz ————  
4000 MHz ————

**4U6VT360X06F<sub>x</sub>ys4**


**P1, 2° TILT**

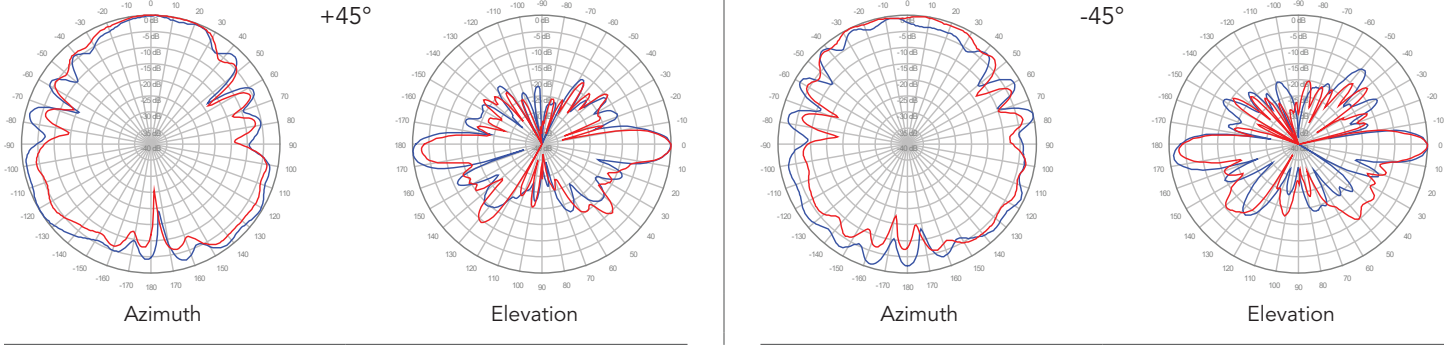


**P2, 2° TILT**

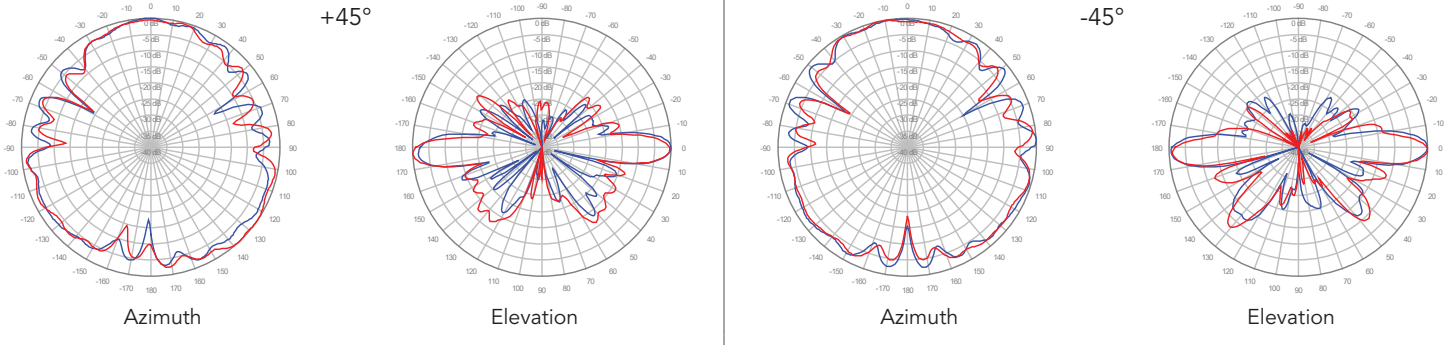

**P3, 2° TILT**

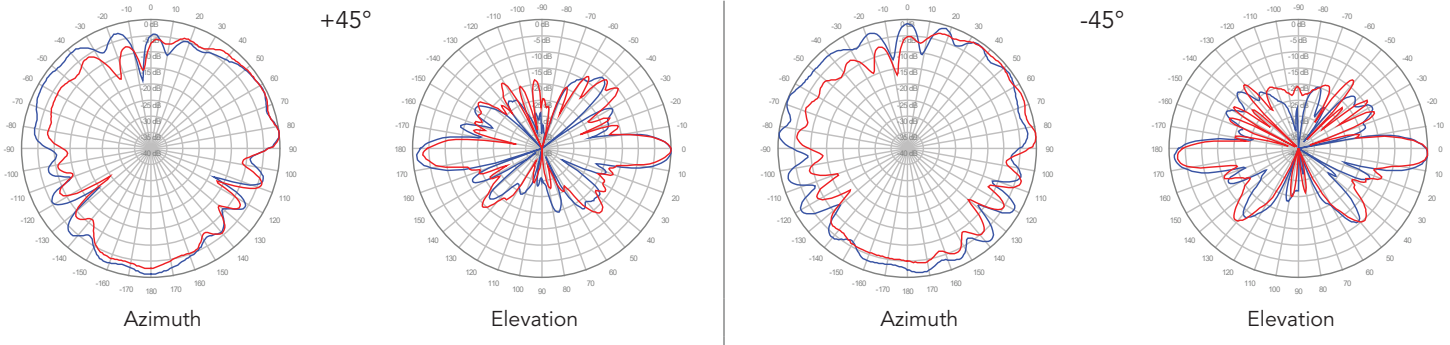

**P4, 2° TILT**

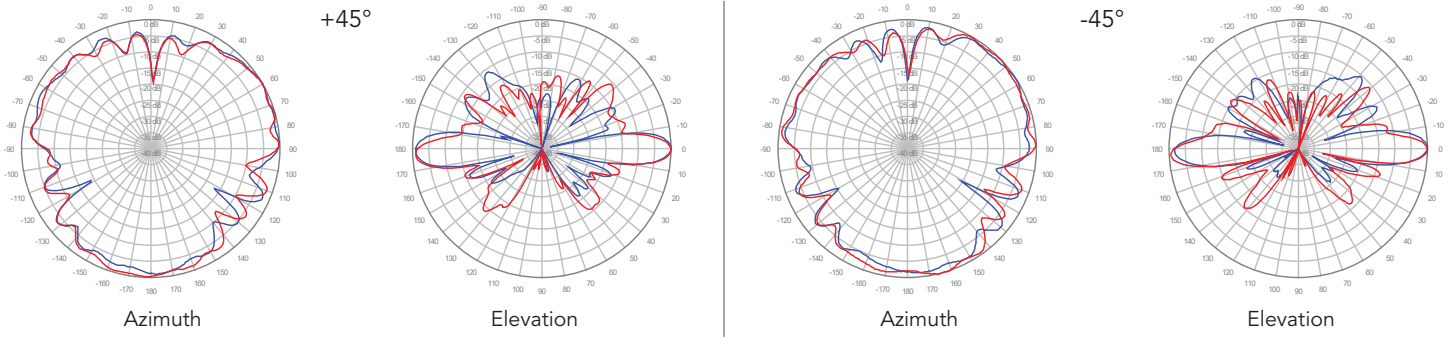


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


3600 MHz ————  
4000 MHz ————

## 4U6VT360X06FxyS4


### P1, 4° TILT

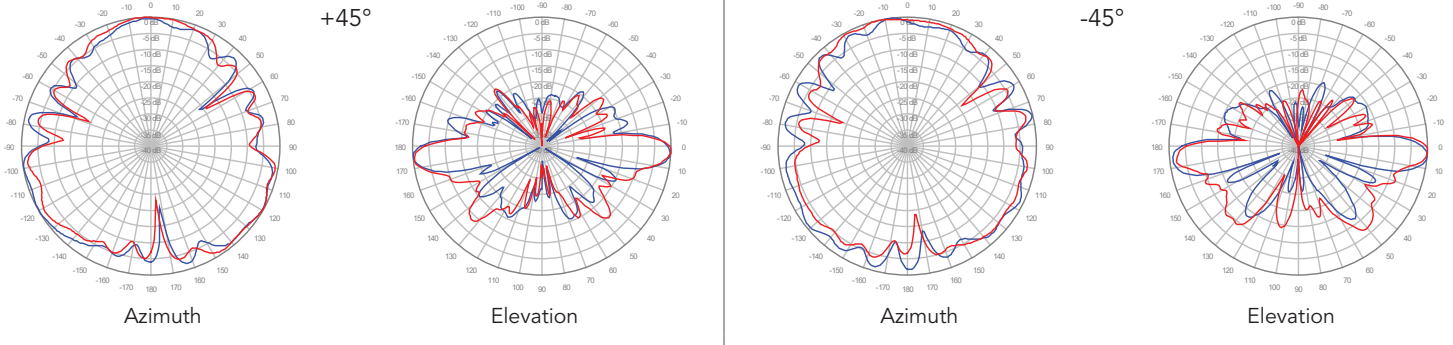


### P2, 4° TILT

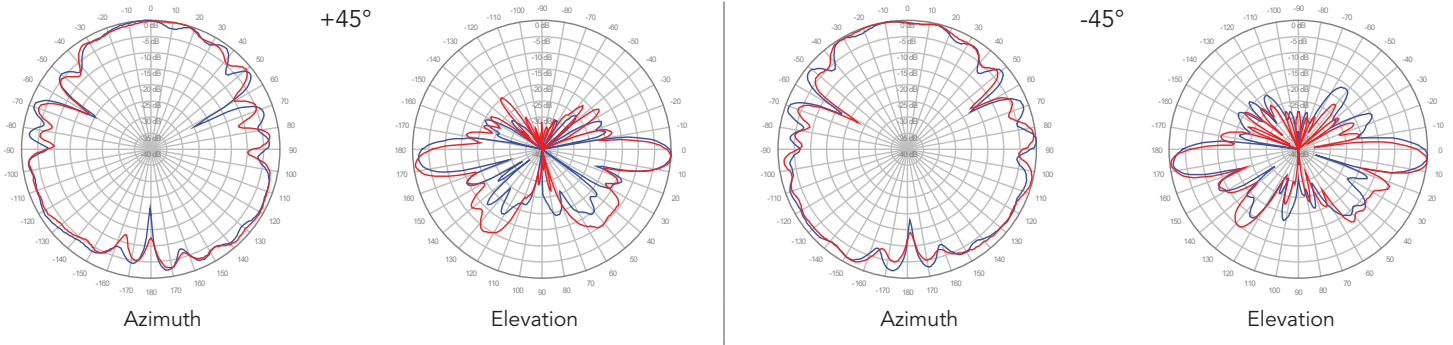

### P3, 4° TILT

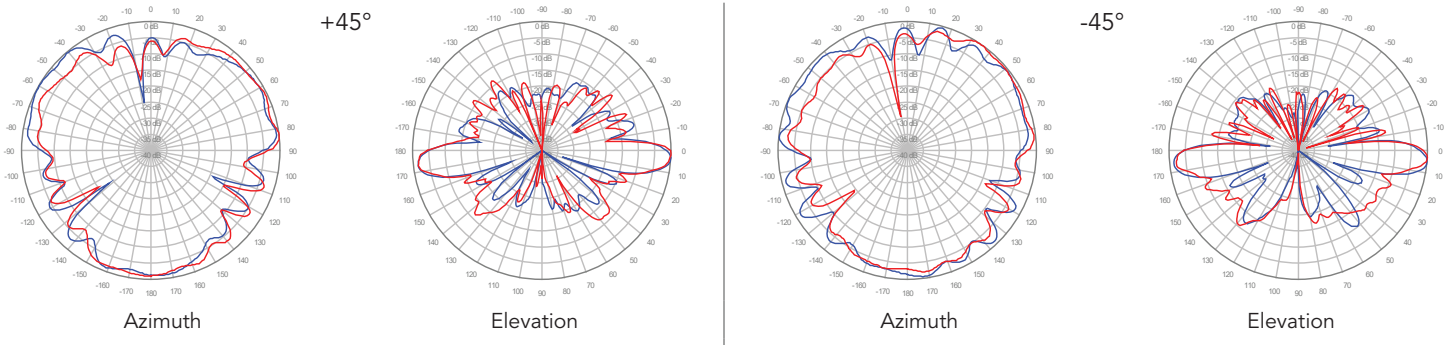


### P4, 4° TILT

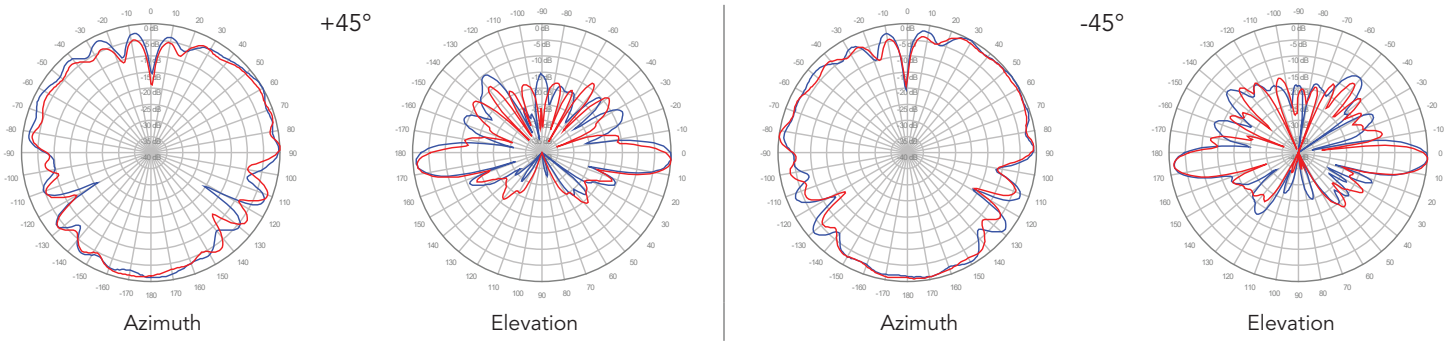


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

## 4U6VT360X06FxyS4


### ■ P1, 6° TILT

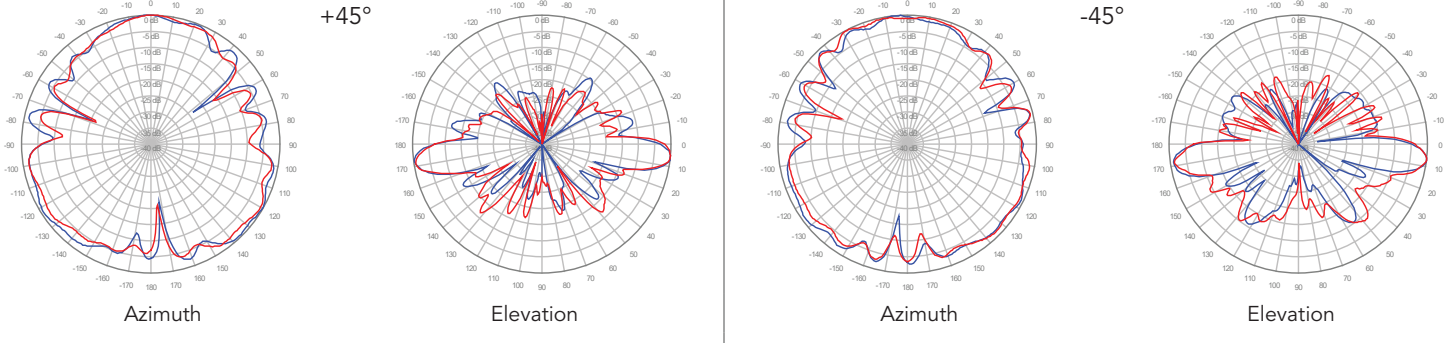


### ■ P2, 6° TILT

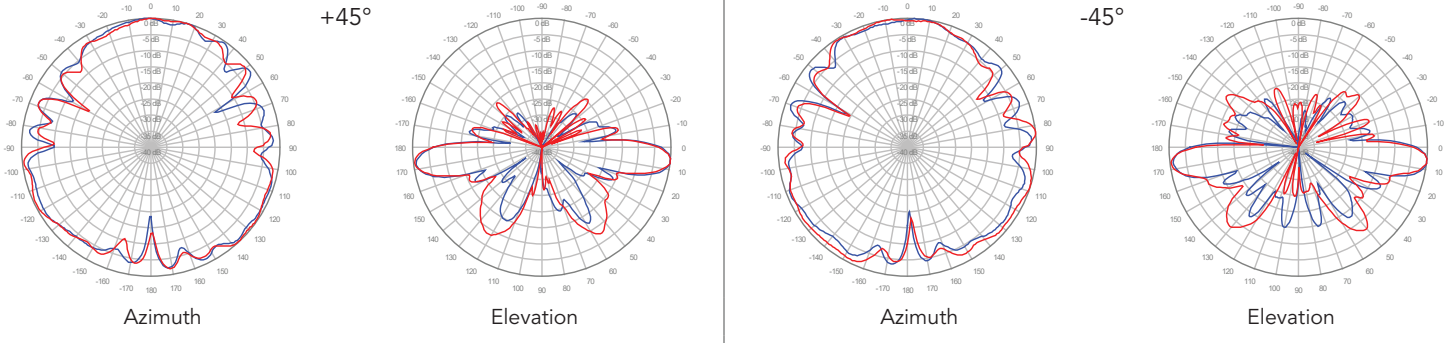

### ■ P3, 6° TILT

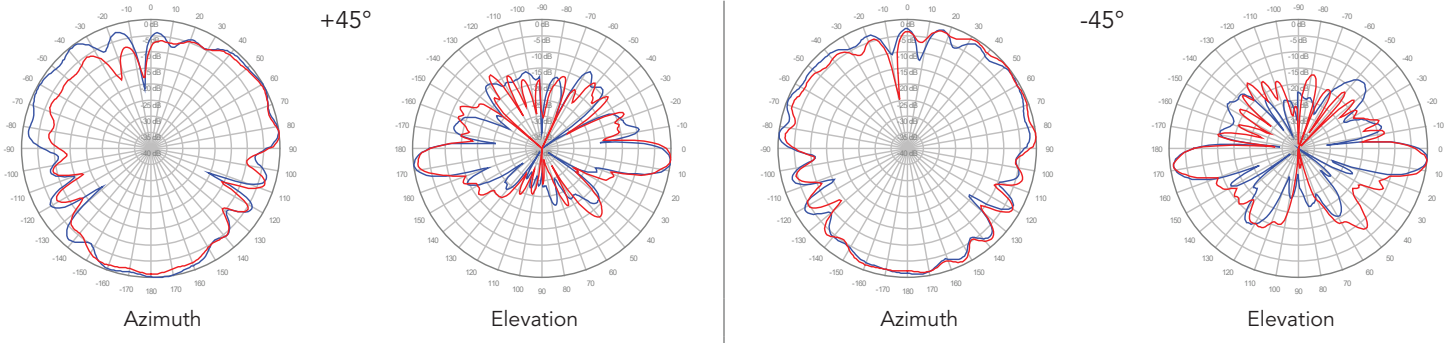

### ■ P4, 6° TILT




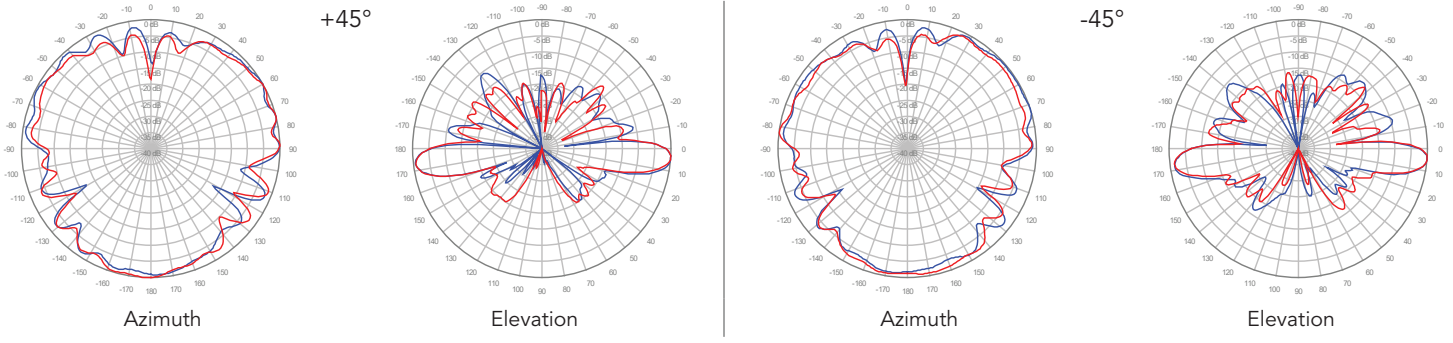


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.





**4U6VT360X06F<sub>x</sub>ys4**

3600 MHz ————  
4000 MHz ————

**P5, 2° TILT**

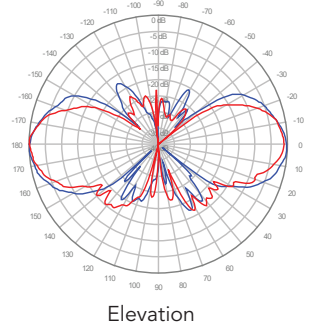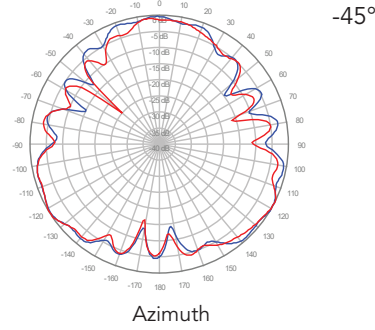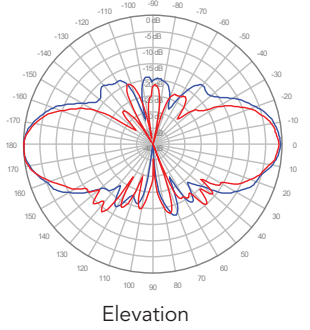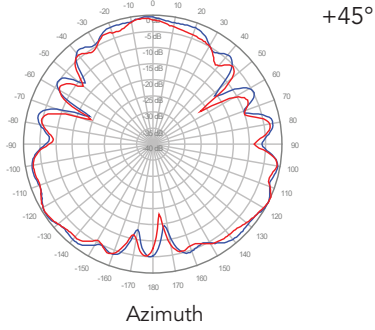

**P6, 2° TILT**

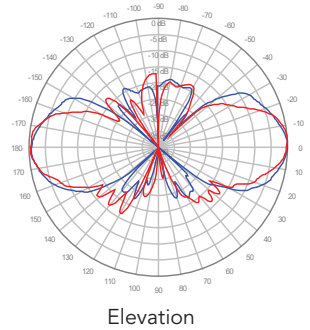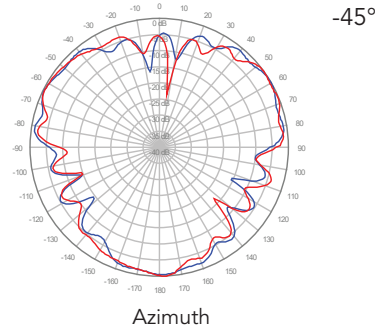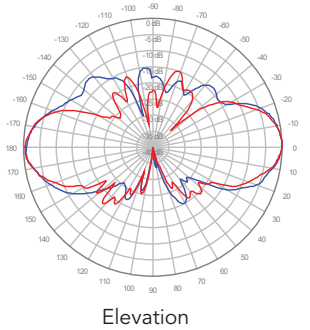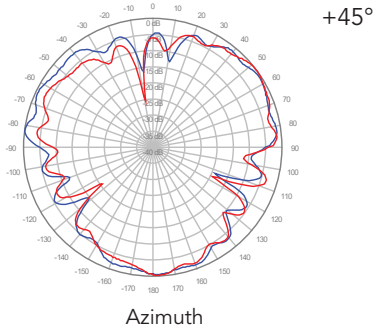

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.