








5980470P-2

5980470PG-2 5980470PDx-2

7-Band, 28-Port, 65°, XPOL, Two-Sector Antenna, Variable Tilt, 3053 mm



- Hepta band, Two-sector antenna, 28 connectors
- Independent tilt on each band 2-10° / 2-10° / 2-12° / 2-12° / 2-12° / 2-12°
- Independent azimuth panning ±5° on each sector
- MET and RET versions, 3GPP/AISG2.0, in multiple single RET (multiple device type1) or in Multi-RET (device type 17, with firmware above MD3.10).
- Our patented RET module to control all tilt angles, fully inserted inside the antenna (field replaceable)

| PRODUCT OVERVIEW | Frequency Range (MHz) | 698-803 | 880-960 | 698-960 | 1427-2690 | 1427-2690 | 1427-2690 | 1427-2690 |
|------------------|-------------------------|--|--|--|--|--|--|--|
| | Array |  R1 |  R2 |  R3 |  Y1 |  Y2 |  Y3 |  Y4 |
| | Connector | 1-2 | 3-4 | 5-6 | 7-8 | 9-10 | 11-12 | 13-14 |
| | Polarization | XPOL | XPOL | XPOL | XPOL | XPOL | XPOL | XPOL |
| | Azimuth Beamwidth (avg) | 65° | 65° | 65° | 65° | 65° | 65° | 65° |
| | Electrical Downtilt | 2-10° | 2-10° | 2-12° | 2-12° | 2-12° | 2-12° | 2-12° |
| | Dimensions | 3053 x Ø750 mm | | | | | | |



ORDERING OPTIONS Select from the different options listed below

| SELECT ELECTRICAL DOWNTILT CONTROL & AISG PROTOCOL | SELECT ACTUATOR | SELECT CONNECTOR TYPE | ANTENNA MODEL NUMBER |
|--|----------------------------------|-----------------------|----------------------|
| Manual Electrical Tilt (MET) | --- | 4.3-10 Female | 5980470P-2 |
| Remote Electrical Tilt (RET) AISG v2.0 / 3GPP | Multi-Device Control Unit (MDCU) | 4.3-10 Female | 5980470PG-2 |
| | Multi-Device Dual Unit (MDDU) | 4.3-10 Female | 5980470PDx*-2 |

*Pre-commissioned configuration; Contact Amphenol for further details.



Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

5980470P-2

5980470PG-2 5980470PDx-2

7-Band, 28-Port, 65°, XPOL, Two-Sector Antenna, Variable Tilt, 3053 mm

ELECTRICAL SPECIFICATIONS Low Band

R1

| | | | |
|---|---------------------|---------|--------------|
| Frequency Range | | MHz | 698-803 |
| Polarization | | --- | ±45° |
| Gain | Over all Tilts | dBi | 15.5 ± 0.5 |
| Azimuth Beamwidth | | degrees | 71.5° ± 3.5° |
| Elevation Beamwidth | | degrees | 8.6° ± 0.6° |
| Electrical Downtilt | | degrees | 2°-10° |
| Impedance | | Ohms | 50 |
| VSWR | | --- | < 1.5 |
| Passive Intermodulation 3rd Order for 2 x 20W Carriers | | dBm | < -110 |
| Front-to-Back Ratio, Total Power, ±30° | | dB | > 20.8 |
| Upper Sidelobe Suppression, Peak to 20° | | dB | > 13.7 |
| Cross Polar Ratio | Main Direction (0°) | dB | > 15.7 |
| | Sector Edges (±60°) | dB | > 6.3 |
| Maximum Effective Power Per Port | | Watts | 250 |
| Inter/Intra Band Isolation | | dB | > 25 |

Standard values based on NGMN-P-BASTA version 10.0 recommendation.

ELECTRICAL SPECIFICATIONS Low Band

R2

| | | | |
|---|---------------------|---------|--------------|
| Frequency Range | | MHz | 880-960 |
| Polarization | | --- | ±45° |
| Gain | Over all Tilts | dBi | 16.7 ± 0.5 |
| Azimuth Beamwidth | | degrees | 66.5° ± 2.6° |
| Elevation Beamwidth | | degrees | 6.8° ± 0.5° |
| Electrical Downtilt | | degrees | 2°-10° |
| Impedance | | Ohms | 50 |
| VSWR | | --- | < 1.5 |
| Passive Intermodulation 3rd Order for 2 x 20W Carriers | | dBm | < -110 |
| Front-to-Back Ratio, Total Power, ±30° | | dB | > 22.5 |
| Upper Sidelobe Suppression, Peak to 20° | | dB | > 15.4 |
| Cross Polar Ratio | Main Direction (0°) | dB | > 16.4 |
| | Sector Edges (±60°) | dB | > 6.8 |
| Maximum Effective Power Per Port | | Watts | 250 |
| Inter/Intra Band Isolation | | dB | > 25 |

Standard values based on NGMN-P-BASTA version 10.0 recommendation.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

5980470P-2

5980470PG-2 5980470PDx-2

7-Band, 28-Port, 65°, XPOL, Two-Sector Antenna, Variable Tilt, 3053 mm

ELECTRICAL SPECIFICATIONS Ultra Low Band

R3

| | | | | | | |
|--|---------------------|---------|--------------|--------------|--------------|--------------|
| Frequency Range | | MHz | 698-960 | | | |
| | | MHz | 698-806 | 790-862 | 824-894 | 880-960 |
| Polarization | | --- | ±45° | | | |
| Gain | Over all Tilts | dBi | 15.1 ± 0.5 | 16.1 ± 0.4 | 16.4 ± 0.5 | 16.7 ± 0.4 |
| Azimuth Beamwidth | | degrees | 74.9° ± 2.8° | 69.2° ± 5.5° | 67.7° ± 2.9° | 66.1° ± 3.0° |
| Elevation Beamwidth | | degrees | 8.5° ± 0.7° | 7.6° ± 0.6° | 7.5° ± 0.6° | 6.9° ± 0.6° |
| Electrical Downtilt | | degrees | 2°-12° | | | |
| Impedance | | Ohms | 50 | | | |
| VSWR | | --- | < 1.5 | | | |
| Passive Intermodulation 3rd Order for 2 x 20W Carriers | | dBm | < -110 | | | |
| Front-to-Back Ratio, Total Power, ±30° | | dB | > 26.3 | > 27.0 | > 26.3 | > 26.4 |
| Upper Sidelobe Suppression, Peak to 20° | | dB | > 17.3 | > 17.0 | > 16.9 | > 14.5 |
| Cross Polar Ratio | Main Direction (0°) | dB | > 18.7 | > 21.3 | > 20.6 | > 16.9 |
| | Sector Edges (±60°) | dB | > 8.6 | > 5.8 | > 6.0 | > 7.4 |
| Maximum Effective Power Per Port | | Watts | 250 W | | | |
| Inter/Intra Band Isolation | | dB | > 25 dB | | | |

Standard values based on NGMN-P-BASTA version 10.0 recommendation.

ELECTRICAL SPECIFICATIONS MEGA Wide Band

Y1

| | | | | | | | |
|--|---------------------|---------|--------------|--------------|--------------|--------------|---------------------------|
| Frequency Range | | MHz | 1427-2690 | | | | |
| | | MHz | 1427-1518 | 1695-1880 | 1850-1990 | 1920-2180 | 2300-2500 2490-2690 |
| Polarization | | --- | ±45° | | | | |
| Gain | Over all Tilts | dBi | 16.0 ± 0.2 | 16.4 ± 0.4 | 16.8 ± 0.4 | 17.2 ± 0.4 | 16.8 ± 0.5 17.0 ± 0.4 |
| Azimuth Beamwidth | | degrees | 73.2° ± 3.1° | 69.0° ± 3.8° | 66.7° ± 2.4° | 64.3° ± 5.0° | 63.6° ± 4.8° 59.1° ± 4.3° |
| Elevation Beamwidth | | degrees | 8.8° ± 0.4° | 7.5° ± 0.4° | 6.9° ± 0.4° | 6.4° ± 0.6° | 5.6° ± 0.2° 5.1° ± 0.3° |
| Electrical Downtilt | | degrees | 2°-12° | | | | |
| Impedance | | Ohms | 50 | | | | |
| VSWR | | --- | < 1.5 | | | | |
| Passive Intermodulation 3rd Order for 2 x 20W Carriers | | dBm | < -110 | | | | |
| Front-to-Back Ratio, Total Power, ±30° | | dB | > 25.2 | > 29.9 | > 30.9 | > 30.6 | > 28.1 > 29.4 |
| Upper Sidelobe Suppression, Peak to 20° | | dB | > 13.6 | > 19.3 | > 18.8 | > 17.2 | > 15.5 > 14.9 |
| Cross Polar Ratio | Main Direction (0°) | dB | > 14.4 | > 18.2 | > 17.0 | > 16.0 | > 19.9 > 13.8 |
| | Sector Edges (±60°) | dB | > 10.0 | > 6.6 | > 7.1 | > 7.7 | > 6.6 > 6.9 |
| Maximum Effective Power Per Port | | Watts | 200 W | | | | |
| Inter/Intra Band Isolation | | dB | > 25 | | | | |

Standard values based on NGMN-P-BASTA version 10.0 recommendation.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

5980470P-2

5980470PG-2 5980470PDx-2

7-Band, 28-Port, 65°, XPOL, Two-Sector Antenna, Variable Tilt, 3053 mm

ELECTRICAL SPECIFICATIONS MEGA Wide Band

Y2

| Frequency Range | | MHz | 1427-2690 | | | | | |
|---|---------------------|---------|--------------|--------------|--------------|--------------|--------------|--------------|
| | | MHz | 1427-1518 | 1695-1880 | 1850-1990 | 1920-2180 | 2300-2500 | 2490-2690 |
| Polarization | | --- | ±45° | | | | | |
| Gain | Over all Tilts | dBi | 16.1 ± 0.1 | 16.4 ± 0.4 | 16.8 ± 0.5 | 17.2 ± 0.4 | 16.8 ± 0.4 | 17.2 ± 0.4 |
| Azimuth Beamwidth | | degrees | 72.3° ± 3.7° | 67.8° ± 3.7° | 66.2° ± 2.6° | 64.5° ± 4.2° | 63.5° ± 3.9° | 58.8° ± 4.6° |
| Elevation Beamwidth | | degrees | 8.8° ± 0.5° | 7.4° ± 0.4° | 6.9° ± 0.3° | 6.5° ± 0.6° | 5.5° ± 0.3° | 5.1° ± 0.3° |
| Electrical Downtilt | | degrees | 2°-12° | | | | | |
| Impedance | | Ohms | 50 | | | | | |
| VSWR | | --- | < 1.5 | | | | | |
| Passive Intermodulation 3rd Order for 2 x 20W Carriers | | dBm | < -110 | | | | | |
| Front-to-Back Ratio, Total Power, ±30° | | dB | > 25.2 | > 29.3 | > 30.6 | > 30.1 | > 27.1 | > 29.4 |
| Upper Sidelobe Suppression, Peak to 20° | | dB | > 15.9 | > 19.4 | > 21.3 | > 19.7 | > 15.5 | > 15.3 |
| Cross Polar Ratio | Main Direction (0°) | dB | > 13.3 | > 17.3 | > 15.6 | > 15.6 | > 21.1 | > 17.4 |
| | Sector Edges (±60°) | dB | > 8.8 | > 7.2 | > 7.1 | > 7.2 | > 7.4 | > 6.9 |
| Maximum Effective Power Per Port | | Watts | 200 W | | | | | |
| Inter/Intra Band Isolation | | dB | > 25 | | | | | |

Standard values based on NGMN-P-BASTA version 10.0 recommendation.

ELECTRICAL SPECIFICATIONS MEGA Wide Band

Y3

| Frequency Range | | MHz | 1427-2690 | | | | | |
|---|---------------------|---------|--------------|--------------|--------------|--------------|--------------|--------------|
| | | MHz | 1427-1518 | 1695-1880 | 1850-1990 | 1920-2180 | 2300-2500 | 2490-2690 |
| Polarization | | --- | ±45° | | | | | |
| Gain | Over all Tilts | dBi | 16.0 ± 0.2 | 16.3 ± 0.4 | 16.7 ± 0.4 | 17.1 ± 0.5 | 16.8 ± 0.4 | 17.1 ± 0.4 |
| Azimuth Beamwidth | | degrees | 72.7° ± 3.1° | 68.3° ± 4.3° | 67.2° ± 3.0° | 65.3° ± 4.4° | 65.2° ± 4.3° | 58.5° ± 5.0° |
| Elevation Beamwidth | | degrees | 8.8° ± 0.5° | 7.5° ± 0.4° | 6.9° ± 0.4° | 6.4° ± 0.6° | 5.7° ± 0.2° | 5.1° ± 0.3° |
| Electrical Downtilt | | degrees | 2°-12° | | | | | |
| Impedance | | Ohms | 50 | | | | | |
| VSWR | | --- | < 1.5 | | | | | |
| Passive Intermodulation 3rd Order for 2 x 20W Carriers | | dBm | < -110 | | | | | |
| Front-to-Back Ratio, Total Power, ±30° | | dB | > 26.4 | > 30.1 | > 29.7 | > 29.0 | > 28.9 | > 28.6 |
| Upper Sidelobe Suppression, Peak to 20° | | dB | > 14.0 | > 20.0 | > 19.3 | > 17.8 | > 16.7 | > 15.7 |
| Cross Polar Ratio | Main Direction (0°) | dB | > 14.2 | > 16.4 | > 16.0 | > 15.2 | > 18.5 | > 15.4 |
| | Sector Edges (±60°) | dB | > 9.9 | > 6.8 | > 7.7 | > 7.7 | > 7.4 | > 7.1 |
| Maximum Effective Power Per Port | | Watts | 200 W | | | | | |
| Inter/Intra Band Isolation | | dB | > 25 | | | | | |

Standard values based on NGMN-P-BASTA version 10.0 recommendation.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

5980470P-2

5980470PG-2 5980470PDx-2

7-Band, 28-Port, 65°, XPOL, Two-Sector Antenna, Variable Tilt, 3053 mm

ELECTRICAL SPECIFICATIONS MEGA Wide Band

Y4

| Frequency Range | | MHz | 1427-2690 | | | | | |
|---|---------------------|---------|--------------|--------------|--------------|--------------|--------------|--------------|
| | | MHz | 1427-1518 | 1695-1880 | 1850-1990 | 1920-2180 | 2300-2500 | 2490-2690 |
| Polarization | | --- | ±45° | | | | | |
| Gain | Over all Tilts | dBi | 16.0 ± 0.1 | 16.4 ± 0.4 | 16.7 ± 0.5 | 17.1 ± 0.5 | 16.8 ± 0.4 | 17.1 ± 0.5 |
| Azimuth Beamwidth | | degrees | 72.2° ± 4.6° | 68.9° ± 4.9° | 66.5° ± 2.7° | 65.0° ± 4.4° | 64.4° ± 2.8° | 59.9° ± 4.0° |
| Elevation Beamwidth | | degrees | 8.8° ± 0.6° | 7.4° ± 0.4° | 7.0° ± 0.4° | 6.5° ± 0.7° | 5.6° ± 0.3° | 5.0° ± 0.3° |
| Electrical Downtilt | | degrees | 2°-12° | | | | | |
| Impedance | | Ohms | 50 | | | | | |
| VSWR | | --- | < 1.5 | | | | | |
| Passive Intermodulation 3rd Order for 2 x 20W Carriers | | dBm | < -110 | | | | | |
| Front-to-Back Ratio, Total Power, ±30° | | dB | > 25.1 | > 29.2 | > 30.9 | > 29.3 | > 29.6 | > 27.1 |
| Upper Sidelobe Suppression, Peak to 20° | | dB | > 13.8 | > 20.1 | > 20.5 | > 19.5 | > 15.9 | > 16.2 |
| Cross Polar Ratio | Main Direction (0°) | dB | > 13.1 | > 17.5 | > 15.0 | > 16.1 | > 19.9 | > 14.6 |
| | Sector Edges (±60°) | dB | > 9.6 | > 7.4 | > 7.5 | > 7.9 | > 8.7 | > 7.1 |
| Maximum Effective Power Per Port | | Watts | 200 W | | | | | |
| Inter/Intra Band Isolation | | dB | > 25 | | | | | |

Standard values based on NGMN-P-BASTA version 10.0 recommendation.

5980470P-2

5980470PG-2 5980470PDx-2

7-Band, 28-Port, 65°, XPOL, Two-Sector Antenna, Variable Tilt, 3053 mm

ELECTRICAL DOWNTILT CONTROL

For multiband antennas, electrical downtilt for each band can be controlled separately.

Manual Electrical Tilt (MET) Control

A colored knob at the end of the tilt indicator allows change of the tilt without need of a tool. The knob color is identical to the corresponding connector color. The manual tilt 'override' function is always available with no need to remove the physical RET motor. If you want to change the Tilt Manually, push and turn the knob.

Remote Electrical Tilt (RET) Control

The remote control of the electrical tilt is managed by a Multi-Device Control Unit (MDCU) or a Multi-Device Dual Unit (MDDU) inserted in the bottom of the antenna. See details below and refer to the ordering options to see which actuators are available with this particular antenna. A single actuator individually controls the tilt of each band (no need for daisy chain cables between the bands). This module does not add any additional length to the antenna.

RET ACTUATOR

Amphenol's **RET-READY** antennas are delivered with the RET Actuator already installed and pre-commissioned with all antenna parameters. Every RET device is factory configured and calibrated so the antenna is ready to be used once delivered to the site which means that there is no need for further installation of RET devices or for programming their configuration or for running a calibration process.

RET-READY ACTUATORS



Multi-Device Control Unit (MDCU). The MDCU is an electronic module that allows the remote control of the electrical downtilt (RET) in Amphenol antennas with factory embedded motors. The MDCU is factory installed. *Refer to the ORDERING OPTIONS for availability with this model.*
Multi-Device Dual Unit (MDDU). The MDDU allows two separate RET Controllers to independently drive the RETs in antennas with factory embedded motors (for antenna sharing or two technologies). The MDDU is factory installed. *Refer to the ORDERING OPTIONS for availability with this model.*

| | | |
|-------------------------------|---------------------------|--|
| Number of RET-READY Actuators | | One per antenna |
| Input Voltage | | +10 to +30 V |
| Power Consumption | Idle State (AISG P1) | 0.5 W |
| | High Power Mode (AISG P2) | 3 W |
| Protocol | | 3GPP/AISG 2.0 |
| Tilt Change Duration | | Less than 15 seconds, typical (may vary dependent on antenna type and outdoor temperature) |
| Precision | | ±0.5° |
| Tilt Change Capability | | 50,000 minimum |
| RET Interface | MDCU | One pair of AISG Male and Female (type IEC60130-9) |
| | MDDU | Two male AISG 8 pin connectors (type IEC60130-9 Ed 3.0) |
| Field Replaceable Unit | | Yes |

5980470P-2

5980470PG-2 5980470PDx-2

7-Band, 28-Port, 65°, XPOL, Two-Sector Antenna, Variable Tilt, 3053 mm

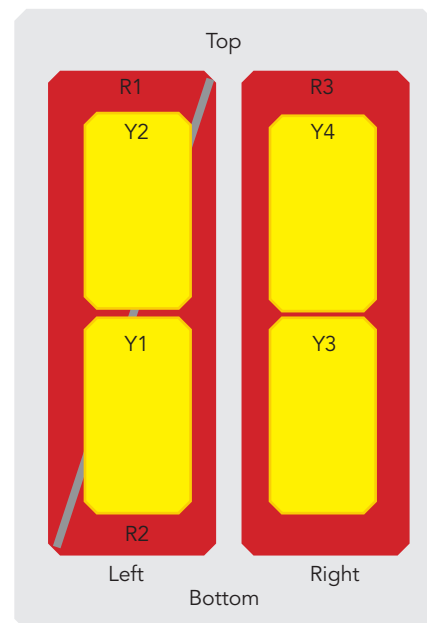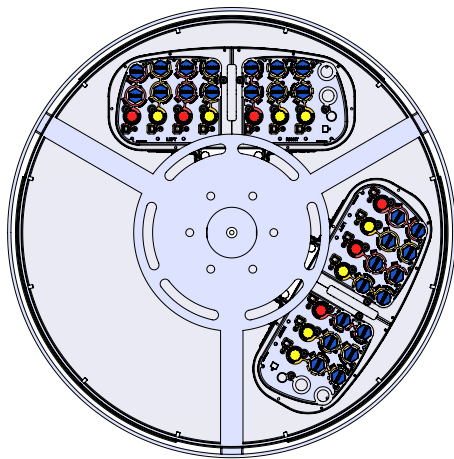

| ARRAY LAYOUT | ARRAY | FREQUENCY | CONNECTOR | CONNECTOR TYPE |
|--------------|-------|-----------|-----------|----------------|
| | R1 | 698-803 | 1-2 | 4.3-10 Female |
| | R2 | 880-960 | 3-4 | 4.3-10 Female |
| | R3 | 698-960 | 5-6 | 4.3-10 Female |
| | Y1 | 1427-2690 | 7-8 | 4.3-10 Female |
| | Y2 | 1427-2690 | 9-10 | 4.3-10 Female |
| | Y3 | 1427-2690 | 11-12 | 4.3-10 Female |
| | Y4 | 1427-2690 | 13-14 | 4.3-10 Female |

Diagram shown at right depicts the view from the front of the antenna.
The illustration is not shown to scale.

MECHANICAL SPECIFICATIONS

| | | | |
|--|--|-----------------------------------|--|
| Length | | mm (in) | 3053 (120.1) |
| Diameter | | mm (in) | 750 (29.5) |
| Net Weight | Two Sectors | kg (lbs) | 190 (418.8) |
| | One Sector | kg (lbs) | 140 (308.6) |
| Windload (EN 1991-1-4:2005 using Wind Tunnel Coefficients) | Calculation | km/h (mph) | 150 (93.2) |
| | Frontal | N (lbf) | 2110 (474.3) |
| Operational Wind Speed | | km/h (mph) | 160 (99.4) |
| Survival Wind Speed | | km/h (mph) | 200 (124) |
| Radome Color | | --- | Light Grey |
| Radome Material | | --- | Stretched Membrane |
| Lightning Protection | | --- | Direct Ground |
| Shipping | Shipping Dimensions (Length x Width x Depth) | mm (in) | 3350 x 900 x 950 (131.8 x 35.4 x 37.4) |
| | Shipping Weight | kg (lbs) | 350 (771.6) |
| | Shipping Volume | m ³ (ft ³) | 2.8 (98.8) |

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

5980470P-2

5980470PG-2 5980470PDx-2

7-Band, 28-Port, 65°, XPOL, Two-Sector Antenna, Variable Tilt, 3053 mm

ENVIRONMENTAL SPECIFICATIONS

| | | |
|----------------------------------|-----------|------------------------------|
| Environmental | --- | ETS 300 019 |
| Operating Temperature | ° C (° F) | -40° to +60° (-40° to +140°) |
| Product Environmental Compliance | --- | Product is RoHs Compliant |

INSTALLATION Please read all installation notes before installing this product.



Always attach the antenna by all mounting points.

Do not install the antenna with the connectors facing upwards.

Crochet de manutention
Handling hook

