






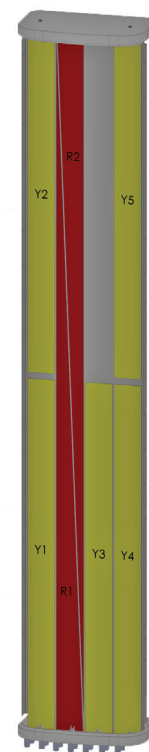
6798470N

6798470NG 6798470NDx

7-Band, 14-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2115 mm

- Hepta band antenna, dual polarisation, 14 connectors
- Independent tilt on each band 2-12° / 2-12° / 2-12° / 2-12° / 2-12° / 2-12° / 2-12°
- MET and RET versions, 3GPP/AISG2.0, in multiple single RET (multiple device type1) or in Multi-RET (device type 17, with firmware above MD3.10).
- Our patented, RET module controlling all tilt angles, fully inserted inside the antenna (field replaceable)

PRODUCT OVERVIEW	Frequency Range (MHz)	698-862	880-960	2300-2690	1427-2690	2300-2690	1427-2690	1427-2690
	Array	 R1	 R2	 Y1	 Y2	 Y3	 Y4	 Y5
	Connector	1-2	3-4	5-6	7-8	9-10	11-12	13-14
	Polarization	XPOL	XPOL	XPOL	XPOL	XPOL	XPOL	XPOL
	Azimuth Beamwidth (avg)	65°	65°	65°	65°	65°	65°	65°
	Electrical Downtilt	2-12°	2-12°	2-12°	2-12°	2-12°	2-12°	2-12°
	Dimensions	2115 x 370 x 217 mm						



ORDERING OPTIONS Select from the different options listed below

SELECT ELECTRICAL DOWNTILT CONTROL & AISG PROTOCOL	SELECT ACTUATOR	SELECT CONNECTOR TYPE	ANTENNA MODEL NUMBER
Manual Electrical Tilt (MET)	---	4.3-10 Female	6798470N
Remote Electrical Tilt (RET) AISG v2.0 / 3GPP	Multi-Device Control Unit (MDCU)	4.3-10 Female	6798470NG
	Multi-Device Dual Unit (MDDU)	4.3-10 Female	6798470NDx*

*Pre-commissioned configuration; Contact Amphenol for further details.

6798470N

6798470NG 6798470NDx

7-Band, 14-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2115 mm

ELECTRICAL SPECIFICATIONS Ultra Low Band

R1

Frequency Range		MHz	698-862	
		MHz	698-806	790-862
Polarization		---	±45°	
Gain	Over all Tilts	dBi	14.1 ± 0.5	14.4 ± 0.4
Azimuth Beamwidth		degrees	72.2° ± 4.6°	67.6° ± 4.2°
Elevation Beamwidth		degrees	12.2° ± 0.9°	10.9° ± 0.7°
Electrical Downtilt		degrees	2°-12°	
Impedance		Ohms	50	
VSWR		---	< 1.5	
Passive Intermodulation 3rd Order for 2 x 20W Carriers		dBm	< -110	
Front-to-Back Ratio, Total Power, ±30°		dB	> 22.1	> 22.2
Upper Sidelobe Suppression, Peak to 20°		dB	> 15.1	> 16.2
Cross Polar Ratio	Main Direction (0°)	dB	> 18.5	> 20.7
	Sector Edges (±60°)	dB	> 9.4	> 9.0
Maximum Effective Power Per Port		Watts	250 W	
Inter/Intra Band Isolation		dB	> 25	

Standard values based on NGMN-P-BASTA version 10.0 recommendation.

ELECTRICAL SPECIFICATIONS Filtered Array (R1)

R2

Frequency Range		MHz	880-960	
Polarization		---	±45°	
Gain	Over all Tilts	dBi	14.7 ± 0.6	
Azimuth Beamwidth		degrees	65.1° ± 3.7°	
Elevation Beamwidth		degrees	10.0° ± 0.5°	
Electrical Downtilt		degrees	2°-12°	
Impedance		Ohms	50	
VSWR		---	< 1.5	
Passive Intermodulation 3rd Order for 2 x 20W Carriers		dBm	< -110	
Front-to-Back Ratio, Total Power, ±30°		dB	> 19.8	
Upper Sidelobe Suppression, Peak to 20°		dB	> 15.7	
Cross Polar Ratio	Main Direction (0°)	dB	> 20.7	
	Sector Edges (±60°)	dB	> 7.8	
Maximum Effective Power Per Port		Watts	250 W	
Inter/Intra Band Isolation		dB	> 25	

Standard values based on NGMN-P-BASTA version 10.0 recommendation.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6798470N

6798470NG 6798470NDx

7-Band, 14-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2115 mm

ELECTRICAL SPECIFICATIONS MEGA Wide Band

Y1

Frequency Range		MHz	2300-2690	
		MHz	2300-2500	2490-2690
Polarization		---	±45°	
Gain	Over all Tilts	dBi	15.9 ± 0.4	16.4 ± 0.5
Azimuth Beamwidth		degrees	62.0° ± 6.0°	66.3° ± 6.0°
Elevation Beamwidth		degrees	6.9° ± 0.7°	6.4° ± 0.5°
Electrical Downtilt		degrees	2°-12°	
Impedance		Ohms	50	
VSWR		---	< 1.5	
Passive Intermodulation 3rd Order for 2 x 20W Carriers		dBm	< -110	
Front-to-Back Ratio, Total Power, ±30°		dB	> 22.8	> 21.6
Upper Sidelobe Suppression, Peak to 20°		dB	> 12.6	> 11.9
Cross Polar Ratio	Main Direction (0°)	dB	> 11.3	> 14.6
	Sector Edges (±60°)	dB	> 6.7	> 6.1
Maximum Effective Power Per Port		Watts	200 W	
Inter/Intra Band Isolation		dB	> 25	

Standard values based on NGMN-P-BASTA version 10.0 recommendation.

ELECTRICAL SPECIFICATIONS MEGA Wide Band

Y2

Frequency Range		MHz	1427-2690				
		MHz	1427-1518	1695-1990	1920-2180	2300-2500	2490-2690
Polarization		---	±45°				
Gain	Over all Tilts	dBi	15.1 ± 0.2	15.5 ± 0.3	16.2 ± 0.4	15.9 ± 0.4	17.0 ± 0.5
Azimuth Beamwidth		degrees	68.9° ± 3.8°	62.2° ± 5.3°	65.6° ± 4.8°	66.8° ± 5.5°	55.7° ± 7.3°
Elevation Beamwidth		degrees	11.7° ± 0.4°	9.9° ± 0.7°	9.2° ± 0.5°	7.5° ± 0.3°	6.9° ± 0.4°
Electrical Downtilt		degrees	2°-12°				
Impedance		Ohms	50				
VSWR		---	< 1.5				
Passive Intermodulation		dBm	< -110				
Front-to-Back Ratio, Total Power, ±30°		dB	> 24.5	> 25.5	> 24.5	> 23.6	> 24.5
Upper Sidelobe Suppression, Peak to 20°		dB	> 16.9	> 21.2	> 20.7	> 19.2	> 15.6
Cross Polar Ratio	Main Direction (0°)	dB	> 19.1	> 19.5	> 19.7	> 16.9	> 19.5
	Sector Edges (±60°)	dB	> 10.6	> 11.5	> 7.1	> 7.2	> 6.7
Maximum Effective Power Per Port		Watts	200 W				
Inter/Intra Band Isolation		dB	> 25				

Standard values based on NGMN-P-BASTA version 10.0 recommendation.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6798470N

6798470NG 6798470NDx

7-Band, 14-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2115 mm

ELECTRICAL SPECIFICATIONS MEGA Wide Band

Y3

Frequency Range		MHz	2300-2690	
		MHz	2300-2500	2490-2690
Polarization		---	±45°	
Gain	Over all Tilts	dBi	15.9 ± 0.4	16.4 ± 0.5
Azimuth Beamwidth		degrees	65.9° ± 6.0°	65.1° ± 6.0°
Elevation Beamwidth		degrees	7.0° ± 0.5°	6.4° ± 0.5°
Electrical Downtilt		degrees	2°-12°	
Impedance		Ohms	50	
VSWR		---	< 1.5	
Passive Intermodulation 3rd Order for 2 x 20W Carriers		dBm	< -110	
Front-to-Back Ratio, Total Power, ±30°		dB	> 26.6	> 26.0
Upper Sidelobe Suppression, Peak to 20°		dB	> 13.5	> 12.6
Cross Polar Ratio	Main Direction (0°)	dB	> 15.2	> 13.6
	Sector Edges (±60°)	dB	> 5.8	> 5.3
Maximum Effective Power Per Port		Watts	200 W	
Inter/Intra Band Isolation		dB	> 25	

Standard values based on NGMN-P-BASTA version 10.0 recommendation.

ELECTRICAL SPECIFICATIONS MEGA Wide Band

Y4

Frequency Range		MHz	1427-2690				
		MHz	1427-1518	1695-1990	1920-2180	2300-2500	2490-2690
Polarization		---	±45°				
Gain	Over all Tilts	dBi	15.5 ± 0.4	16.2 ± 0.4	16.9 ± 0.5	17.1 ± 0.4	17.3 ± 0.5
Azimuth Beamwidth		degrees	74.8° ± 5.1°	68.0° ± 5.4°	64.2° ± 3.9°	60.9° ± 5.7°	55.8° ± 7.8°
Elevation Beamwidth		degrees	11.7° ± 0.7°	10.0° ± 0.7°	9.2° ± 0.7°	7.5° ± 0.3°	6.9° ± 0.5°
Electrical Downtilt		degrees	2°-12°				
Impedance		Ohms	50				
VSWR		---	< 1.5				
Passive Intermodulation		dBm	< -110				
Front-to-Back Ratio, Total Power, ±30°		dB	> 27.2	> 27.6	> 26.8	> 26.7	> 25.7
Upper Sidelobe Suppression, Peak to 20°		dB	> 17.8	> 18.4	> 19.1	> 18.4	> 15.7
Cross Polar Ratio	Main Direction (0°)	dB	> 17.8	> 20.1	> 19.8	> 15.5	> 15.1
	Sector Edges (±60°)	dB	> 11.7	> 8.6	> 7.6	> 6.5	> 6.0
Maximum Effective Power Per Port		Watts	200 W				
Inter/Intra Band Isolation		dB	> 25				

Standard values based on NGMN-P-BASTA version 10.0 recommendation.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6798470N

6798470NG 6798470NDx

7-Band, 14-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2115 mm

ELECTRICAL SPECIFICATIONS MEGA Wide Band

Y5

Frequency Range		MHz	1427-2690				
		MHz	1427-1518	1695-1990	1920-2180	2300-2500	2490-2690
Polarization		---	±45°				
Gain	Over all Tilts	dBi	15.1 ± 0.2	15.4 ± 0.4	16.1 ± 0.5	15.8 ± 0.4	16.9 ± 0.6
Azimuth Beamwidth		degrees	71.2° ± 3.6°	57.9° ± 4.5°	61.7° ± 7.3°	66.5° ± 3.1°	56.3° ± 11.4°
Elevation Beamwidth		degrees	12.1° ± 0.7	10.1° ± 0.6°	9.4° ± 0.6°	7.6° ± 0.3°	7.0° ± 0.4°
Electrical Downtilt		degrees	2°-12°				
Impedance		Ohms	50				
VSWR		---	< 1.5				
Passive Intermodulation		dBm	< -110				
Front-to-Back Ratio, Total Power, ±30°		dB	> 25.6	> 26.4	> 25.3	> 27.6	> 25.1
Upper Sidelobe Suppression, Peak to 20°		dB	> 15.9	> 20.5	> 20.4	> 19.2	> 15.3
Cross Polar Ratio	Main Direction (0°)	dB	> 17.9	> 21.0	> 21.5	> 16.4	> 18.5
	Sector Edges (±60°)	dB	> 12.3	> 8.9	> 7.7	> 7.2	> 6.8
Maximum Effective Power Per Port		Watts	200 W				
Inter/Intra Band Isolation		dB	> 25				

Standard values based on NGMN-P-BASTA version 10.0 recommendation.

6798470N

6798470NG 6798470NDx

7-Band, 14-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2115 mm

ELECTRICAL DOWNTILT CONTROL

For multiband antennas, electrical downtilt for each band can be controlled separately.

Manual Electrical Tilt (MET) Control	A colored knob at the end of the tilt indicator allows change of the tilt without need of a tool. The knob color is identical to the corresponding connector color.
Remote Electrical Tilt (RET) Control	The remote control of the electrical tilt is managed by a Multi-Device Control Unit (MDCU) or a Multi-Device Dual Unit (MDDU) inserted in the bottom of the antenna. <i>See details below and refer to the ordering options to see which actuators are available with this particular antenna.</i> A single actuator individually controls the tilt of each band (no need for daisy chain cables between the bands). This module does not add any additional length to the antenna. The tilt angle indicators always remain visible and the antenna still has manual tilt control (manual override).

RET ACTUATOR

Amphenol's **RET-READY** antennas are delivered with the RET Actuator already installed and pre-commissioned with all antenna parameters. Every RET device is factory configured and calibrated so the antenna is ready to be used once delivered to the site which means that there is no need for further installation of RET devices or for programming their configuration or for running a calibration process.


RET-READY ACTUATORS	Multi-Device Control Unit (MDCU). The MDCU is an electronic module that allows the remote control of the electrical downtilt (RET) in Amphenol antennas with factory embedded motors. The MDCU is factory installed. <i>Refer to the ORDERING OPTIONS for availability with this model</i>
	Multi-Device Dual Unit (MDDU). The MDDU allows two separate RET Controllers to independently drive the RETs in antennas with factory embedded motors (for antenna sharing or two technologies). The MDDU is factory installed. <i>Refer to the ORDERING OPTIONS for availability with this model.</i>

Number of RET-READY Actuators		One per antenna
Input Voltage		+10 to +30 V
Power Consumption	Idle State	0.5 W
	Operating	4 W typical / 10 W maximum
Protocol		3GPP/AISG 2.0
Tilt Change Duration		Less than 15 seconds, typical (may vary dependent on antenna type and outdoor temperature)
Precision		±0.5°
Tilt Change Capability		50,000 minimum
RET Interface		1 pair of AISG Male and Female (type IEC60130-9)
Field Replaceable Unit		Yes

6798470N


6798470NG 6798470NDx

7-Band, 14-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2115 mm

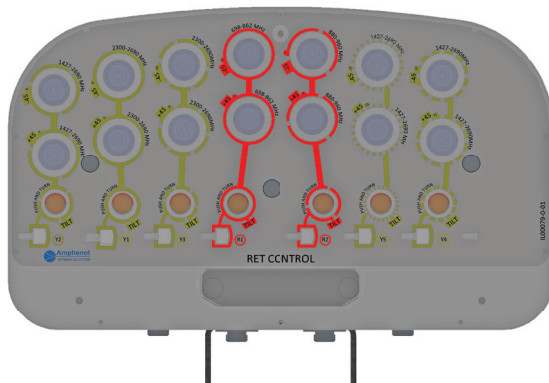

ARRAY LAYOUT	ARRAY	FREQUENCY	CONNECTOR	CONNECTOR TYPE
	R1	698-862	1-2	4.3-10 Female Long Neck
	R2	880-960	3-4	4.3-10 Female Long Neck
	Y1	2300-2690	5-6	4.3-10 Female Long Neck
	Y2	1427-2690	7-8	4.3-10 Female Long Neck
	Y3	2300-2690	9-10	4.3-10 Female Long Neck
	Y4	1427-2690	11-12	4.3-10 Female Long Neck
	Y5	1427-2690	13-14	4.3-10 Female Long Neck

Diagram shown at right depicts the view from the front of the antenna.
The illustration is not shown to scale.

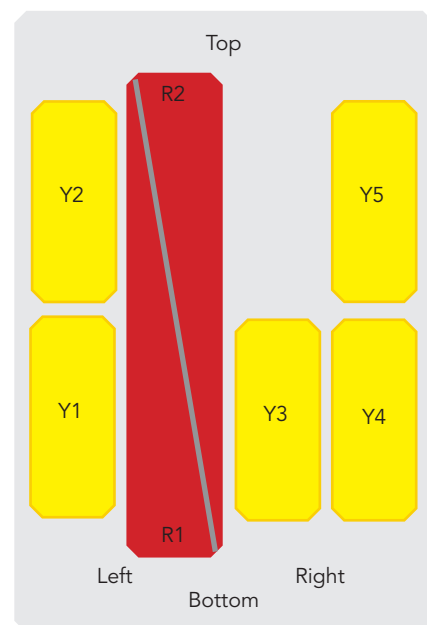

MECHANICAL SPECIFICATIONS

Length		mm (in)	2115 (83.2)
Width		mm (in)	370 (14.6)
Depth		mm (in)	217 (8.5)
Net Weight - Antenna Only		kg (lbs)	43 (94.7)
Windload (EN 1991-1-4:2005 using Wind Tunnel Coefficients)	Calculation	km/h (mph)	150 (93.2)
	Frontal	N (lbf)	1150 (258.5)
	Lateral	N (lbf)	450 (89.9)
	Rearside	N (lbf)	1050 (236.0)
Operational Wind Speed		km/h (mph)	160 (99.4)
Survival Wind Speed		km/h (mph)	200 (124)
Radome Color		---	Gray RAL7035
Radome Material		---	Outdoor Fibreglass
Lightning Protection		---	Direct Ground
Shipping	Shipping Dimensions (Length x Width x Depth)	mm (in)	2290 x 550 x 375 (87.5 x 21.6 x 14.7)
	Shipping Weight	kg (lbs)	56 (123.4)
	Shipping Volume	m ³ (ft ³)	0.472 (16.6)

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6798470N

6798470NG 6798470NDx

7-Band, 14-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2115 mm

ENVIRONMENTAL SPECIFICATIONS

Environmental Standard	---	ETS 300 019
Operating Temperature	° C (° F)	-40° to +60° (-40° to 140°)
Product Environmental Compliance	---	Product is RoHs Compliant

ACCESSORIES

All accessories are ordered separately unless otherwise indicated

ITEM	MODEL NUMBER	WEIGHT
Brackets for pole Ø48 to Ø115 mm (Ø1.9 to Ø4.5 in) delivered as standard	IA00181	3.4 kg (7.5 lbs)
Kit to add mechanical tilt (0° to 10°) to above brackets delivered as standard	0900397/00	3.0 kg (6.6 lbs)


INSTALLATION

Please read all installation notes before installing this product.



Always attach the antenna by all mounting points.

Do not install the antenna with the connectors facing upwards.

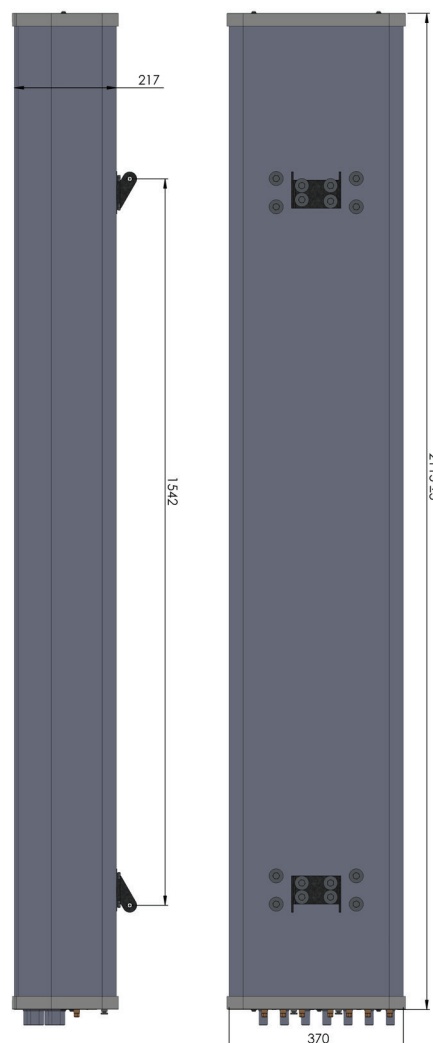

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.