


6800400

6800400N 6800400G 6800400NG

5-Band, 10-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2690 mm

- Penta band antenna, dual polarisation, 10 connectors
- Independent tilt on each band 0-10° / 0-12° / 0-12° / 0-12° / 0-12°
- MET and RET versions, 3GPP/AISG2.0, in multiple single RET (multiple device type1) or in Multi-RET (device type 17, with firmware above MD3.10).
- Our patented RET module to controlling all tilt angles (field replaceable)

PRODUCT OVERVIEW	Frequency Range (MHz)	698-960	1695-2690	1695-2690	1695-2690	1695-2690
	Array	■ R1	■ Y1	■ Y2	■ Y3	■ Y4
	Connector	1-2	3-4	5-6	7-8	9-10
	Polarization	XPOL	XPOL	XPOL	XPOL	XPOL
	Azimuth Beamwidth (avg)	65°	65°	65°	65°	65°
	Electrical Downtilt	0-10°	0-12°	0-12°	0-12°	0-12°
	Dimensions	2690 x 392 x 114 mm				

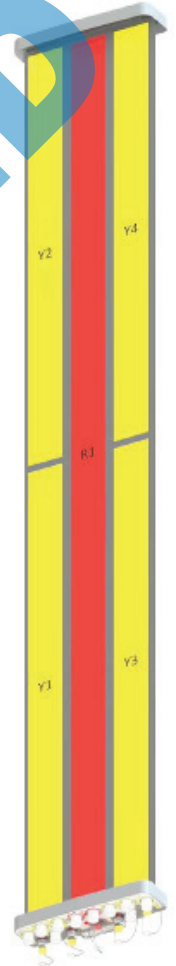

ORDERING OPTIONS Select from the different options listed below

SELECT ELECTRICAL DOWNTILT CONTROL & AISG PROTOCOL	SELECT ACTUATOR	SELECT CONNECTOR TYPE	ANTENNA MODEL NUMBER
Manual Electrical Tilt (MET)	---	4.3-10 Female	6800400N
		7/16-DIN Female	6800400
Remote Electrical Tilt (RET) AISG v2.0 / 3GPP	Multi-Device Control Unit (MDCU)	4.3-10 Female	6800400NG
		7/16-DIN Female	6800400G
	Multi-Device Dual Unit (MDDU)	4.3-10 Female	6800400NDx*
		7/16-DIN Female	6800400Dx*

*Pre-commissioned configuration; Contact Amphenol for further details.



Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6800400

6800400N 6800400G 6800400NG

5-Band, 10-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2690 mm

ELECTRICAL SPECIFICATIONS Ultra Low Band

■ R1

Frequency Range		MHz	698-960		
		MHz	698-790	790-890	890-960
Polarization		---	±45°		
Gain	Over all Tilts	dBi	16.5 ± 0.6	17.0 ± 0.4	17.5 ± 0.4
Azimuth Beamwidth		degrees	68° ± 2°	68° ± 2°	71° ± 2°
Elevation Beamwidth		degrees	8.7° ± 0.8°	7.7° ± 0.5°	7.0° ± 0.5°
Electrical Downtilt		degrees	0°-10°		
Impedance		Ohms	50		
VSWR		---	< 1.5		
Passive Intermodulation 3rd Order for 2 x 20W Carriers		dBc	< -153		
Front-to-Back Ratio, Total Power, ±30°		dB	> 25	> 25	> 25
Upper Sidelobe Suppression, Peak to 20°		dB	> 15	> 15	> 15
Cross Polar Ratio @ Main Direction (0°)		dB	> 19.3	> 21.8	> 21.2
Maximum Effective Power Per Port		Watts	400 W		
Inter/Intra Band Isolation		dB	> 30 / > 27		

Standard values based on NGMN-P-BASTA version 9.6 recommendation.

ELECTRICAL SPECIFICATIONS Ultra Wide Band

■ Y1

Frequency Range		MHz	1695-2690			
		MHz	1695-1880	1920-2170	2200-2490	2490-2690
Polarization		---	±45°			
Gain	Over all Tilts	dBi	17.0 ± 0.4	17.5 ± 0.4	18.0 ± 0.4	18.0 ± 0.4
Azimuth Beamwidth		degrees	69° ± 5°	67° ± 5°	65° ± 4°	63° ± 4°
Elevation Beamwidth		degrees	7.2° ± 0.4°	6.1° ± 0.6°	5.2° ± 0.2°	5.0° ± 0.3°
Electrical Downtilt		degrees	0°-12°			
Impedance		Ohms	50			
VSWR		---	< 1.5			
Passive Intermodulation 3rd Order for 2 x 20W Carriers		dBc	< -153			
Front-to-Back Ratio, Total Power, ±30°		dB	> 25	> 25	> 25	> 25
Upper Sidelobe Suppression, Peak to 20°		dB	> 16	> 16	> 16	> 16
Cross Polar Ratio @ Main Direction (0°)		dB	> 21.4	> 24.0	> 23.2	> 20.5
Maximum Effective Power Per Port		Watts	300 W			
Inter/Intra Band Isolation		dB	> 30 / > 27			

Standard values based on NGMN-P-BASTA version 9.6 recommendation.

6800400

6800400N 6800400G 6800400NG

5-Band, 10-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2690 mm

ELECTRICAL SPECIFICATIONS Ultra Wide Band

■ Y2

Frequency Range		MHz	1695-2690			
		MHz	1695-1880	1920-2170	2200-2490	2490-2690
Polarization		---	±45°			
Gain	Over all Tilts	dBi	17.0 ± 0.4	17.5 ± 0.4	18.0 ± 0.4	18.0 ± 0.4
Azimuth Beamwidth		degrees	69° ± 5°	67° ± 5°	65° ± 4°	63° ± 4°
Elevation Beamwidth		degrees	7.2° ± 0.4°	6.1° ± 0.6°	5.2° ± 0.2°	5.0° ± 0.3°
Electrical Downtilt		degrees	0°-12°			
Impedance		Ohms	50			
VSWR		---	< 1.5			
Passive Intermodulation 3rd Order for 2 x 20W Carriers		dBc	< -153			
Front-to-Back Ratio, Total Power, ±30°		dB	> 25	> 25	> 25	> 25
Upper Sidelobe Suppression, Peak to 20°		dB	> 16	> 16	> 16	> 16
Cross Polar Ratio @ Main Direction (0°)		dB	> 21.4	> 24.0	> 23.2	> 20.5
Maximum Effective Power Per Port		Watts	300 W			
Inter/Intra Band Isolation		dB	> 30 / > 27			

Standard values based on NGMN-P-BASTA version 9.6 recommendation.

ELECTRICAL SPECIFICATIONS Ultra Wide Band

■ Y3

Frequency Range		MHz	1695-2690			
		MHz	1695-1880	1920-2170	2200-2490	2490-2690
Polarization		---	±45°			
Gain	Over all Tilts	dBi	17.0 ± 0.4	17.5 ± 0.4	18.0 ± 0.4	18.0 ± 0.4
Azimuth Beamwidth		degrees	69° ± 5°	67° ± 5°	65° ± 4°	63° ± 4°
Elevation Beamwidth		degrees	7.2° ± 0.4°	6.1° ± 0.6°	5.2° ± 0.2°	5.0° ± 0.3°
Electrical Downtilt		degrees	0°-12°			
Impedance		Ohms	50			
VSWR		---	< 1.5			
Passive Intermodulation 3rd Order for 2 x 20W Carriers		dBc	< -153			
Front-to-Back Ratio, Total Power, ±30°		dB	> 25	> 25	> 25	> 25
Upper Sidelobe Suppression, Peak to 20°		dB	> 16	> 16	> 16	> 16
Cross Polar Ratio @ Main Direction (0°)		dB	> 21.4	> 24.0	> 23.2	> 20.5
Maximum Effective Power Per Port		Watts	300 W			
Inter/Intra Band Isolation		dB	> 30 / > 27			

Standard values based on NGMN-P-BASTA version 9.6 recommendation.

6800400

6800400N 6800400G 6800400NG

5-Band, 10-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2690 mm

ELECTRICAL SPECIFICATIONS Ultra Wide Band

■ Y4

Frequency Range		MHz	1695-2690			
		MHz	1695-1880	1920-2170	2200-2490	2490-2690
Polarization		---	±45°			
Gain	Over all Tilts	dBi	17.0 ± 0.4	17.5 ± 0.4	18.0 ± 0.4	18.0 ± 0.4
Azimuth Beamwidth		degrees	69° ± 5°	67° ± 5°	65° ± 4°	63° ± 4°
Elevation Beamwidth		degrees	7.2° ± 0.4°	6.1° ± 0.6°	5.2° ± 0.2°	5.0° ± 0.3°
Electrical Downtilt		degrees	0°-12°			
Impedance		Ohms	50			
VSWR		---	< 1.5			
Passive Intermodulation 3rd Order for 2 x 20W Carriers		dBc	< -153			
Front-to-Back Ratio, Total Power, ±30°		dB	> 25	> 25	> 25	> 25
Upper Sidelobe Suppression, Peak to 20°		dB	> 16	> 16	> 16	> 16
Cross Polar Ratio @ Main Direction (0°)		dB	> 21.4	> 24.0	> 23.2	> 20.5
Maximum Effective Power Per Port		Watts	300 W			
Inter/Intra Band Isolation		dB	> 30 / > 27			

Standard values based on NGMN-P-BASTA version 9.6 recommendation.

6800400

6800400N 6800400G 6800400NG

5-Band, 10-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2690 mm

ELECTRICAL DOWNTILT CONTROL

For multiband antennas, electrical downtilt for each band can be controlled separately. Tilt indicator(s) are covered by removable transparent cap(s).

Manual Electrical Tilt (MET) Control	A colored knob at the end of the tilt indicator allows change of the tilt without need of a tool. The knob color is identical to the corresponding connector color. To access the knob, remove the cap by turning it counter-clockwise. It is re-installed by opposite rotation. Do not remove the transparent cap(s) from the antenna.
Remote Electrical Tilt (RET) Control	The remote control of the electrical tilt is managed by a Multi-Device Control Unit (MDCU) or a Multi-Device Dual Unit (MDDU) inserted in the bottom of the antenna. <i>See details below and refer to the ordering options to see which actuators are available with this particular antenna.</i> A single actuator individually controls the tilt of each band (no need for daisy chain cables between the bands). This module does not add any additional length to the antenna. For RET control, the transparent caps must be in place and locked. The tilt angle indicators always remain visible and the antenna still has manual tilt control (manual override). Do not remove the transparent cap(s) from the antenna.

RET ACTUATOR

Amphenol's **RET-READY** antennas are delivered with the RET Actuator already installed and pre-commissioned with all antenna parameters. Every RET device is factory configured and calibrated so the antenna is ready to be used once delivered to the site which means that there is no need for further installation of RET devices or for programming their configuration or for running a calibration process.



RET-READY ACTUATORS	<p>Multi-Device Control Unit (MDCU). The MDCU is an electronic module that allows the remote control of the electrical downtilt (RET) in Amphenol antennas with factory embedded motors. The MDCU is factory installed. <i>Refer to the ORDERING OPTIONS for availability with this model</i></p> <p>Multi-Device Dual Unit (MDDU). The MDDU allows two separate RET Controllers to independently drive the RETs in antennas with factory embedded motors (for antenna sharing or two technologies). The MDDU is factory installed. <i>Refer to the ORDERING OPTIONS for availability with this model.</i></p>	
Number of RET-READY Actuators	One per antenna	
Input Voltage	+10 to +30 V	
Power Consumption	Idle State	0.5 W
	Operating	4 W typical / 10 W maximum
Protocol	3GPP/AISG 2.0	
Tilt Change Duration	Less than 15 seconds, typical (may vary dependent on antenna type and outdoor temperature)	
Precision	±0.5°	
Tilt Change Capability	50,000 minimum	
RET Interface	1 pair of AISG Male and Female (type IEC60130-9)	
Field Replaceable Unit	Yes	

Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6800400

6800400N 6800400G 6800400NG

5-Band, 10-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2690 mm

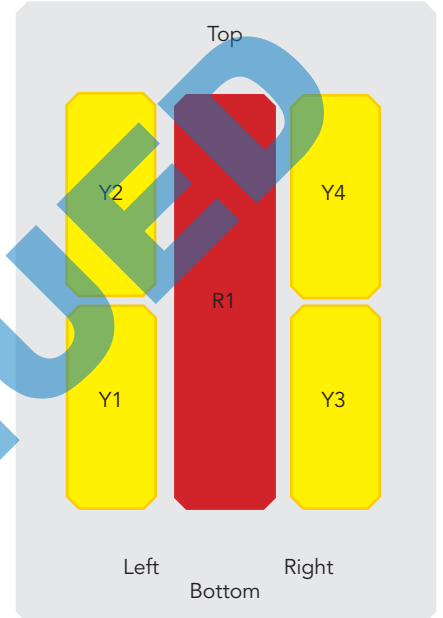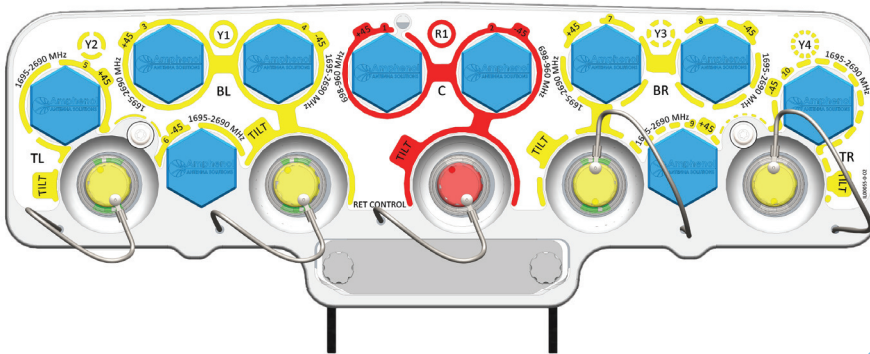

ARRAY LAYOUT	ARRAY	FREQUENCY	CONNECTOR	CONNECTOR TYPE
	R1	698-960	1-2	7/16-DIN Female Long Neck or 4.3-10 Female
	Y1	1695-2690	3-4	7/16-DIN Female Long Neck or 4.3-10 Female
	Y2	1695-2690	5-6	7/16-DIN Female Long Neck or 4.3-10 Female
	Y3	1695-2690	7-8	7/16-DIN Female Long Neck or 4.3-10 Female
	Y4	1695-2690	9-10	7/16-DIN Female Long Neck or 4.3-10 Female

Diagram shown at right depicts the view from the front of the antenna. The illustration is not shown to scale.

MECHANICAL SPECIFICATIONS

Length		mm (in)	2690 (105.9)
Width		mm (in)	392 (15.4)
Depth		mm (in)	114 (4.4)
Net Weight - Antenna Only		kg (lbs)	33 (81.5)
Mechanical Distance Between Mounting Points		mm (in)	Refer to Diagram
Windload (EN 1991-1-4:2005 using Wind Tunnel Coefficients)	Calculation	km/h (mph)	150 (93.2)
	Frontal	N (lbf)	1464 (329.1)
	Lateral	N (lbf)	637 (143.2)
	Rearside	N (lbf)	1592 (357.8)
Operational Wind Speed		km/h (mph)	160 (99.4)
Survival Wind Speed		km/h (mph)	200 (124)
Radome Color		---	Gray RAL7035
Radome Material		---	Outdoor plastic
Lightning Protection		---	Direct Ground

Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6800400

6800400N 6800400G 6800400NG

5-Band, 10-Port, 65°, XPOL, Panel Antenna, Variable Tilt, 2690 mm

ENVIRONMENTAL SPECIFICATIONS

Environmental	---	ETS 300 019
Operating Temperature	° C (° F)	-40° to +60° (-40° to +140°)
Product Environmental Compliance	---	Product is RoHs Compliant

ACCESSORIES All accessories are ordered separately unless otherwise indicated


ITEM	MODEL NUMBER	WEIGHT
Brackets for pole Ø48 to Ø115 mm (Ø1.9 to Ø4.5 in) delivered as standard	0900393/00	5.1 kg (11.2 lbs)
Kit to add mechanical tilt (0° to 10°) to above brackets optional	0900394/00	3.1 kg (6.8 lbs)

Wall mounting brackets are available upon request

INSTALLATION Please read all installation notes before installing this product.



- Always attach the antenna by all mounting points.
- Do not install the antenna with the connectors facing upwards.
- Do not cut the tethered transparent caps(s) that cover the antenna's tilt adjustment indicators.
- In order to operate the RET control, the transparent caps covering the tilt adjustment indicators must be engaged and locked.

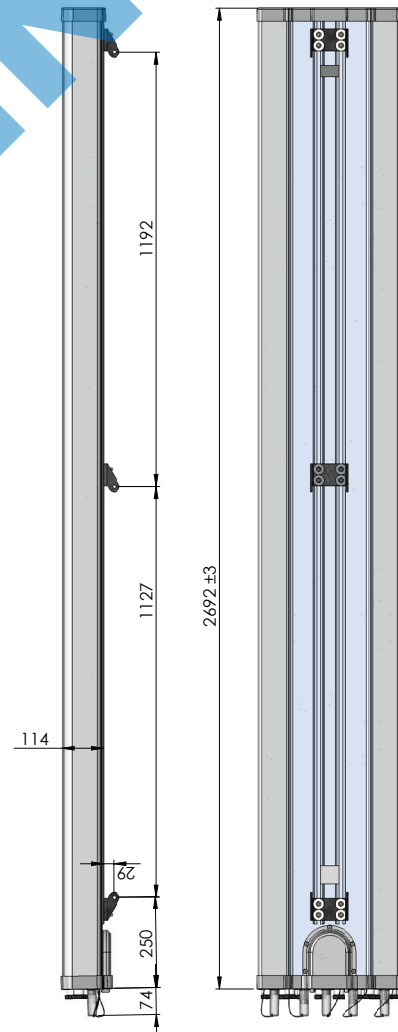

Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.