

APXVB4LTY14AB_43MQ-C-I20

Features

- Hybrid FDD + TDD beamforming within a radome
- 2 ports / 1 cross pol system in low band (698-960 MHz)
- 8 ports / 4 cross pol systems in high band (1710-2690 MHz)
- TDD 8 ports + 1 calibration port in 3.5GHz (3300-3800 MHz)
- Integrated and field replaceable SRET
- Compliant with AISG v2.0 and 3GPP



PRODUCT OVERVIEW		FDD					TDD			
	Frequency Range (MHz)	(1x) 698-960	(4x) 1710-2690				(8T8R) 3300-3800			
	Array	<div><div></div> R1</div>	<div><div></div> Y1</div>	<div><div></div> Y2</div>	<div><div></div> Y3</div>	<div><div></div> Y4</div>	<div><div></div> P1</div>			
	Connector	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18
		2 PORTS	8 PORTS				2 CLUSTER CONNECTORS - 8 PORTS			
		4.3-10 Female	4.3-10 Female				MQ4/MQ5			
	Polarization	XPOL	XPOL				XPOL			
	Azimuth Beamwidth (avg)	65°	65°				90° Unit Beam			
	Electrical Downtilt	2-14°	2-12°				2-12°			
	Dimensions	1405 x 429 x 199 mm (55.3 x 16.9 x 7.8 in)								

ORDERING OPTIONS Select from the following ordering options

ANTENNA MODEL NUMBER	CONFIGURATION	MOUNTING HARDWARE	MOUNTING PIPE DIAMETER	SHIPPING WEIGHT
APXVB4LTY14AB_43MQ-C-I20	ACU-I20-B6 Internal RET Included	APM50-B1 Beam Tilt Kit Included	50-110 mm (2.0-4.3 in)	37.2 kg (82 lbs)
APXVB4LTY14AB_43MQ-C-I20S (Material Code: 50016718)	ACU-X20-B6 Internal RET Included Dynamic Site Sharing Mode	APM50-B1 Beam Tilt Kit Included	50-110 mm (2.0-4.3 in)	37.2 kg (82 lbs)
APXVB4LTY14AB_43MQ-C-I20S (Material Code: 50016719)	ACU-X20-B6 Internal RET Included Static Site Sharing Mode	APM50-B1 Beam Tilt Kit Included	50-110 mm (2.0-4.3 in)	37.2 kg (82 lbs)

APXVB4LTY14AB_43MQ-C-I20

ELECTRICAL SPECIFICATIONS

R1

Frequency Range		MHz	698-960		
		MHz	698-806	790-894	880-960
Polarization		---	±45°		
Gain	Over all Tilts	dBi	14.5 ± 0.3	14.6 ± 0.3	14.7 ± 0.4
	Max Gain	dBi	14.8	14.9	15.1
Azimuth Beamwidth (3 dB)		degrees	65.8° ± 3.8°	65° ± 5.3°	59.5° ± 3.5°
Elevation Beamwidth (3 dB)		degrees	17.1° ± 1.5°	15° ± 1.1°	13.7° ± 0.5°
Electrical Downtilt		degrees	2-14°		
Impedance		Ohms	50Ω		
VSWR (Return Loss)		---	1.5:1 (-14 dB)		
Passive Intermodulation		dBc	-150 (3rd Order for 2x20 W Carriers)		
Front-to-Back Ratio, Total Power, ± 30°		dB	21.8	23.6	22.1
First Upper Side Lobe Suppression		dB	11.6	11.7	11.6
Cross-Pol Over Sector		dB	9.3	9.9	9.8
Cross Polar Discrimination (XPD) at Mechanical Boresight (0°)		dB	24.5	24	20.4
Maximum Effective Power Per Port		Watts	350 W		
Cross Polar Isolation		dB	25	25	25
Interband Isolation		dB	25	25	25

Specifications follow BASTA guidelines.

ELECTRICAL SPECIFICATIONS

Y1 Y2 Y3 Y4

Frequency Range		MHz	1710-2690				
		MHz	1710-1880	1850-1990	1920-2170	2300-2400	2490-2690
Polarization		---	±45°				
Gain	Over all Tilts	dBi	14.5 ± 0.6	14.7 ± 0.5	14.8 ± 0.6	14.4 ± 0.6	15.4 ± 0.6
	Max Gain	dBi	15.1	15.2	15.4	15	16
Azimuth Beamwidth (3 dB)		degrees	69.8° ± 5.3°	66.6° ± 3.5°	66.3° ± 4.3°	62° ± 4.4°	54.3° ± 4.6°
Elevation Beamwidth (3 dB)		degrees	13.7° ± 1°	12.6° ± 0.9°	12.1° ± 0.9°	10.9° ± 0.5°	9.9° ± 0.8°
Electrical Downtilt		degrees	2-12°				
Impedance		Ohms	50Ω				
VSWR (Return Loss)		---	1.5:1 (-14 dB)				
Passive Intermodulation		dBc	-150 (3rd Order for 2x20 W Carriers)				
Front-to-Back Ratio, Total Power, ± 30°		dB	21.8	22.3	22.7	22.6	21.7
First Upper Side Lobe Suppression		dB	16.1	15.5	15.8	15.4	13.4
Cross-Pol Over Sector		dB	10	9.4	9.1	6.8	2.9
Cross Polar Discrimination (XPD) at Mechanical Boresight (0°)		dB	21.7	21.1	20	19.4	22.4
Maximum Effective Power Per Port		Watts	250 W				
Cross Polar Isolation		dB	25	25	25	25	25
Interband Isolation		dB	25	25	25	25	25

Specifications follow BASTA guidelines.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

APXVB4LTY14AB_43MQ-C-I20

■ P1

ELECTRICAL SPECIFICATIONS

Cal. Board and S Parameter

Frequency Range	MHz	3300-3800	
	MHz	3300-3600	3600-3800
Coupling between Cal. Port to Input Port	dB	-26 ± 2	
Coupling Amplitude Accuracy	dB	≤ 0.9	
Coupling Phase Accuracy	degrees	$\leq 7^\circ$	
VSWR	---	≤ 1.5	
Maximum Power	Watts	50 W	
ISO Co-Polar at 2-6° Tilt	dB	≥ 19	
ISO Co-Polar at 7-12° Tilt	dB	≥ 25	
ISO Cross-Polar at 2-6° Tilt	dB	≥ 24	
ISO Cross-Polar at 7-12° Tilt	dB	≥ 25	

Specifications follow BASTA guidelines.

■ P1

ELECTRICAL SPECIFICATIONS

Radiation Parameter - Unit Beam

Frequency Range		MHz	3300-3800	
		MHz	3300-3600	3600-3800
Polarization		---	±45°	
Gain	Over all Tilts	dBi	14.3 ± 0.7	14.2 ± 0.8
	Max Gain	dBi	15	15
Azimuth Beamwidth (3 dB)		degrees	78.3° ± 7.4°	67.1° ± 9.2°
Elevation Beamwidth (3 dB)		degrees	9.1° ± 1.1°	8.1° ± 0.8°
Electrical Downtilt		degrees	2-12°	
Impedance		Ohms	50Ω	
VSWR (Return Loss)		---	1.5:1 (-14 dB)	
Front-to-Back Ratio, Total Power, ± 30°		dB	18.2	17.6
First Upper Side Lobe Suppression		dB	15	15.8
Cross-Pol Over Sector		dB	9.1	8
Cross Polar Discrimination (XPD) at Mechanical Boresight (0°)		dB	17.3	16.6

Specifications follow BASTA guidelines.

APXVB4LTY14AB_43MQ-C-I20

■ P1

ELECTRICAL SPECIFICATIONS

Radiation Parameter - Broadcasting Beam

Frequency Range		MHz	3300-3800	
		MHz	3300-3600	3600-3800
Polarization		---	±45°	
Gain	Over all Tilts	dBi	14.8 ± 0.5	15.2 ± 1
	Max Gain	dBi	15.3	16.2
Azimuth Beamwidth (3 dB)		degrees	69.5° ± 6°	60.1° ± 6.5°
Elevation Beamwidth (3 dB)		degrees	8.4° ± 1°	7.8° ± 0.5°
Electrical Downtilt		degrees	2-12°	
Impedance		Ohms	50Ω	
VSWR (Return Loss)		---	1.5:1 (-14 dB)	
Front-to-Back Ratio, Total Power, ± 30°		dB	21	20.3
First Upper Side Lobe Suppression		dB	16.7	16

Specifications follow BASTA guidelines.

■ P1

ELECTRICAL SPECIFICATIONS

Radiation Parameter - Working Beam

Frequency Range		MHz	3300-3800	
		MHz	3300-3600	3600-3800
Polarization		---	±45°	
Gain	Over all Tilts	dBi	19.4 ± 1	19.2 ± 1
	Max Gain	dBi	20.4	20.2
Azimuth Beamwidth (3 dB)		degrees	21.6° ± 1.3°	19.9° ± 1°
Elevation Beamwidth (3 dB)		degrees	8.3° ± 0.5°	7.9° ± 0.7°
Electrical Downtilt		degrees	2-12°	
Impedance		Ohms	50Ω	
VSWR (Return Loss)		---	1.5:1 (-14 dB)	
Front-to-Back Ratio, Total Power, ± 30°		dB	25	25.9
First Upper Side Lobe Suppression		dB	18.7	16.6

Specifications follow BASTA guidelines.


APXVB4LTY14AB_43MQ-C-I20

BOTTOM VIEW - LABELING



ARRAY LAYOUT


ARRAY	FREQUENCY	CONNECTOR	CONNECTOR TYPE	RET	AISG RET UID
■ R1	698-960 MHz	1-2	(2x) 4.3-10 Female	R1	RFxxxxxxxxxx-R1
■ Y1	1710-2690 MHz	3-4	(2x) 4.3-10 Female	Y1	RFxxxxxxxxxx-Y1
■ Y2	1710-2690 MHz	5-6	(2x) 4.3-10 Female	Y2	RFxxxxxxxxxx-Y2
■ Y3	1710-2690 MHz	7-8	(2x) 4.3-10 Female	Y3	RFxxxxxxxxxx-Y3
■ Y4	1710-2690 MHz	9-10	(2x) 4.3-10 Female	Y4	RFxxxxxxxxxx-Y4
■ P1	3300-3800 MHz	11-12	(2x) Cluster Connector MQ4/MQ5	P1	RFxxxxxxxxxx-P1

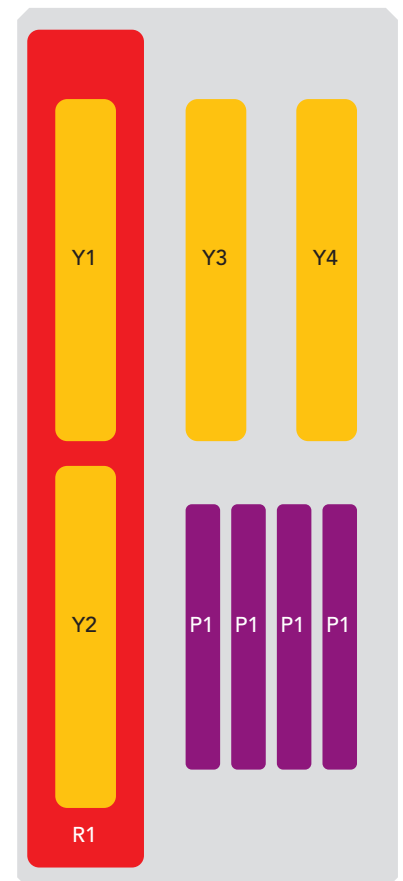

The illustration is not shown to scale.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

APXVB4LTY14AB_43MQ-C-I20

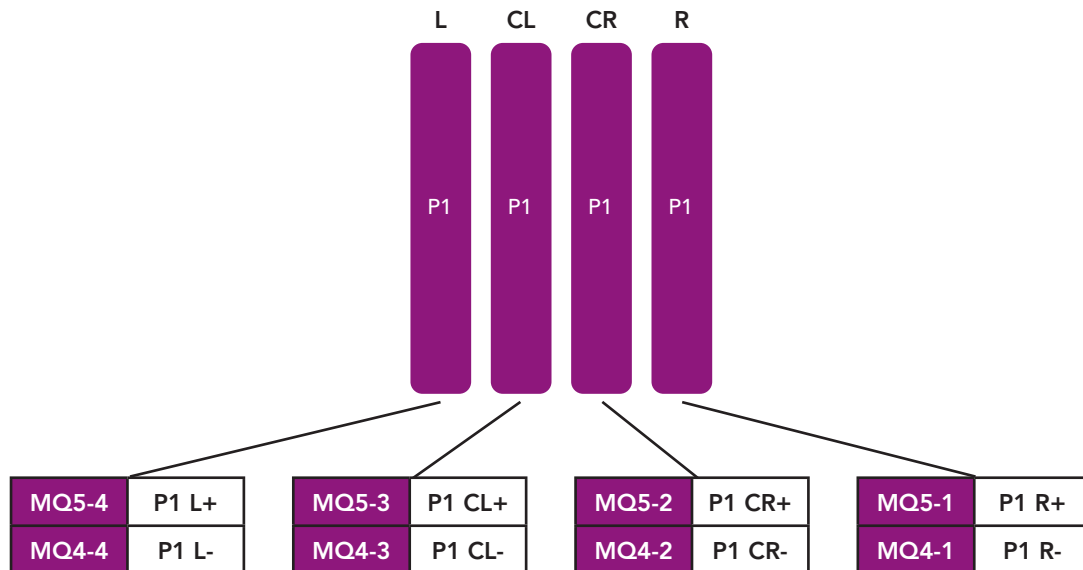

Physical array and port mapping according to AISG naming convention:
Left - Center Left - Center Right - Right (seen from front of antenna)

APXVB4LTY14AB_43MQ-C-I20

MECHANICAL SPECIFICATIONS

Length		mm (in)	1405 (55.3)
Width		mm (in)	429 (16.9)
Depth		mm (in)	199 (7.8)
Net Weight - Antenna Only		kg (lbs)	26.7 (58.9)
Net Weight - Mounting Hardware Only		kg (lbs)	4.5 (9.9)
Wind Load Rated at 150 km/h (93 mph)	Front	N (lbf)	399 (90)
	Side	N (lbf)	404 (91)
	Rear	N (lbf)	463 (104)
Survival Wind Speed / Rated Wind Speed		km/h (mph)	200 (150)
Connector Type		--	(10x) 4.3-10 Female, (2x) Cluster Connectors MQ4/MQ5, (2x) AISG Connectors (1 Male, 1 Female) at Bottom
Radome Color		---	Light Grey RAL7035
Radome Material		---	Fiberglass
Lightning Protection		---	DC Ground
Shipping	Packing Size (Length x Width x Depth)	mm (in)	1675 x 525 x 295 (65.9 x 20.7 x 11.6)
	Shipping Weight	kg (lbs)	37.2 (82)

ENVIRONMENTAL SPECIFICATIONS

Environmental Standard	---	ETS 300 019
Operating Temperature	degrees	-40° to +60° C (-40° to +140° F)
Product Environmental Compliance	---	Product is RoHS Compliant

APXVB4LTY14AB_43MQ-C-I20

ACCESSORIES

Accessories may be ordered separately unless otherwise indicated.

ITEM	MODEL NUMBER	WEIGHT
Beam Tilt Mounting Bracket Kit for Pole Diameter 50-110 mm (2.0-4.3 in) <i>Shipped with antenna</i>	APM50-B1	4.5 kg (9.9 lbs)

INSTALLATION

Please read all installation notes before installing product.




Always attach the antenna using all mounting points.

Do not install antenna with the connectors facing upwards.

EXTERNAL DOCUMENT LINKS

[APM50 Mounting Kit Series Installation Instructions](#)

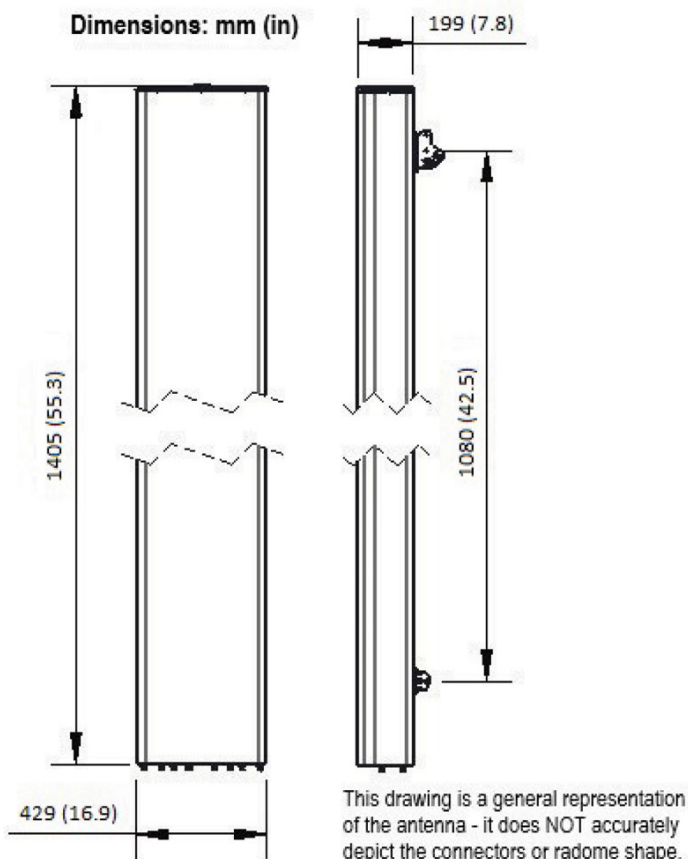

NOTES

Specifications follow BASTA guidelines.

Horizontal dipole column spacing: 55mm

MQ4/MQ5 cluster connectivity follow NGMN.

For additional mounting information, please check **External Document Links**.

For Radiating Patterns: [Request pattern files](#)