

APXVBLL09B_43-C-I20

APXVBLL09B_43-A-I20

Features

- 2 ports / 1 cross pol system in low band (698-960 MHz)
- 4 ports / 2 cross pol systems in high band (1710-2690 MHz)
- Supporting 4x4 MIMO in high band
- Integrated and field replaceable SRET
- ACU HW Version -2.02
- Optional with Direct Pipe No Tilt mounting hardware (Model name suffix -A-I20)
- Compliant with AISG v2.0 and 3GPP



PRODUCT OVERVIEW	Frequency Range (MHz)	(1x) 698-960	(2x) 1710-2690		
	Array	■ R1	■ Y1	■ Y2	
	Connector	1-2	3-4	5-6	
		2 PORTS		4 PORTS	
	Polarization	XPOL		XPOL	
	Azimuth Beamwidth (avg)	65°		65°	
	Electrical Downtilt	2-15°		2-12°	
Dimensions	980 x 350 x 200 mm (38.6 x 13.8 x 7.9 in)				

ORDERING OPTIONS

Select from the following ordering options

ANTENNA MODEL NUMBER	CONFIGURATION	MOUNTING HARDWARE	MOUNTING PIPE DIAMETER	SHIPPING WEIGHT	MOUNTING HARDWARE WEIGHT
APXVBLL09B_43-C-I20	ACU-I20-B3 Internal RET Included	APM50-B1 Beam Tilt Kit Included	50-110 mm (2.0-4.3)	22.5 kg (49.6 lbs)	4.5 kg (9.9 lbs)
APXVBLL09B_43-A-I20	ACU-I20-B3 Internal RET Included	APM50-B1N Direct Pipe No Tilt Mounting Kit Included	50-110 mm (2.0-4.3)	21.4 kg (47.2 lbs)	3.4 kg (7.5 lbs)



Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

APXVBLL09B_43-C-I20

APXVBLL09B_43-A-I20

ELECTRICAL SPECIFICATIONS

■ R1

Frequency Range		MHz	698-960		
		MHz	698-806	790-894	880-960
Polarization		---	±45°		
Gain	Over all Tilts	dBi	12.4 ± 0.5	12.6 ± 0.5	12.9 ± 0.1
	Max Gain	dBi	12.9	13.1	13.0
Azimuth Beamwidth (3 dB)		degrees	66.6° ± 2.5°	67.6° ± 2.5°	66.5° ± 2.5°
Elevation Beamwidth (3 dB)		degrees	24.8° ± 3.0°	21.2° ± 2.0°	19.3° ± 1.0°
Electrical Downtilt		degrees	2-15°		
Impedance		Ohms	50Ω		
VSWR (Return Loss)		---	1.5:1 (-14 dB)		
Passive Intermodulation		dBc	-150 (3rd Order for 2x20 W Carriers)		
Front-to-Back Ratio, Total Power, ± 30°		dB	22.0	20.8	22.0
First Upper Side Lobe		dB	22.0	20.0	17.0
Cross-Pol Over Sector		dB	10	9	12
Cross Polar Discrimination (XPD) at Mechanical Boresight (0°)		dB	26.0	24.2	27.0
Maximum Effective Power Per Port		Watts	350 W		
Cross Polar Isolation		dB	25		
Interband Isolation		dB	25		

ELECTRICAL SPECIFICATIONS

■ Y1

Frequency Range		MHz	1710-2690				
		MHz	1710-1880	1850-1990	1920-2170	2300-2400	2490-2690
Polarization		---	±45°				
Gain	Over all Tilts	dBi	15.1 ± 1.0	15.5 ± 0.5	15.7 ± 0.5	15.7 ± 0.5	15.4 ± 0.5
	Max Gain	dBi	16.1	16.0	16.2	16.2	15.9
Azimuth Beamwidth (3 dB)		degrees	64.6° ± 6.8°	64.2° ± 5.8°	64.3° ± 5.4°	64.6° ± 4.1°	61.4° ± 4.3°
Elevation Beamwidth (3 dB)		degrees	10.3° ± 0.5°	9.6° ± 0.5°	9.2° ± 0.5°	8.6° ± 0.5°	7.8° ± 1.0°
Electrical Downtilt		degrees	2-12°				
Impedance		Ohms	50Ω				
VSWR (Return Loss)		---	1.5:1 (-14 dB)				
Passive Intermodulation		dBc	-150 (3rd Order for 2x20 W Carriers)				
Front-to-Back Ratio, Total Power, ± 30°		dB	18.5	19.0	20.0	19.0	18.0
First Upper Side Lobe		dB	13	14	14	17	13
Cross-Pol Over Sector		dB	8	8	6	9	3
Cross Polar Discrimination (XPD) at Mechanical Boresight (0°)		dB	22	22	23	25	21
Maximum Effective Power Per Port		Watts	250 W				
Cross Polar Isolation		dB	25				
Interband Isolation		dB	25				

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

APXVBLL09B_43-C-I20

APXVBLL09B_43-A-I20

ELECTRICAL SPECIFICATIONS

■ Y2

Frequency Range		MHz	1710-2690				
		MHz	1710-1880	1850-1990	1920-2170	2300-2400	2490-2690
Polarization		---	±45°				
Gain	Over all Tilts	dBi	15.3 ± 0.5	15.9 ± 0.5	16.0 ± 0.1	15.9 ± 0.1	15.7 ± 0.5
	Max Gain	dBi	15.8	16.4	16.1	16.0	16.2
Azimuth Beamwidth (3 dB)		degrees	64.0° ± 4.0°	65.4° ± 4.7°	64.7° ± 5.5°	64.9° ± 3.0°	60.2° ± 3.0°
Elevation Beamwidth (3 dB)		degrees	10.2° ± 0.5°	9.5° ± 0.5°	9.2° ± 0.5°	8.6° ± 0.5°	7.9° ± 0.7°
Electrical Downtilt		degrees	2-12°				
Impedance		Ohms	50Ω				
VSWR (Return Loss)		---	1.5:1 (-14 dB)				
Passive Intermodulation		dBc	-150 (3rd Order for 2x20 W Carriers)				
Front-to-Back Ratio, Total Power, ± 30°		dB	19	20	20	19	18
First Upper Side Lobe		dB	12.0	13.0	14.0	15.0	13.6
Cross-Pol Over Sector		dB	9	9	7	10	2
Cross Polar Discrimination (XPD) at Mechanical Boresight (0°)		dB	20.0	23.5	22.0	22.8	22.0
Maximum Effective Power Per Port		Watts	250 W				
Cross Polar Isolation		dB	25				
Interband Isolation		dB	25				

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

APXVBLL09B_43-C-I20


APXVBLL09B_43-A-I20

BOTTOM VIEW - LABELING



ARRAY LAYOUT

ARRAY	FREQUENCY	CONNECTOR	CONNECTOR TYPE	RET	AISG RET UID
■ R1	698-960 MHz	1-2	(2x) 4.3-10 Female	R1	RFxxxxxxxxxx-R1
■ Y1	1710-2690 MHz	3-4	(2x) 4.3-10 Female	Y1	RFxxxxxxxxxx-Y1
■ Y2	1710-2690 MHz	5-6	(2x) 4.3-10 Female		

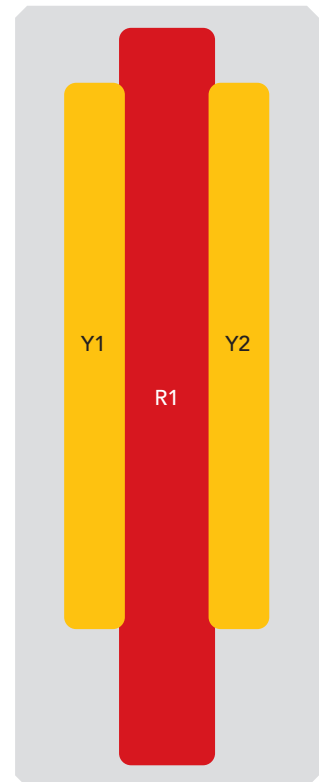

The illustration is not shown to scale.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

APXVBLL09B_43-C-I20

APXVBLL09B_43-A-I20

MECHANICAL SPECIFICATIONS

Length		mm (in)	980 (38.6)
Width		mm (in)	350 (13.8)
Depth		mm (in)	200 (7.9)
Net Weight - Antenna Only		kg (lbs)	14.5 (32)
Wind Load Rated at 150 km/h (93 mph)	Front	N (lbf)	402 (90)
	Side	N (lbf)	215 (48)
	Rear	N (lbf)	221 (50)
Survival Wind Speed		km/h (mph)	200 (124)
Connector Type		--	(6x) 4.3-10 Female, (2x) AISG Connectors (1 Male, 1 Female) at Bottom
Radome Color		---	Light Grey RAL7035
Radome Material		---	Fiberglass
Lightning Protection		---	DC Ground
Shipping	Packing Size (Length x Width x Depth)	mm (in)	1230 x 445 x 295 (48.4 x 17.5 x 11.6)

ENVIRONMENTAL SPECIFICATIONS

Environmental Standard	---	ETS 300 019
Operating Temperature	degrees	-40° to +60° C (-40° to +140° F)
Product Environmental Compliance	---	Product is RoHS Compliant

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

APXVBLL09B_43-C-I20

APXVBLL09B_43-A-I20

ACCESSORIES Accessories may be ordered separately unless otherwise indicated.

ITEM	MODEL NUMBER	WEIGHT
Beam Tilt Mounting Bracket Kit for Pole Diameter 50-110 mm (2.0-4.3 in) <i>Refer to ordering options</i>	APM50-B1	4.5 kg (9.9 lbs)
Direct Pipe No Tilt Bracket Kit for Pole Diameter 50-110 mm (2.0-4.3 in) <i>Refer to ordering options</i>	APM50-B1N	3.4 kg (7.5 lbs)


INSTALLATION Please read all installation notes before installing product.



- Always attach the antenna using all mounting points.
- Do not install antenna with the connectors facing upwards.

EXTERNAL DOCUMENT LINKS

[APM50 Mounting Kit Series Installation Instructions](#)

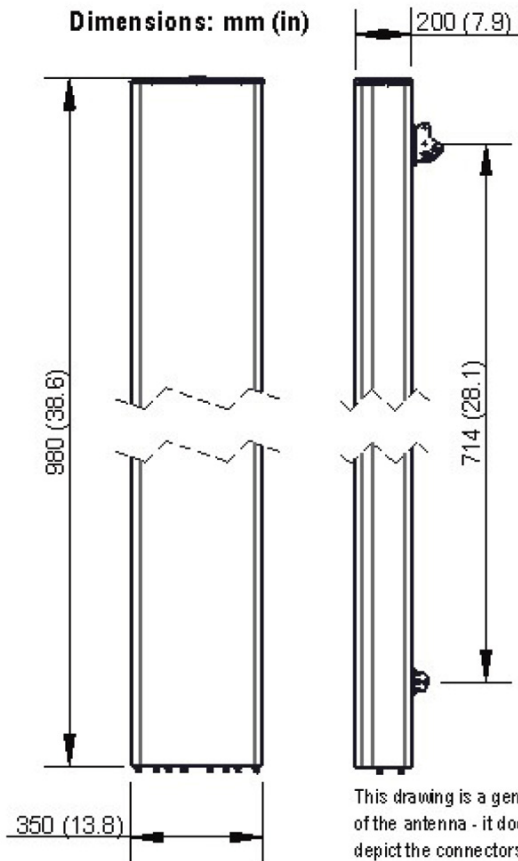

NOTES

Specifications follow BASTA guidelines.

For additional mounting information, please check **External Document Links**.

For Radiating Patterns: [Request pattern files](#)

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.