

BXA-70040-8CF-EDIN-X

Single Band | Panel Antenna | X-Pol | 40° | 20.1 dBi | Fixed Tilt

• Single band, panel antenna with fixed electrical tilt

Ordering Options

When ordering, replace the "X" in the model number with the electrical downtilt. Select from the options listed in the Electrical Downtilt section below.

Electrical Characteristics		696-900 MHz				
Frequency Bands		696-806 MHz		806-900 MHz		
Polarization		±45°				
Horizontal Beamwidth		42°		40°		
Vertical Beamwidth		9°		7°		
Gain		19.6 dBi		20.1 dBi		
Electrical Downtilt		(X) 0, 2, 5				
Impedance		50Ω				
IM3 (2x20W carrier)		-147 dBc				
Upper Sidelobe Suppression (0°)		-15.4 dB		-19.5 dB	-19.5 dB	
Front-to-Back Ratio (±30°)		-37.7 dB		-34.0 dB		
VSWR		1.5:1				
Null Fill		5% (-26.02 dB)				
Isolation Between Ports		20 dB				
Input Power		500 W				
Total Number of Connectors		Antenna has 2 connectors located on the center (back) of the antenna				
Connectors Per Band 696-900 M	lHz	2 Connectors, Elongated 7/16-DIN Female (EDIN)				
Lightning Protection		Direct Ground				
Mechanical Characteristics						
Dimensions (Length x Width x Depth)		2404 × 606 × 200	mm	94.6 × 23.9 × 7.9	in	
Depth with z-brackets		240	mm	9.4	in	
Weight without Mounting Brackets		23	kg	50	lbs	
Wind Area	Front	1.46	m²	15.7	ft²	
	Side	0.48	m²	5.2	ft²	
Survival Wind Speed		> 201	km/hr	> 125	mph	
Wind Load	Front	2093	N	471	lbf	
(161 km/hr or 100 mph)	Side	794	N	179	lbf	




Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.



BXA-70040-8CF-EDIN-X

Single Band | Panel Antenna | X-Pol | 40° | 20.1 dBi | Fixed Tilt

Mounting Options	Part Number	Image	Fits Pipe Diameter	Weight				
All mounting bracket kits are ordered separately unless otherwise indicated. Select from the options listed below.								
3-Point Mounting and Downtilt Bracket Kit	36210008		40-115 mm 1.57-4.5 in	6.9 kg 15.2 lbs				

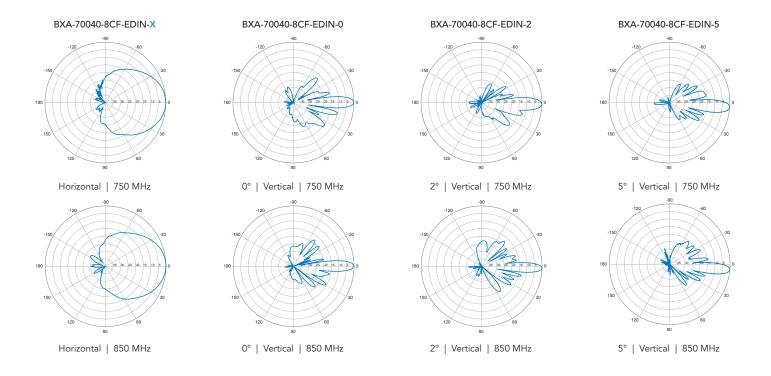

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.