

C2U2VTSP2X06Fwxys4



Features

- Sector & omni configuration with 14 connectors
- Omni arrays in the 696-960, 1695-2700 and 3300-4200 frequencies
- Sectorized arrays in the 3300-4200 frequency
- Ideal for multi-carrier or 4x4 MIMO deployments
- Broadband networks 696-960, 1695-2700 and 3300-4200 MHz
- Easily removable lifting ring

PRODUCT OVERVIEW	Frequency Range (MHz)	(1x) 696-960	(2x) 1695-2700	(2x) 3300-4200	
	Array	■ R1	■ Y1 ■ Y2	■ P1 ■ P2 ■ P3	■ P4
	Connector	2 PORTS	4 PORTS	6 PORTS	2 PORTS
	Polarization	XPOL	XPOL	XPOL	XPOL
	Azimuth Beamwidth (avg)	OMNI	OMNI	SECTORIZED	OMNI
	Electrical Downtilt	0°	2°, 4°, 6°	6°	6°
	Configuration	SECTOR & OMNI COMBINATION			
	Maximum Continuous Power Per Port @ 50° C (122° F)	200 WATTS	100 WATTS	50 WATTS	50 WATTS
	Maximum Total Continuous Power at 50° C (122° F)	1200 WATTS			
	Connector Type	(14x) 4.3-10 FEMALE			
	Dimensions	610 x Ø371 mm (24.0 x Ø14.6 in)			
	Radome Color Options	GREY, BROWN or BLACK			

ELECTRICAL SPECIFICATIONS

Omni

■ R1

Frequency Range		MHz	(1x) 696-960	
Frequency Sub-Range		MHz	696-806	806-960
Polarization		---	±45°	
Gain	BASTA	dBi	6.5 ± 0.8	5.9 ± 0.4
	MAX	dBi	7.3	6.3
Azimuth Beamwidth (3 dB)		degrees	360°	360°
Elevation Beamwidth (3 dB)		degrees	36.8° ± 3.0°	31.1° ± 3.1°
Electrical Downtilt		degrees	(w) 0°	
Impedance		Ohms	50Ω	
VSWR		---	≤ 1.5:1	
Passive Intermodulation 3rd Order for 2x20 W Carriers		dBc	< -153	
Upper Sidelobe Suppression		dB	> 16.3	> 15.6
Isolation	Intraband	dB	> 25	
	Interband	dB	> 28 same band; > 30 different band	

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

C2U2VTSP2X06Fwxys4

ELECTRICAL SPECIFICATIONS Omni

■ Y1 ■ Y2

Frequency Range	MHz	(2x) 1695-2700			
Frequency Sub-Range	MHz	1695-1880	1850-1990	1920-2200	2300-2700
Polarization	---	±45°			
Gain	BASTA	dBi	8.4 ± 0.5	8.5 ± 0.5	8.4 ± 0.7
	MAX	dBi	8.9	9.0	9.1
Azimuth Beamwidth (3 dB)	degrees	360°	360°	360°	360°
Elevation Beamwidth (3 dB)	degrees	21° ± 1.7°	19.3° ± 1.3°	18.6° ± 1.4°	15.3° ± 1.9°
Electrical Downtilt	degrees	(x) 2°, 4°, 6°			
Impedance	Ohms	50Ω			
VSWR	---	≤ 1.5:1			
Passive Intermodulation 3rd Order for 2x20 W Carriers	dBc	< -153			
Upper Sidelobe Suppression	dB	> 14.5	> 14.4	> 14.6	> 14.3
Isolation	Intraband	dB	> 25		
	Interband	dB	> 28 same band; > 30 different band		

ELECTRICAL SPECIFICATIONS Sectorized

■ P1 ■ P2 ■ P3

Frequency Range		MHz	(1x) 3300-4200		
Frequency Sub-Range		MHz	3300-3550	3550-3700	3700-4200
Polarization		---	±45°		
Gain	BASTA	dBi	10.8 ± 0.7	9.9 ± 0.5	9.8 ± 0.7
	MAX	dBi	11.5	10.4	10.5
Azimuth Beamwidth (3 dB)		degrees	69.1° ± 16.8°	85.0° ± 12.5°	88.3° ± 11.8°
Elevation Beamwidth (3 dB)		degrees	20.2° ± 1.4°	19.8° ± 1.2°	19.9° ± 24.2°
Electrical Downtilt		degrees	(y) 6°		
Impedance		Ohms	50Ω		
VSWR		---	≤ 1.5:1		
Passive Intermodulation 3rd Order for 2x20 W Carriers		dBc	< -153		
Upper Sidelobe Suppression		dB	N/A		
Front-to-Back Ratio		dB	> 24.8	> 26.6	> 26.2
Isolation	Intraband	dB	> 25		
	Interband	dB	> 28 same band; > 30 different band		

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

C2U2VTSP2X06Fwxys4

ELECTRICAL SPECIFICATIONS

Omni


■ P4

Frequency Range		MHz	(1x) 3300-4200		
Frequency Sub-Range		MHz	3300-3550	3550-3700	3700-4200
Polarization		---	±45°		
Gain	BASTA	dBi	7.6 ± 0.8	7.0 ± 0.8	6.2 ± 0.6
	MAX	dBi	8.4	7.8	6.8
Azimuth Beamwidth (3 dB)		degrees	360°	360°	360°
Elevation Beamwidth (3 dB)		degrees	20.0° ± 2.4°	18.4° ± 1.1°	17.3° ± 2.4°
Electrical Downtilt		degrees	(y) 6°		
Impedance		Ohms	50Ω		
VSWR		---	≤ 1.5:1		
Passive Intermodulation 3rd Order for 2x20 W Carriers		dBc	< -153		
Upper Sidelobe Suppression		dB	> 12.8	> 12.1	> 10.1
Isolation	Intraband	dB	> 25		
	Interband	dB	> 28 same band; > 30 different band		

C2U2VTSP2X06Fwxys4

MECHANICAL SPECIFICATIONS

Antenna	Height	mm (in)	610 (24.0)
	Diameter	mm (in)	371 (14.6)
Net Weight - Antenna Only		kg (lbs)	10.9 (24)
Windload	Calculation	km/h (mph)	160 (100)
	Frontal	N (lbf)	191 (43)
Survival Wind Speed		km/h (mph)	241 (150)
Wind Area		m ² (ft ²)	0.22 (2.4)
Volume		m ³ (ft ³)	0.07 (2.3)
Connector	Type	---	(14x) 4.3-10 Female
	Position	---	Bottom
Radome Color		---	Grey (RAL 7035), Brown (RAL 8022), Black (RAL 9011)
Lightning Protection (Grounding Type)		---	Direct Ground

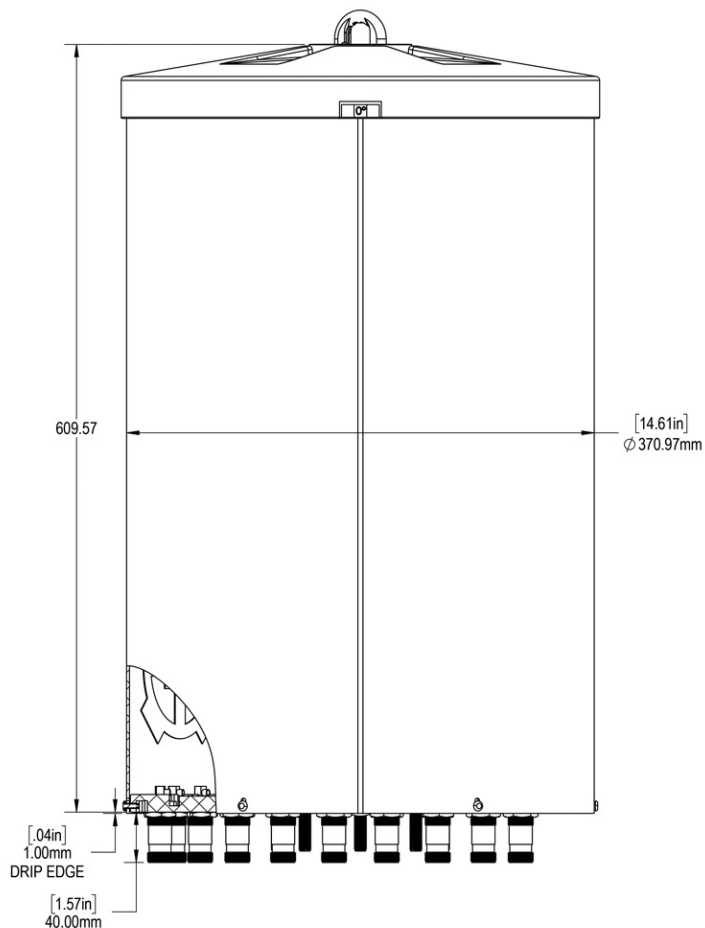


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

C2U2VTSP2X06Fwxys4

ARRAY LAYOUT Topology


FREQUENCY	ARRAY	CONNECTOR	CONNECTOR TYPE
696-960 MHz	■ R1	1-2	(2x) 4.3-10 Female
1695-2700 MHz	■ Y1	3-4	(2x) 4.3-10 Female
1695-2700 MHz	■ Y2	5-6	(2x) 4.3-10 Female
3300-4200 MHz	■ P1	7-8	(2x) 4.3-10 Female
	■ P2	9-10	(2x) 4.3-10 Female
	■ P3	11-12	(2x) 4.3-10 Female
3300-4200 MHz	■ P4	13-14	(2x) 4.3-10 Female

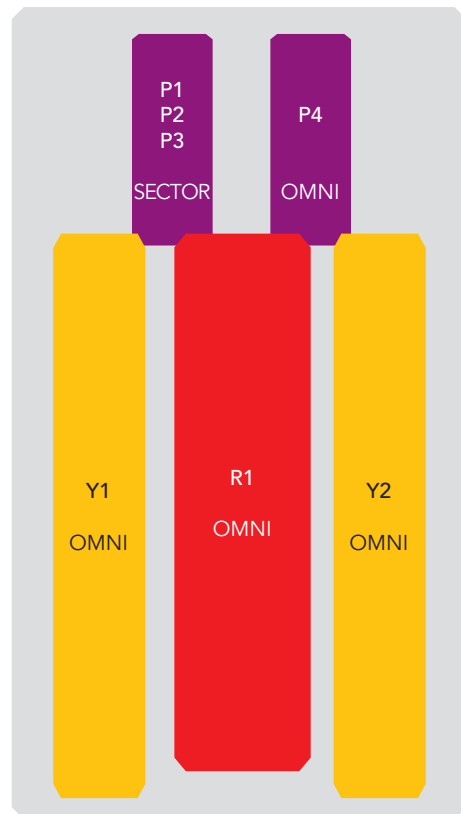

The illustration is not shown to scale.


C2U2VTSP2X06Fwxy_s4

BOTTOM VIEW - LABELING

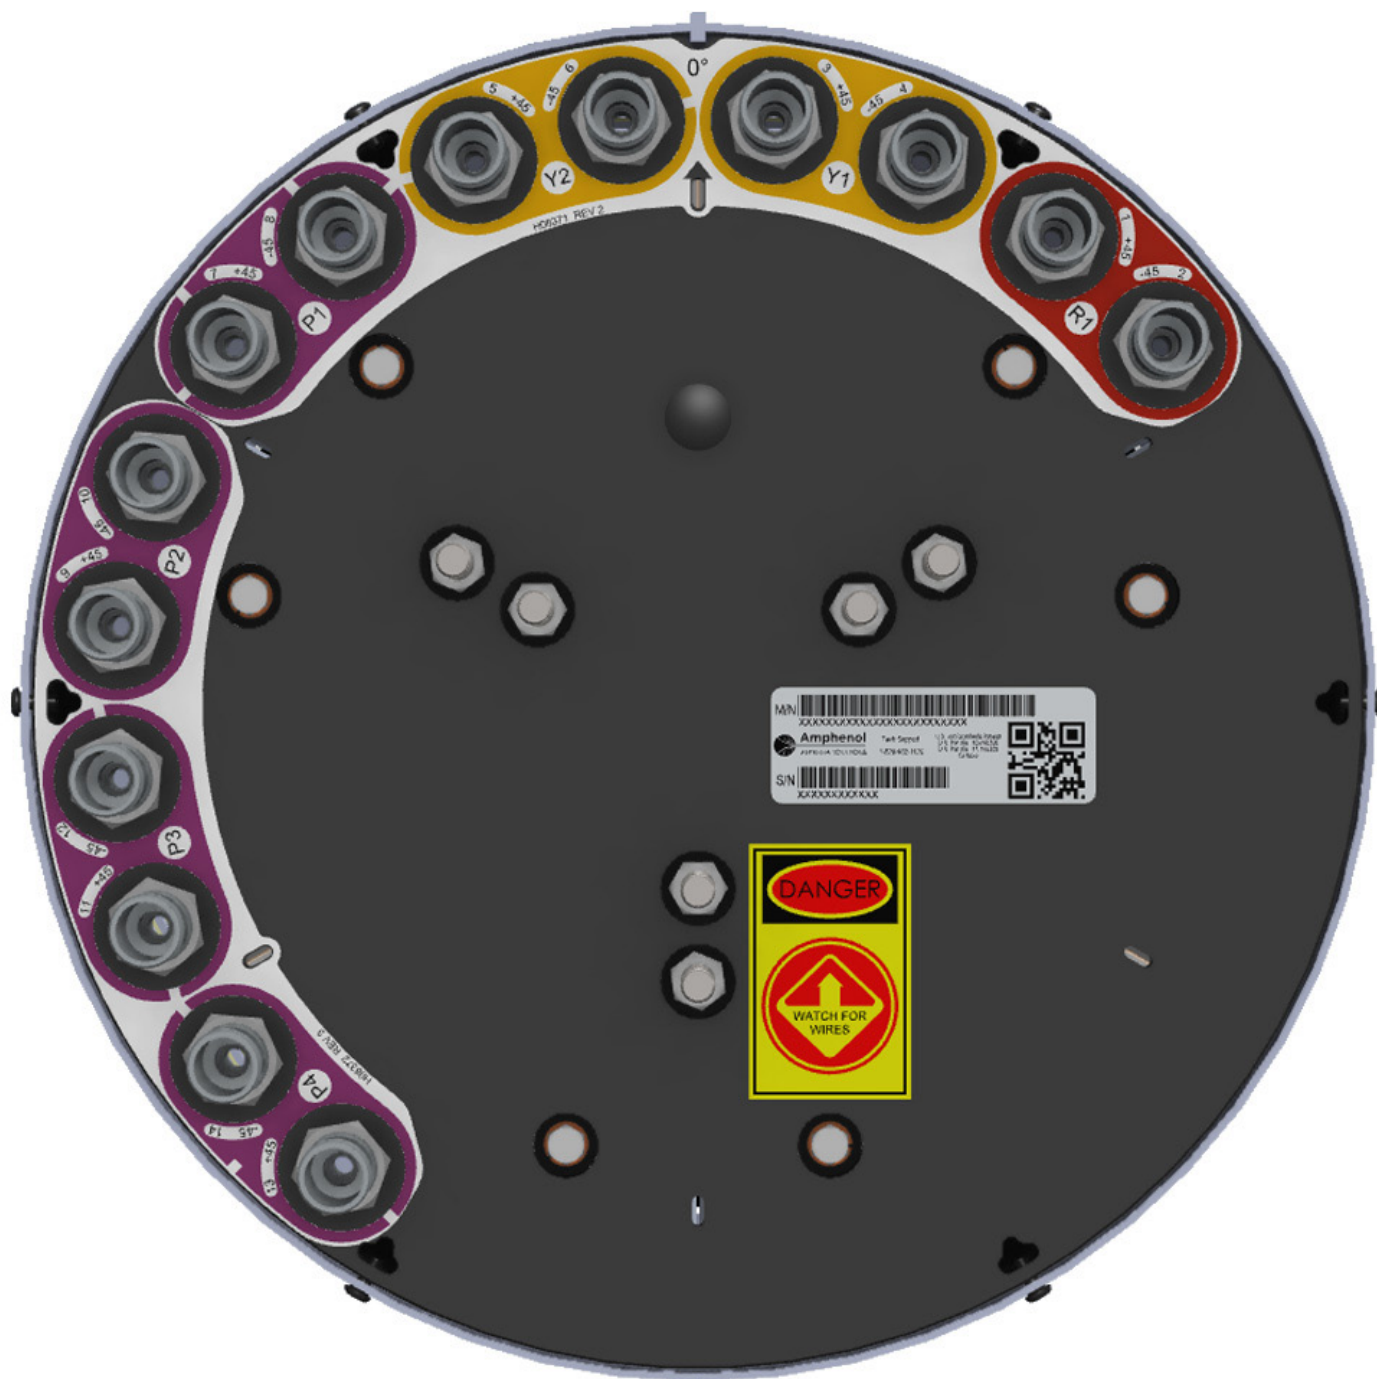

C2U2VTSP2X06FwxyS4

BOTTOM VIEW - CONNECTOR DIAGRAM

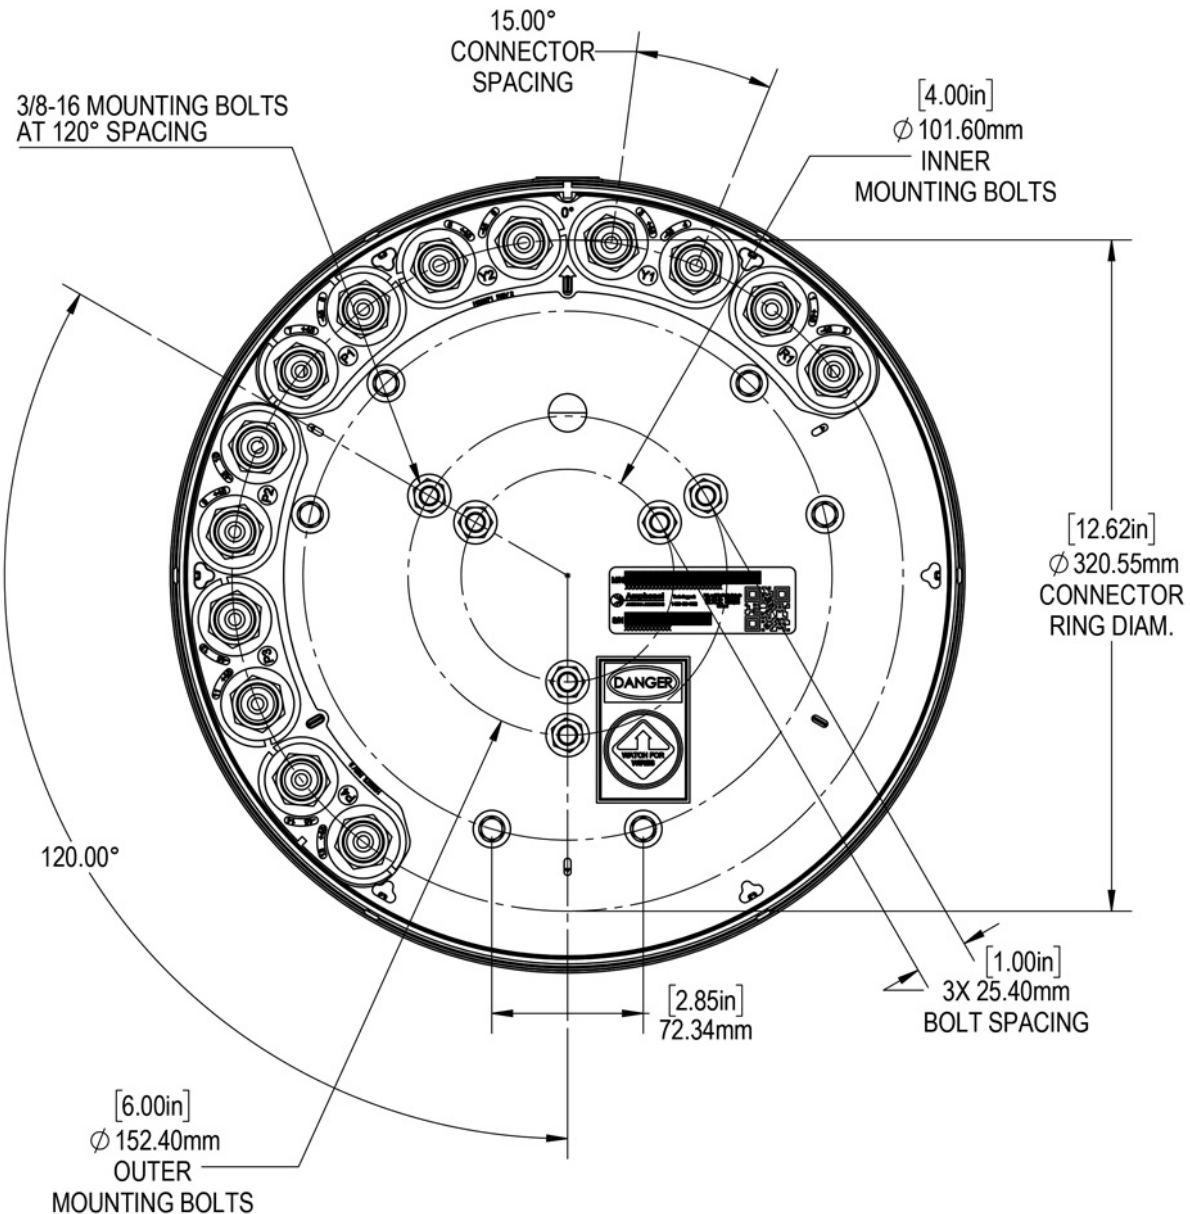

INSTALLATION Please read all installation notes before installing this product.



Always attach the antenna using all mounting points.

Do not install the antenna with the connectors facing upwards.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

C2U2VTSP2X06Fwxys4

MOUNTING KITS Select from the following mounting options when ordering. Mounting kits for canister antennas are ordered as a separate line item.

MODEL NUMBER		DESCRIPTION
CWT-MKS-SIDE		SIDE MOUNTING BRACKET KIT FOR CANISTER ANTENNA
CWT-MKS-TOP		TOP MOUNTING BRACKET KIT FOR CANISTER ANTENNA
WB3X-MKS-01		UTILITY POLE MOUNTING BRACKET KIT FOR CANISTER ANTENNA
CWT-MKS-BASE-xx		WIDE DIAMETER POLE TOP MOUNTING BRACKET KIT FOR CANISTER ANTENNA. AVAILABLE IN BROWN, BLACK AND GREY TO MATCH ANTENNA RADOME AND/OR MOUNTING STRUCTURE.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

C2U2VTSP2X06Fwxy^s4

HOW TO READ THE MODEL NUMBER

Each letter and number has meaning.

NUMBER OF BANDS & OPERATING FREQUENCY			PATTERN TYPE	AZIMUTH BWWDTH	POLARIZATION	LENGTH	TILT TYPE	TILT OPTIONS	CONNECTOR TYPE	VARIATION	RADOME COLOR OPTIONS
C	2U	2V	T	SP2	X	06	F	wxy	s	4	BK BR
(1x) 696-960	(2x) 1695-2700	(2x) 3300-4200	Tri-Sector	Sector & Omni Combination	XPOL	0.6 meters	Fixed Tilt	These letters are placeholders for fixed tilt options. Refer to Electrical Specifications for available tilt options.	4.3-10 Connector	4th generation enhanced mechanical package	BK indicates a Black radome. BR indicates a Brown radome. The default radome color is Grey. No letters are required for a Grey radome.

ORDERING OPTIONS

Select from the following ordering options

SELECT RADOME COLOR	SELECT DEGREE OF ELECTRICAL DOWNTILT FOR EACH BAND			ANTENNA MODEL
	696-960 MHz	1695-2700 MHz	3300-4200 MHz	
Grey RAL 7035	0°	2°	6°	C2U2VTSP2X06F026s4
	0°	4°	6°	C2U2VTSP2X06F046s4
	0°	6°	6°	C2U2VTSP2X06F066s4
Black RAL 9011	0°	2°	6°	C2U2VTSP2X06F026s4BK
	0°	4°	6°	C2U2VTSP2X06F046s4BK
	0°	6°	6°	C2U2VTSP2X06F066s4BK
Brown RAL 8022	0°	2°	6°	C2U2VTSP2X06F026s4BR
	0°	4°	6°	C2U2VTSP2X06F046s4BR
	0°	6°	6°	C2U2VTSP2X06F066s4BR

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


C2U2VTSP2X06Fwxys4

750 MHz —————


850 MHz —————

■ R1, 0° TILT

+45°




Azimuth




Elevation

-45°



Azimuth




Elevation


C2U2VTSP2X06Fwxys4

1800 MHz —
1900 MHz —
2100 MHz —
2300 MHz —
2600 MHz —


Y1, 2° TILT

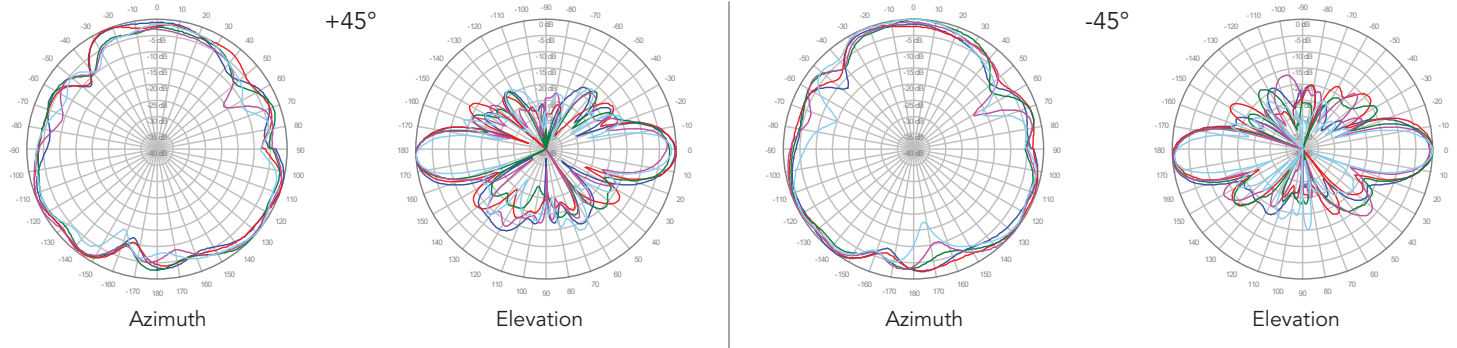


Y2, 2° TILT

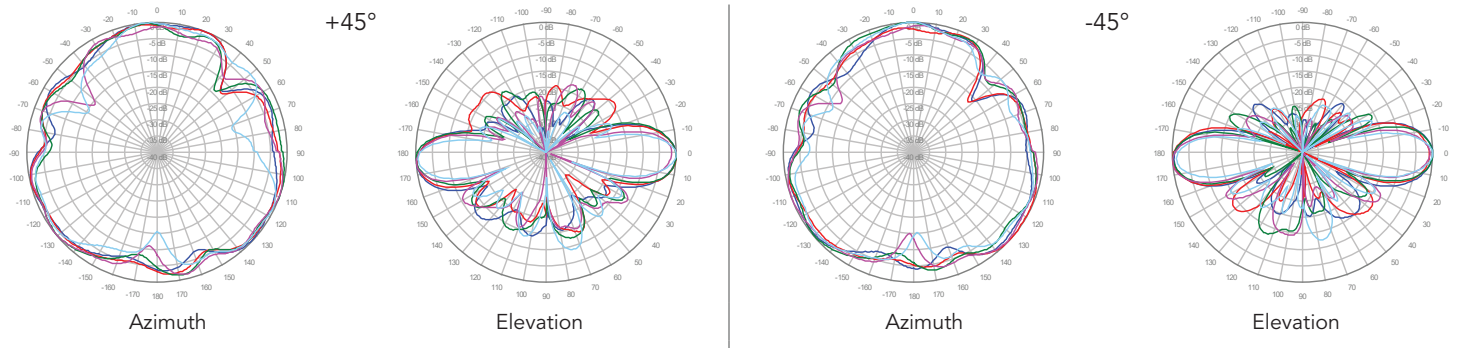

Y1, 4° TILT

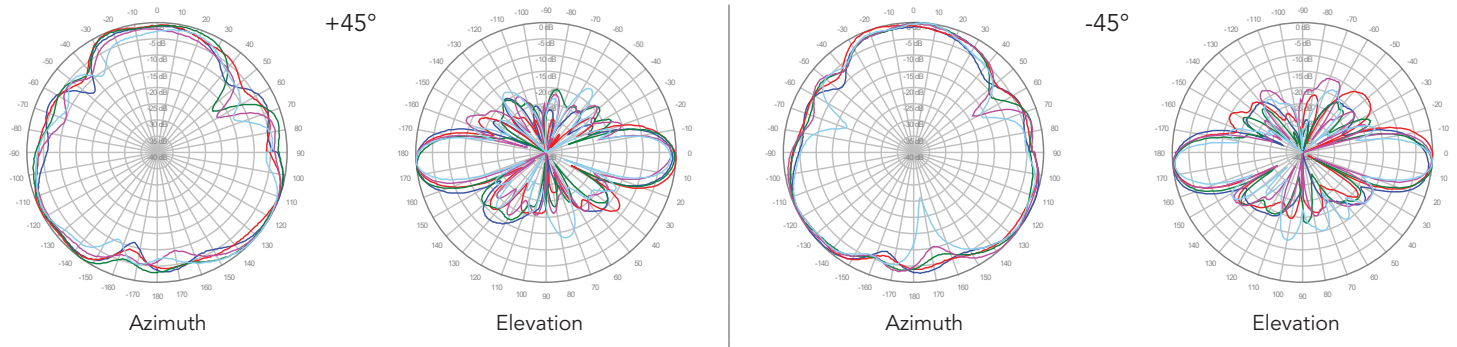

Y2, 4° TILT

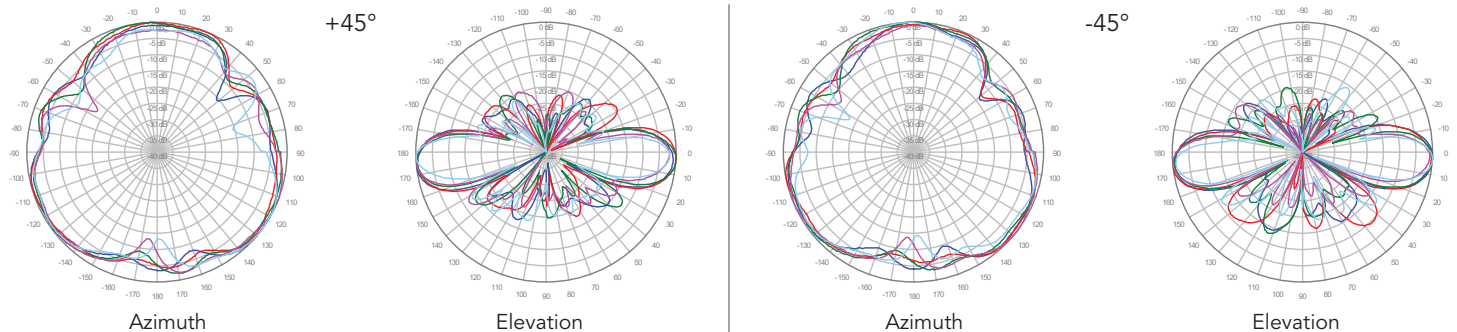


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


C2U2VTSP2X06Fwxys4

1800 MHz —
1900 MHz —
2100 MHz —
2300 MHz —
2600 MHz —

■ Y1, 6° TILT

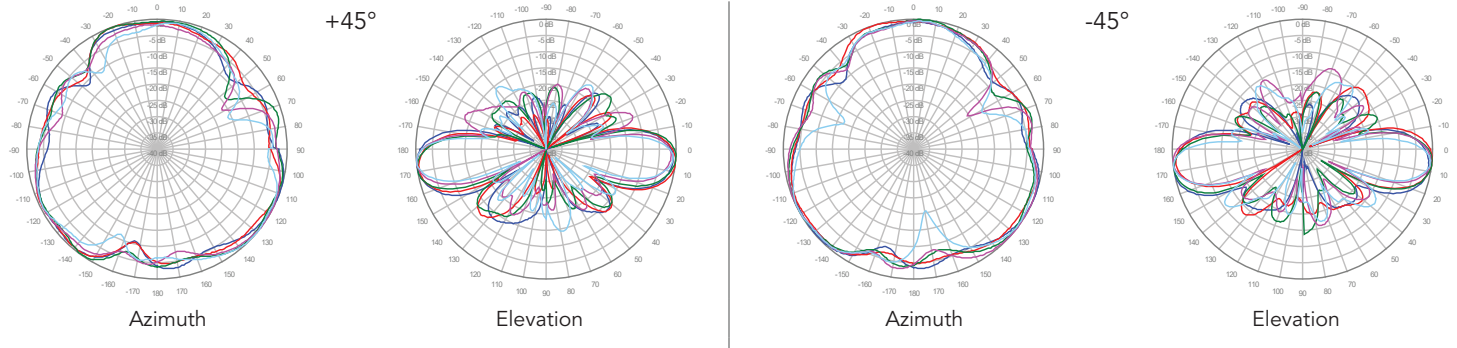


■ Y2, 6° TILT

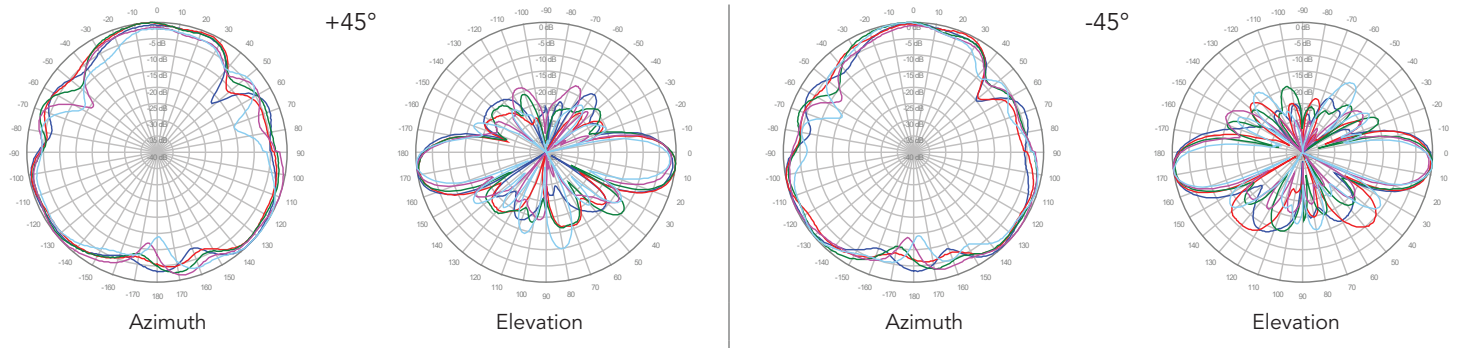


3600 MHz ————
4000 MHz ————

C2U2VTSP2X06Fwxys4


P1, 6° TILT

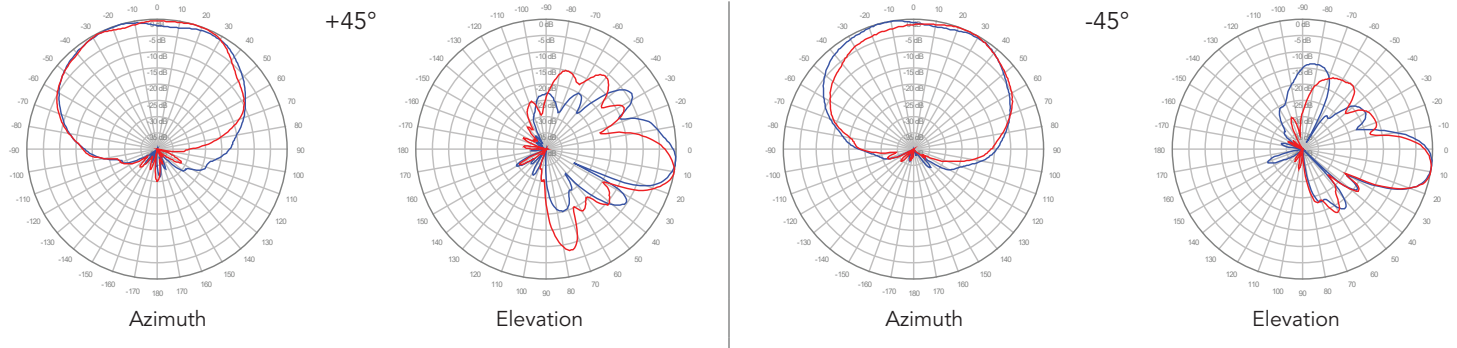


P2, 6° TILT

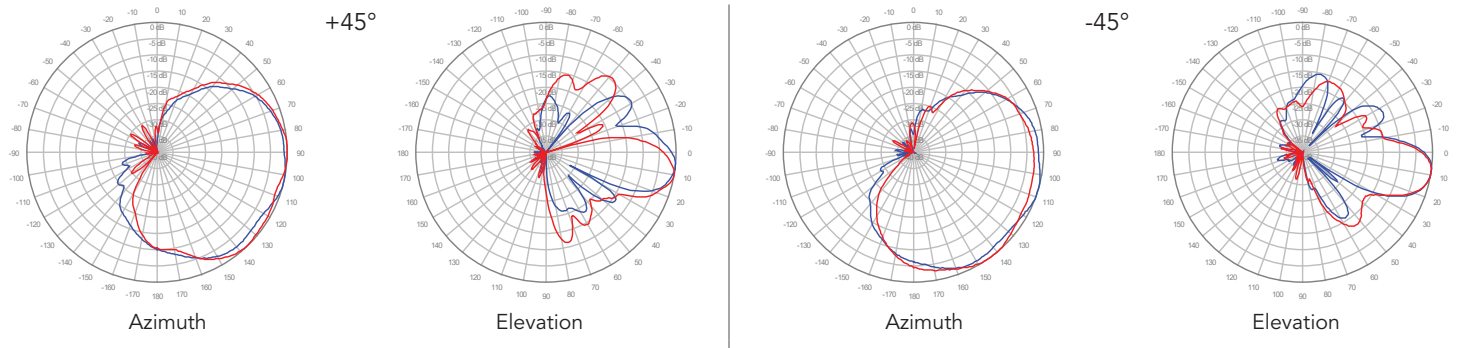

P3, 6° TILT

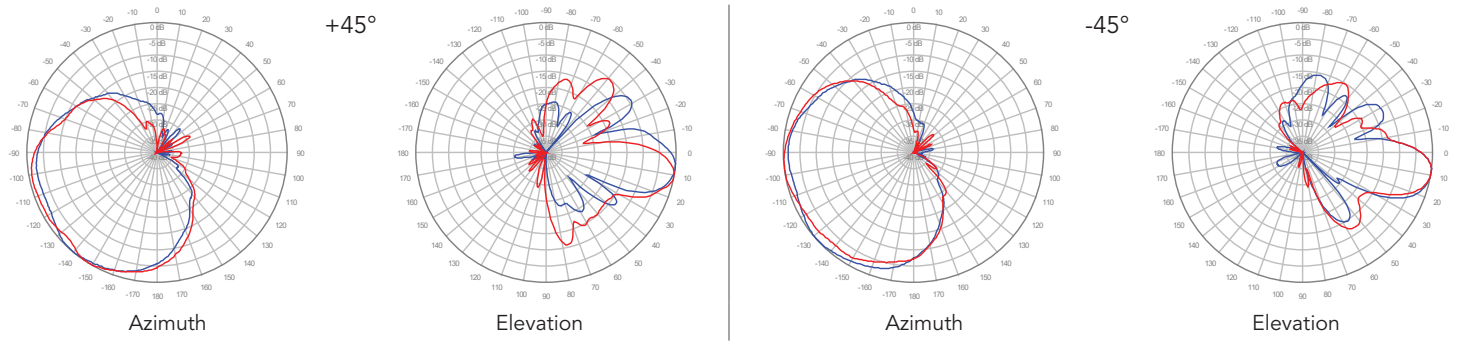

P4, 6° TILT

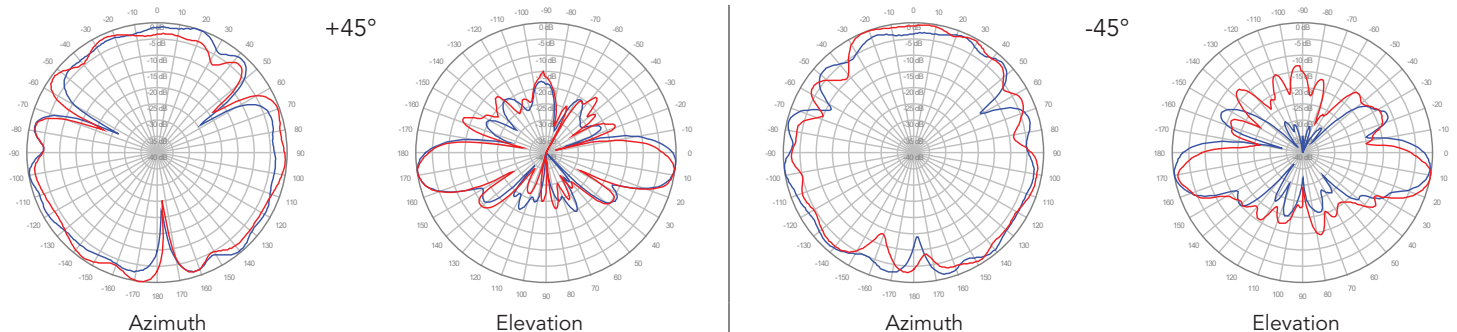

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.