

CUUT070X06Fxyz0

TRI BAND | 3-SECTOR, CLOVER-SHAPE | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)

Features

- 3-Sector, Clover-Shape configuration with 18 connectors
- Ideal for Small Cell / DAS applications
- Available with 4.3-10 or 7/16-DIN connectors
- Four unique mounting options
- Available for order with a grey, brown or black radome



Connector Description

The antenna has 18 connectors located at the bottom.

Low Band	■ R1	696-960 MHz	(6x) 4.3-10 or 7/16-DIN Female
Mid Band #1	■ Y1	1695-2700 MHz	(6x) 4.3-10 or 7/16-DIN Female
Mid Band #2	■ Y2	1695-2700 MHz	(6x) 4.3-10 or 7/16-DIN Female

Electrical Characteristics	■ R1		■ Y1 ■ Y2			
	696-960 MHz		(2x) 1695-2700 MHz			
Frequency Bands (MHz)	696-806	806-960	1695-1880	1850-1990	1920-2200	2300-2700
Polarization	±45°		(2x) ±45°			
Horizontal Beamwidth	75°	70°	75°	76°	77°	63°
Vertical Beamwidth	42°	40°	17°	16°	15°	14°
Gain	9.0 dBi	10.0 dBi	13.0 dBi	13.5 dBi	14.0 dBi	14.3 dBi
Electrical Downtilt (°)	(x) 0, 5		(y) 0, 4, 6			
Impedance	50Ω		50Ω			
VSWR	≤ 1.5:1		≤ 1.5:1			
Upper Sidelobe Suppression	> 15 dB		> 15 dB			
Front-to-Back Ratio	> 30 dB		> 30 dB			
Isolation Between Ports	23 dB		22 dB			
IM3 (2x20W carrier)	< -153 dBc		< -153 dBc			
Input Power	(6x) 500 W		(12x) 300 W			
Diplexed	No					
Number of Sectors, Sector Spacing and/or Pattern Shape	3 Sectors, 120° Spacing, Clover-Shape					
Lightning Protection	Direct Ground					

Mechanical Characteristics


Antenna Dimensions (Height x Diameter)	610 x 371 mm	24.0 x 14.6 in
Weight without Mounting Bracket Kit	11.8 kg	26.0 lbs
Antenna Volume	0.07 m ³	2.3 ft ³
Survival Wind Speed	241 km/hr	150 mph
Wind Area	0.22 m ²	2.4 ft ²
Wind Load (160 km/hr or 100 mph)	191 N	43 lbf

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

CUUT070X06Fxyz0

TRI BAND | 3-SECTOR, CLOVER-SHAPE | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)

Bottom View - Labeling

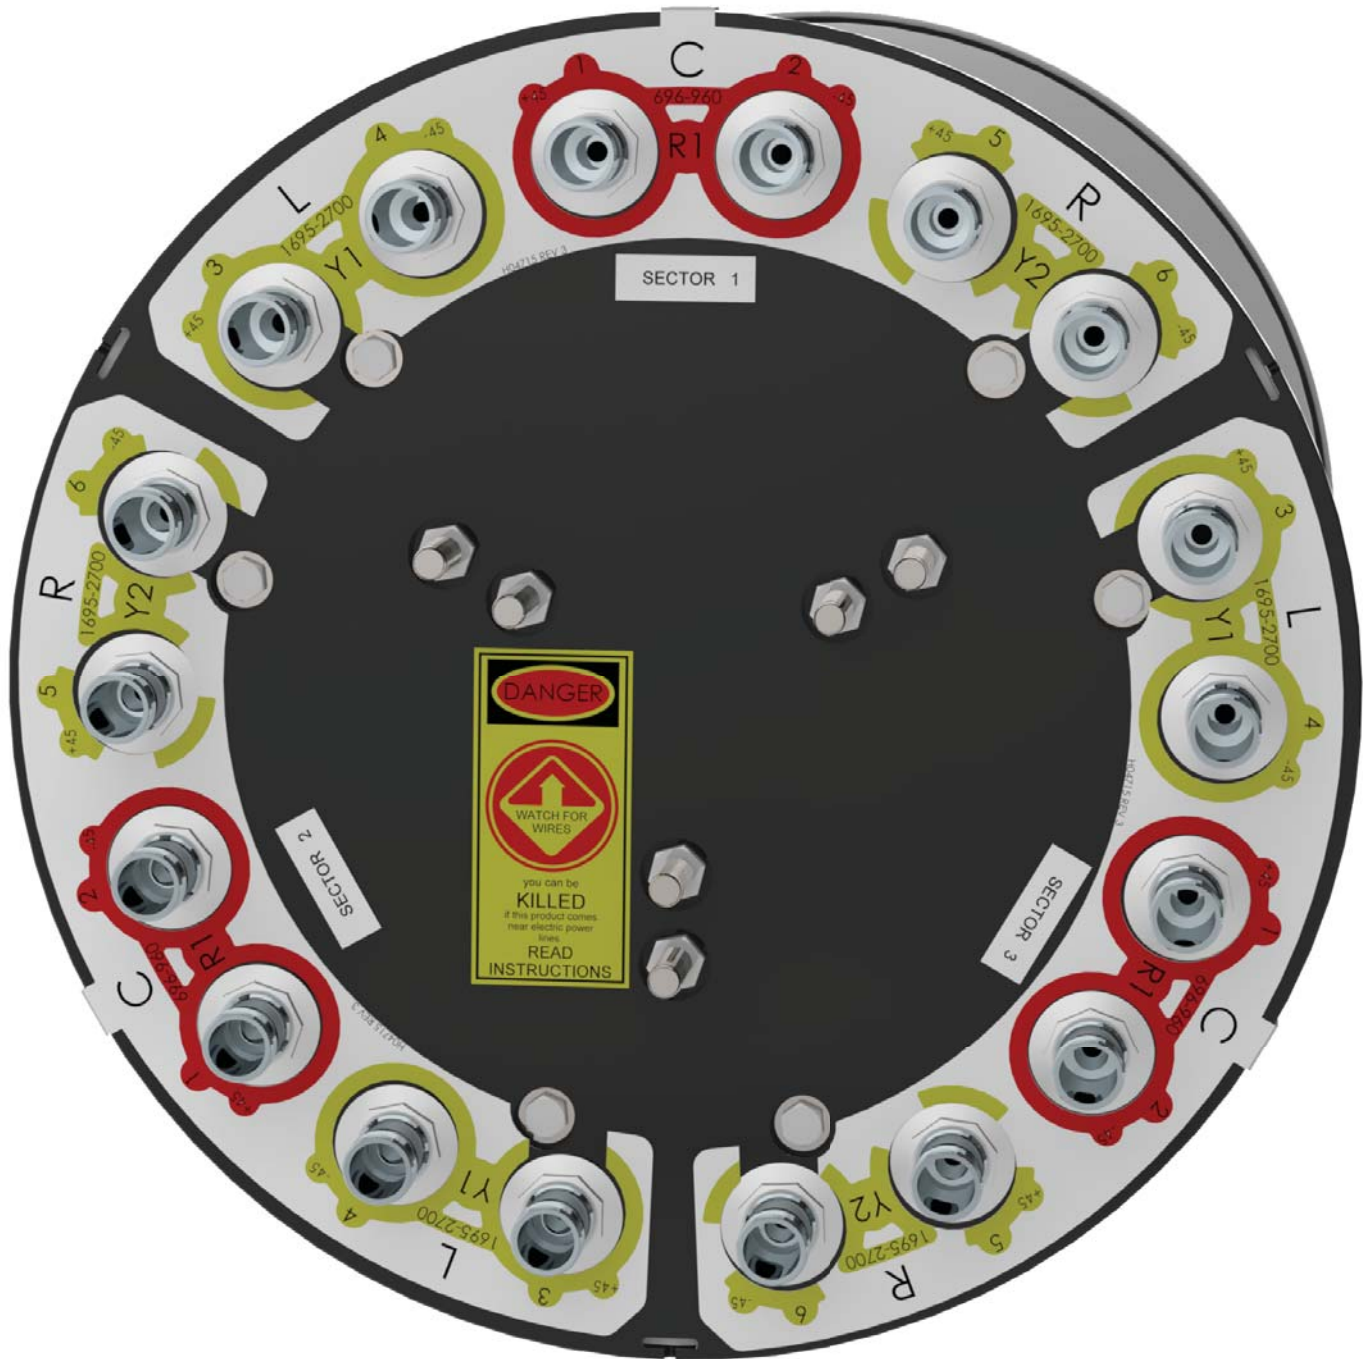


Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

CUUT070X06Fxyz0

TRI BAND | 3-SECTOR, CLOVER-SHAPE | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)

Bottom View - Connector Diagram

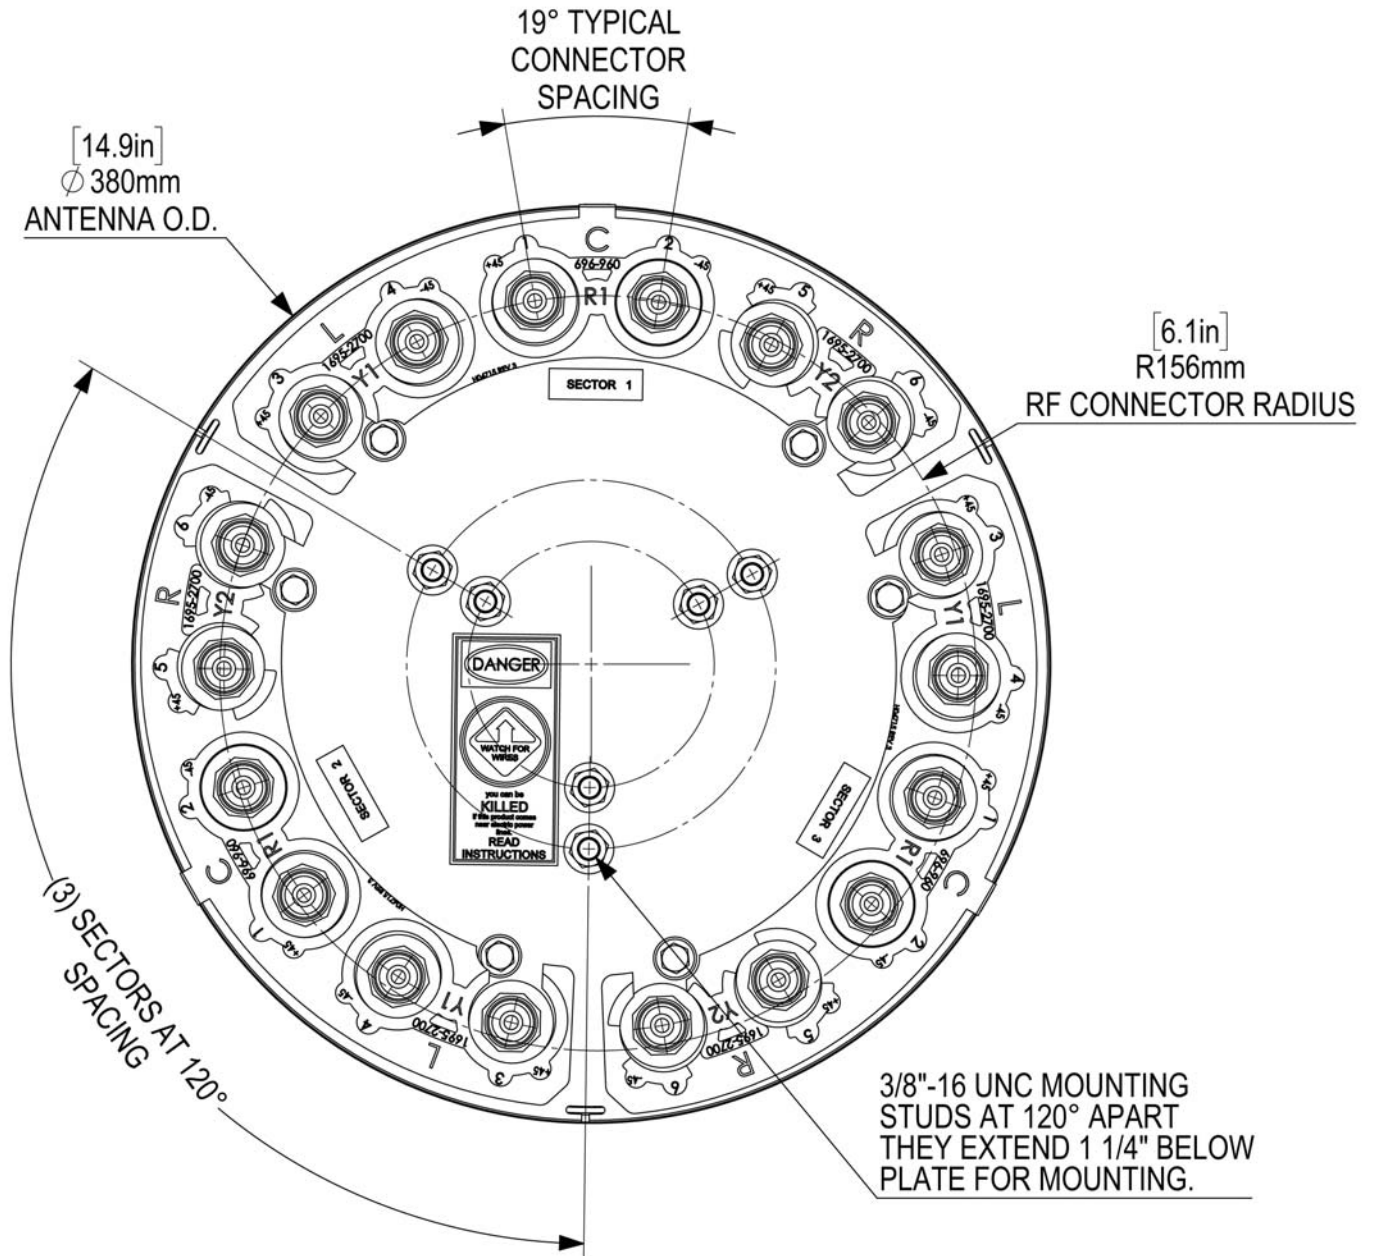

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

CUUT070X06Fxyz0

TRI BAND | 3-SECTOR, CLOVER-SHAPE | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)

Ordering Options

When ordering, select the Radome Color, Degree of Electrical Downtilt for the Low (x) and Mid Bands (y) and the Connector Type (z).

Radome Color	Electrical Downtilt Degree		Connector Type (z)	
	Low Band ■ R1 (x)	Mid Band ■ Y1 ■ Y2 (y)	4.3-10 Female	7/16-DIN Female
Grey Pantone 420 C	0°	0°	CUUT070X06F00s0	CUUT070X06F00D0
	0°	4°	CUUT070X06F04s0	CUUT070X06F04D0
	0°	6°	CUUT070X06F06s0	CUUT070X06F06D0
	5°	0°	CUUT070X06F50s0	CUUT070X06F50D0
	5°	4°	CUUT070X06F54s0	CUUT070X06F54D0
	5°	6°	CUUT070X06F56s0	CUUT070X06F56D0
Brown Pantone 476 C	0°	0°	CUUT070X06F00s0BR	CUUT070X06F00D0BR
	0°	4°	CUUT070X06F04s0BR	CUUT070X06F04D0BR
	0°	6°	CUUT070X06F06s0BR	CUUT070X06F06D0BR
	5°	0°	CUUT070X06F50s0BR	CUUT070X06F50D0BR
	5°	4°	CUUT070X06F54s0BR	CUUT070X06F54D0BR
	5°	6°	CUUT070X06F56s0BR	CUUT070X06F56D0BR
Black RAL 9011	0°	0°	CUUT070X06F00s0BK	CUUT070X06F00D0BK
	0°	4°	CUUT070X06F04s0BK	CUUT070X06F04D0BK
	0°	6°	CUUT070X06F06s0BK	CUUT070X06F06D0BK
	5°	0°	CUUT070X06F50s0BK	CUUT070X06F50D0BK
	5°	4°	CUUT070X06F54s0BK	CUUT070X06F54D0BK
	5°	6°	CUUT070X06F56s0BK	CUUT070X06F56D0BK

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

CUUT070X06Fxyz0

TRI BAND | 3-SECTOR, CLOVER-SHAPE | CANISTER ANTENNA | X-POL | FIXED TILT | 610 MM (24.0 IN)

Mounting Kits

This antenna can be mounted using any of the following mounting kits. Mounting kits must be ordered separately.

Side Mounting Bracket Kit	Top Mounting Bracket Kit	Utility Pole Mounting Bracket Kit	Wide Diameter Pole Top Mounting Bracket Kit
CWT-MKS-SIDE	CWT-MKS-TOP	WB3X-MKS-01	CWT-MKS-BASE-xx
			

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.