

# ETP 1000

## Non-Working Antenna Form, 1000 mm

### **MECHANICAL SPECIFICATIONS**

Length			mm (in)	1000 (39.3)	
Width		mm (in)	432 (17.0)		
Depth			mm (in)	175 (6.8)	
Net Weight - Antenna Only			kg (lbs)	11.5 ± 1 (25.3 ± 2.2)	
Mechanical Distance Between Mounting Points			mm (in)	750 (29.5)	
Windl		Calculation	km/h (mph)	150 (93.2)	
•	991-1-4:2005 using Tunnel Coefficients)	Frontal	N (lbf)	350 (78.6)	
		Lateral	N (lbf)	200 (44.9)	
		Rearside	N (lbf)	400 (89.9)	
Survival Wind Speed			km/h (mph)	200 (124)	
Radome Color				Gray RAL7035	
Radome Material				Outdoor Fiberglass	
БĽ	Each shipping box will contain one (1) unit of ETP 1000.				
Shipping	Shipping Dimensions (Length x Width x Depth)		mm (in)	1600 x 487 x 310 (62.9 x 19.1 x 12.2)	
	Shipping Volume		m³ (ft³)	0.242 (8.5)	




## **ACCESSORIES** All accessories are ordered separately unless otherwise indicated

ITEM	MODEL NUMBER	WEIGHT
Brackets for pole Ø48 to Ø115 mm (Ø1.9 to Ø4.5 in) <i>delivered as standard</i>	0900181/00	3.4 kg (7.5 lbs)
Brackets for pole Ø70 to Ø150 mm (Ø2.8-Ø5.9 in) <b>optional</b>	0900182/00	3.9 kg (8.6 lbs)
Kit to add mechanical tilt (0° to 10°) to above brackets <b>optional</b>	0900396/00	2.3 kg (5.1 lbs)

#### **INSTALLATION** Please read all installation notes before installing this product.



Always attach the antenna by all mounting points.

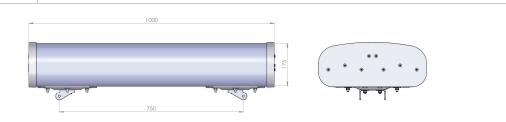



Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.