

HTXC8517x000


X-Pol | VET Panel | 85° | 16.5 dBi

Ordering Options							
When ordering...	Replace "x" with "M" for Manual Electrical Tilt or "R" for Remote Electrical Tilt						
Manual Electrical Tilt	HTXC8517M000						
Remote Electrical Tilt AISG v1.1	HTXC8517R000						
Remote Electrical Tilt AISG v2.0 / 3GPP	HTXC8517R000G						
Remote Electrical Tilt Ericsson Proprietary	HTXC8517R000E						
Electrical Characteristics							
	696-900 MHz						
Frequency bands	696-806 MHz 806-900 MHz						
Polarization	±45°						
Horizontal beamwidth	83° 85°						
Vertical beamwidth	8° 7°						
Gain	13.9 dBd (16.0 dBi) 14.4 dBd (16.5 dBi)						
Electrical downtilt	0-10°						
Impedance	50Ω						
VSWR	≤1.5:1						
Upper sidelobe suppression (0°)	> 16 dB > 16 dB						
Front-to-back ratio (+/-30°)	> 30 dB > 30 dB						
Isolation between ports	< -25 dB						
IM3 (2x20W carrier)	-150 dBc						
Input power	500 W						
Lightning protection	Direct Ground						
Connector(s)	2 Ports / EDIN / Female / Bottom						
Mechanical Characteristics							
Dimensions HTXC8517M000 (LxWxD)	2411 x 304 x 180 mm 94.9 x 12.0 x 7.1 in						
Dimensions HTXC8517R000 (LxWxD)	2590 x 304 x 194 mm 102.0 x 12.0 x 7.6 in						
Depth with z-brackets	220 mm 8.7 in						
Weight without mounting brackets	18 kg 39.7 lbs						
Survival wind speed	> 201 km/hr > 125 mph						
Wind loads (160 km/hr or 100 mph)	Front: 1201 N; Side: 700 N Front: 270 lbf; Side: 157 lbf						
Remote Electrical Downtilt Control							
Remote Electrical Tilt (RET) Control	The remote control of the electrical tilt is managed by an external unit.						
RET Module Part Number (one per antenna)	RETU-EB01 for AISG v1.1 protocol (one unit included with HTXC8517R000) RETU-EG01 for AISG v2.0 / 3GPP protocol (one unit included with HTXC8517R000G) RETU-EE01 for Ericsson Proprietary protocol (one unit included with HTXC8517R000E)						
Mounting Options							
	<table border="1"> <thead> <tr> <th>Part Number</th> <th>Fits Pipe Diameter</th> <th>Weight</th> </tr> </thead> <tbody> <tr> <td>3-Point Mounting & Downtilt Bracket Kit</td> <td>40-115 mm 1.57-4.5 in</td> <td>6.9 kg 15.2 lbs</td> </tr> </tbody> </table>	Part Number	Fits Pipe Diameter	Weight	3-Point Mounting & Downtilt Bracket Kit	40-115 mm 1.57-4.5 in	6.9 kg 15.2 lbs
Part Number	Fits Pipe Diameter	Weight					
3-Point Mounting & Downtilt Bracket Kit	40-115 mm 1.57-4.5 in	6.9 kg 15.2 lbs					




HTXC8517R000

Bottom View/Dimensions

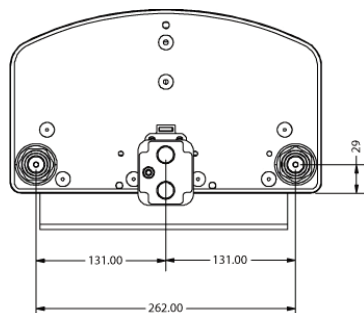


Side View/Dimensions

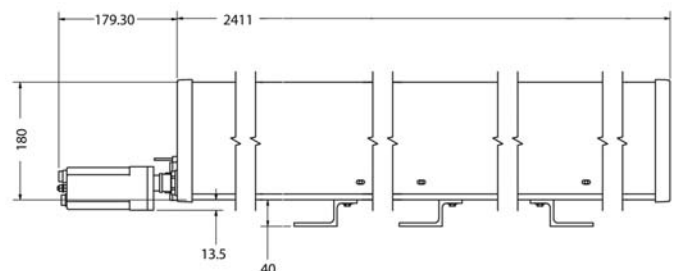


Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

HTXC8517x000


X-Pol | VET Panel | 85° | 16.5 dBi




Horizontal | 750 MHz




0° | Vertical | 750 MHz




2° | Vertical | 750 MHz




4° | Vertical | 750 MHz




6° | Vertical | 750 MHz




Horizontal | 850 MHz




0° | Vertical | 850 MHz




2° | Vertical | 850 MHz




4° | Vertical | 850 MHz




6° | Vertical | 850 MHz




8° | Vertical | 750 MHz



10° | Vertical | 750 MHz



8° | Vertical | 850 MHz



10° | Vertical | 850 MHz

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.