


6	5	4	3	2		1	
	REVISIONS						
		REV.	DESCRIPTION	ECN	DATE	REV'D BY	
							H
ion Instruc	tions)						
0004							
0P01							
	NNA POLE MO				6		G
of these	instructions is to	be included i	n each mounting ki	t box at mani	Ifacture	r)	
ahten 1/2'	" hardware to 37	ft lbs (50 Nm)	torque unless othe	rwise stated			
9							
n bracket adapter (7) to mounting brackets of antenna using provided 1/2" Hex							
		\frown	\bigcirc				
p Screws $\begin{pmatrix} 6 \end{pmatrix}$, Lock Washers $\begin{pmatrix} 2 \end{pmatrix}$, and Nuts $\begin{pmatrix} 5 \end{pmatrix}$.							F
	_						'
1/2" Was	hers (1) throug	1h 9" bolt (8)	and place through	pipe grip 3).		
antonna	to ning Attach ro	ar nino arine	(4) to 9" bolt (8)	in oach assou	mbly usi	20	
antenna				iii eacii assei	nbiy usi	ng	
k Washer	rs (2) and Nuts \cdot	(5).					E
	\smile						
1/2" nuts	5 attaching re	ear nine orin (4) and 9" bolt (8)) to 28 ft lbs	(38 Nm))	
			\bigcirc		. ,		$\left \right $
	vertignten. EXCe	ssive torque l	oading will distort p	pipe grip com	ponents	5 _	

4. Make all electrical connections and weatherproof with selfamalgamating tape.

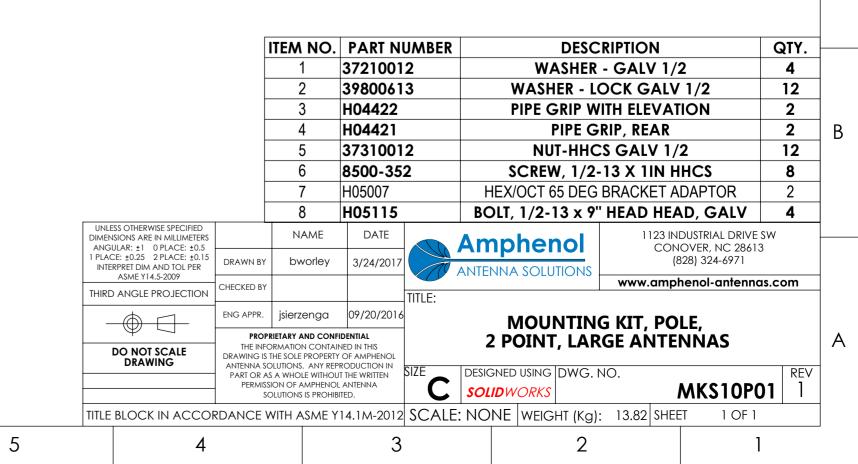

D

С