


P1-B3L15-N0

Features

- 2 ports / 1 cross pol system in low band (690-960 MHz)
- 6 ports / 3 cross pol systems in high band (1695-2690 MHz)
- Integrated and field replaceable SRET
- ACU HW version: HRLS200608H1.00
- Compliant with AISG v2.0 and 3GPP

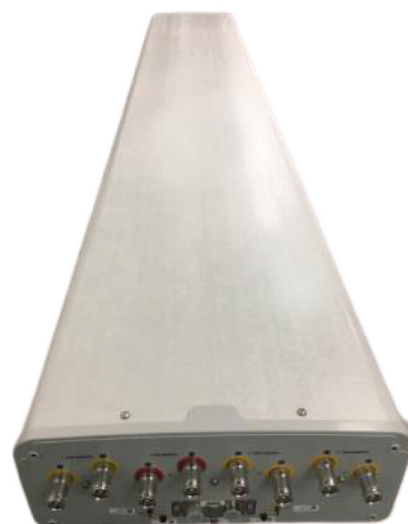

PRODUCT OVERVIEW	Frequency Range (MHz)	(1x) 690-960	(3x) 1695-2690		
	Array	<div><div></div> R1</div>	<div><div></div> Y1</div>	<div><div></div> Y2</div>	<div><div></div> Y3</div>
	Connector	1-2	3-4	5-6	7-8
		8 PORTS			
	Polarization	XPOL			
	Azimuth Beamwidth (avg)	65°	65°		
	Electrical Downtilt	2-12°	2-12°		
	Dimensions	1498 x 398 x 158 mm (59.0 x 15.7 x 6.2 in)			

ORDERING OPTIONS Select from the following ordering options

ANTENNA MODEL NUMBER	CONFIGURATION	MOUNTING HARDWARE	MOUNTING PIPE DIAMETER	SHIPPING WEIGHT
P1-B3L15-N0	ACU-I20-H14 Internal RET Included	APM50-H1 Beam Tilt Kit Included	50-125 mm (2.0-4.9 in)	28.5 kg (62.8 lbs)

P1-B3L15-N0

ELECTRICAL SPECIFICATIONS

■ R1

Frequency Range		MHz	690-960		
		MHz	690-806	790-894	880-960
Polarization		---	±45°		
Gain	Over all Tilts	dBi	14.2 ± 0.5	14.6 ± 0.5	14.9 ± 0.5
	Max Gain	dBi	14.7	15.1	15.4
Azimuth Beamwidth (3 dB)		degrees	68.8° ± 1.5°	66.8° ± 1.6°	63.8° ± 2.3°
Elevation Beamwidth (3 dB)		degrees	15° ± 1°	13.5° ± 0.5°	12.5° ± 1°
Electrical Downtilt		degrees	2-12°		
Impedance		Ohms	50Ω		
VSWR (Return Loss)		---	1.5:1 (-14 dB)		
Passive Intermodulation		dBc	-153 (3rd Order for 2x20 W Carriers)		
Front-to-Back Ratio, Total Power, ± 30°		dB	23	23	22
First Upper Side Lobe Suppression		dB	16	18.6	18
Cross Polar Discrimination Over Sector		dB	8.7	8	6.9
Cross Polar Discrimination (XPD) at Mechanical Boresight (0°)		dB	23	25.7	26.9
Maximum Effective Power Per Port		Watts	200 W		
Cross Polar Isolation		dB	28		
Interband Isolation		dB	28		

Specifications follow BASTA guidelines.

ELECTRICAL SPECIFICATIONS

■ Y1

Frequency Range		MHz	1695-2690				
		MHz	1695-1880	1850-1990	1920-2170	2300-2400	2490-2690
Polarization		---	±45°				
Gain	Over all Tilts	dBi	16.1 ± 0.5	16.6 ± 0.5	16.8 ± 0.5	17.1 ± 0.4	17.6 ± 0.5
	Max Gain	dBi	16.6	17.1	17.3	17.5	18.1
Azimuth Beamwidth (3 dB)		degrees	67.6° ± 4.9°	69° ± 1.8°	67.5° ± 2.9°	61.5° ± 1.5°	58.9° ± 4.2°
Elevation Beamwidth (3 dB)		degrees	6.7° ± 0.5°	6.1° ± 0.4°	5.8° ± 0.5°	5° ± 0.1°	5° ± 0.1°
Electrical Downtilt		degrees	2-12°				
Impedance		Ohms	50Ω				
VSWR (Return Loss)		---	1.5:1 (-14 dB)				
Passive Intermodulation		dBc	-153 (3rd Order for 2x20 W Carriers)				
Front-to-Back Ratio, Total Power, ± 30°		dB	25	26.8	27	26.1	23
First Upper Side Lobe Suppression		dB	19	18.7	17.3	20	19
Cross Polar Discrimination Over Sector		dB	12	11	10	12	6
Cross Polar Discrimination (XPD) at Mechanical Boresight (0°)		dB	29	27.8	26.6	24	22.9
Maximum Effective Power Per Port		Watts	200 W				
Cross Polar Isolation		dB	28				
Interband Isolation		dB	28				

Specifications follow BASTA guidelines.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

P1-B3L15-N0

ELECTRICAL SPECIFICATIONS

■ Y2

Frequency Range		MHz	1695-2690				
		MHz	1695-1880	1850-1990	1920-2170	2300-2400	2490-2690
Polarization		---	±45°				
Gain	Over all Tilts	dBi	15.9 ± 0.5	16.6 ± 0.5	16.9 ± 1.0	17 ± 0.9	17 ± 1
	Max Gain	dBi	16.4	17.1	17.9	17.9	18
Azimuth Beamwidth (3 dB)		degrees	61.5° ± 2.4°	60.5° ± 2°	59.9° ± 3.2°	55.8° ± 3.4°	59° ± 4.3°
Elevation Beamwidth (3 dB)		degrees	7.5° ± 0.5°	6.7° ± 0.5°	6.3° ± 0.5°	5.4° ± 0.5°	5° ± 0.1°
Electrical Downtilt		degrees	2-12°				
Impedance		Ohms	50Ω				
VSWR (Return Loss)		---	1.5:1 (-14 dB)				
Passive Intermodulation		dBc	-153 (3rd Order for 2x20 W Carriers)				
Front-to-Back Ratio, Total Power, ± 30°		dB	23	24	24	25	23
First Upper Side Lobe Suppression		dB	15	16	16	19.5	17.5
Cross Polar Discrimination Over Sector		dB	4.3	6	5	0.9	1
Cross Polar Discrimination (XPD) at Mechanical Boresight (0°)		dB	21	21	20.8	19.2	19
Maximum Effective Power Per Port		Watts	200 W				
Cross Polar Isolation		dB	28				
Interband Isolation		dB	28				

Specifications follow BASTA guidelines.

ELECTRICAL SPECIFICATIONS

■ Y3


Frequency Range		MHz	1695-2690				
		MHz	1695-1880	1850-1990	1920-2170	2300-2400	2490-2690
Polarization		---	±45°				
Gain	Over all Tilts	dBi	16.4 ± 0.5	16.9 ± 0.5	16.9 ± 0.5	17.1 ± 0.1	17.6 ± 0.5
	Max Gain	dBi	16.9	17.4	17.4	17.2	18.1
Azimuth Beamwidth (3 dB)		degrees	68.4° ± 4.3°	68.1° ± 2.1°	66.7° ± 2.6°	62° ± 2°	59.6° ± 4.5°
Elevation Beamwidth (3 dB)		degrees	6.7° ± 0.5°	6.1° ± 0.1°	5.9° ± 0.5°	5° ± 0.1°	5° ± 0.1°
Electrical Downtilt		degrees	2-12°				
Impedance		Ohms	50Ω				
VSWR (Return Loss)		---	1.5:1 (-14 dB)				
Passive Intermodulation		dBc	-153 (3rd Order for 2x20 W Carriers)				
Front-to-Back Ratio, Total Power, ± 30°		dB	24	26	26.7	26	22
First Upper Side Lobe Suppression		dB	17	17.4	16	20	20
Cross Polar Discrimination Over Sector		dB	9	9	8.7	13	4.2
Cross Polar Discrimination (XPD) at Mechanical Boresight (0°)		dB	27.7	30.6	28	25	26.2
Maximum Effective Power Per Port		Watts	200 W				
Cross Polar Isolation		dB	28				
Interband Isolation		dB	28				

Specifications follow BASTA guidelines.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.


P1-B3L15-N0

BOTTOM VIEW - LABELING

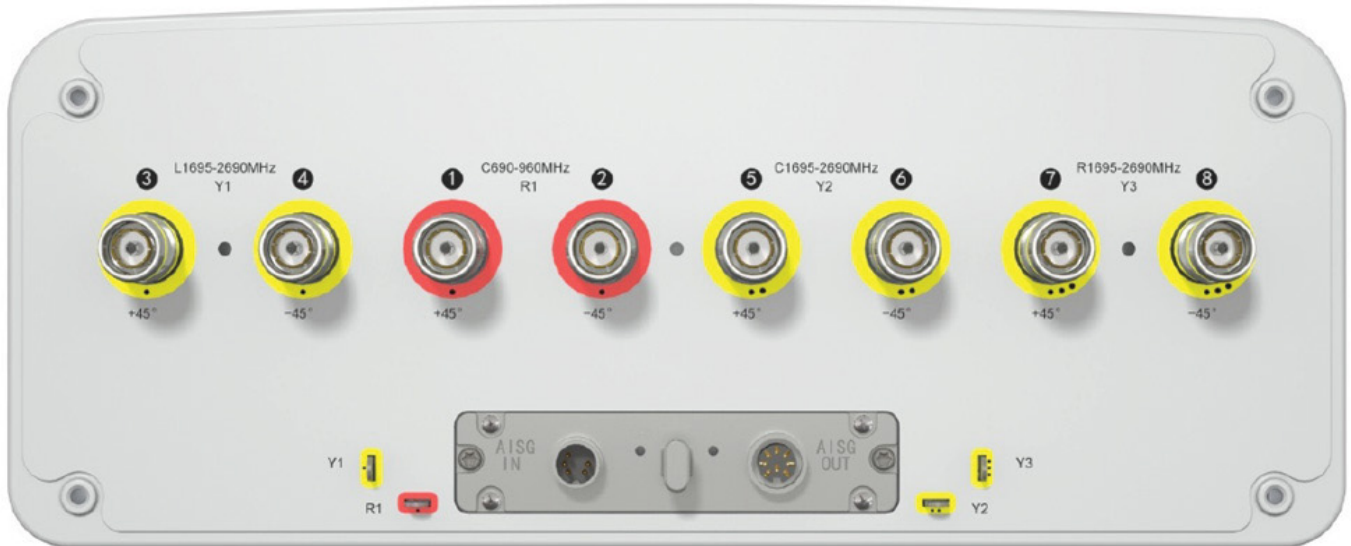

ARRAY LAYOUT

ARRAY	FREQUENCY	CONNECTOR	CONNECTOR TYPE	RET	AISG RET UID
■ R1	690-960 MHz	1-2	(2x) 4.3-10 Female	R1	RFxxxxxxxxxx-R1
■ Y1	1695-2690 MHz	3-4	(2x) 4.3-10 Female	Y1	RFxxxxxxxxxx-Y1
■ Y2	1695-2690 MHz	5-6	(2x) 4.3-10 Female	Y2	RFxxxxxxxxxx-Y2
■ Y3	1695-2690 MHz	7-8	(2x) 4.3-10 Female	Y3	RFxxxxxxxxxx-Y3

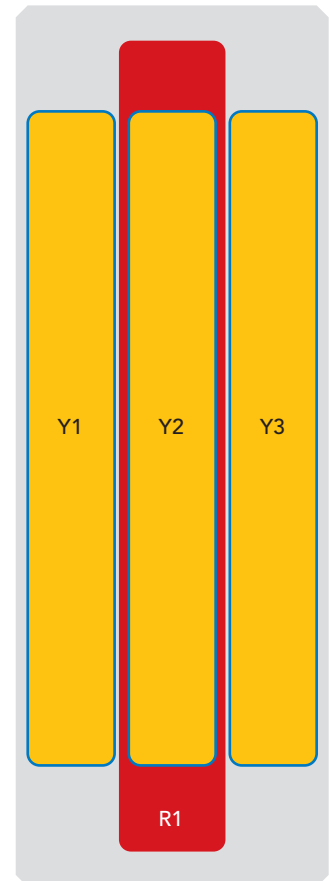

The illustration is not shown to scale.

P1-B3L15-N0

MECHANICAL SPECIFICATIONS

Length		mm (in)	1498 (59)
Width		mm (in)	398 (15.7)
Depth		mm (in)	158 (6.2)
Net Weight - Antenna Only		kg (lbs)	21 (46.3)
Net Weight - Mounting Hardware Only		kg (lbs)	4 (8.8)
Wind Load Rated at 150 km/h (93 mph)	Front	N (lbf)	550 (124)
	Side	N (lbf)	270 (61)
	Rear	N (lbf)	615 (138)
Survival Wind Speed / Rated Wind Speed		km/h (mph)	200 (150)
Connector Type		--	(8x) 4.3-10 Female, (2x) AISG Connectors (1 Male, 1 Female) at Bottom
Radome Color		---	Light Grey RAL7035
Radome Material		---	Fiberglass
Lightning Protection		---	DC Ground
Shipping	Packing Size (Length x Width x Depth)	mm (in)	1678 x 493 x 278 (66.1 x 19.4 x 10.9)
	Shipping Weight	kg (lbs)	28.5 (62.8)

ENVIRONMENTAL SPECIFICATIONS


Environmental Standard	---	ETS 300 019
Operating Temperature	degrees	-40° to +60° C (-40° to +140° F)
Product Environmental Compliance	---	Product is RoHS Compliant

P1-B3L15-N0

ACCESSORIES Accessories may be ordered separately unless otherwise indicated.


ITEM	MODEL NUMBER	WEIGHT
Beam Tilt Mounting Bracket Kit for Pole Diameter 50-125 mm (2.0-4.9 in) <i>Shipped with antenna</i>	APM50-H1	4 kg (8.8 lbs)

INSTALLATION Please read all installation notes before installing product.

	Always attach the antenna using all mounting points.
	Do not install antenna with the connectors facing upwards.

EXTERNAL DOCUMENT LINKS

[APM50 Mounting Kit Series Installation Instructions](#)

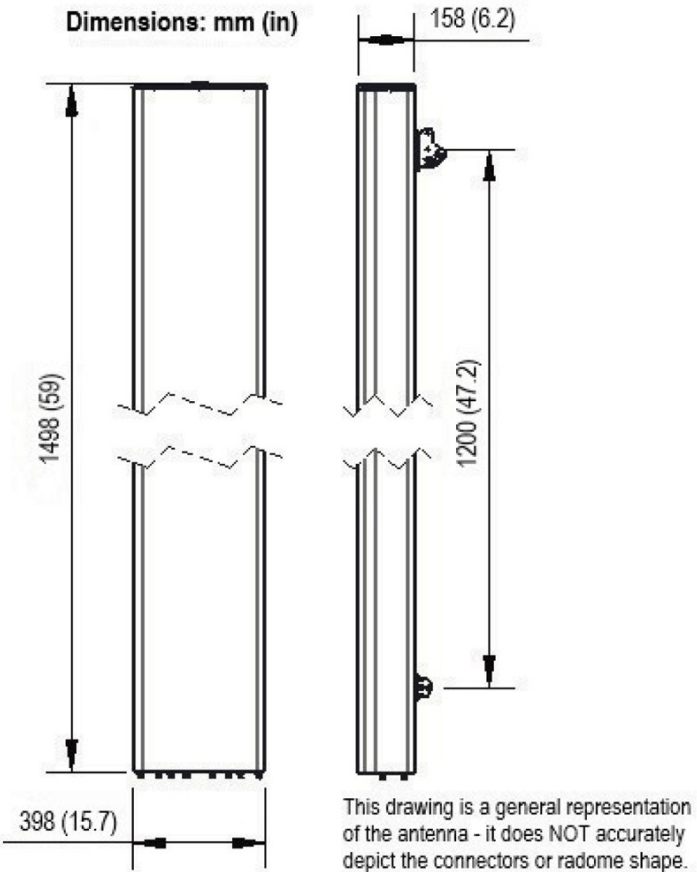

NOTES

- Specifications follow BASTA guidelines.
- For additional mounting information, please check **External Document Links**.
- For Radiating Patterns: [Request pattern files](#)