


P4-BBUULL15-J0

P4-BBUULL15-J0N, P4-BBUULL15-I0, P4-BBUULL15-I0N

Features

- 4 ports / 2 cross pol systems in low band (694-960 MHz)
- 4 ports / 2 cross pol systems in mid band (1695-2690 MHz)
- 4 ports / 2 cross pol systems in very wide mid band (1427-2690 MHz)
- Integrated and field replaceable SRET
- Optional with Site Sharing feature (Model name suffix -I0, -I0N)
- Optional with Direct Pipe No Tilt mounting hardware (Model name suffix -J0N, -I0N)
- Compliant with AISG v2.0 and 3GPP

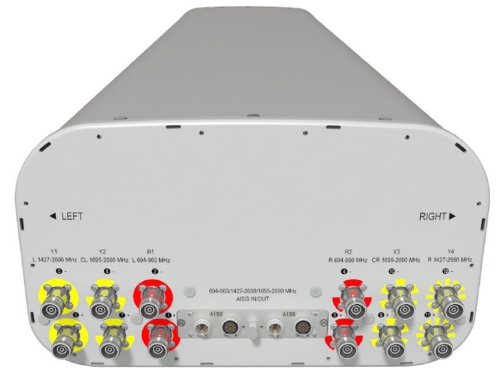

PRODUCT OVERVIEW	Frequency Range (MHz)	(2x) 694-960		(2x) 1427-2690		(2x) 1695-2690	
	Array	■ R1	■ R2	■ Y1	■ Y4	■ Y2	■ Y3
	Connector	1-2	3-4	5-6	11-12	7-8	9-10
		12 PORTS					
	Polarization	XPOL					
	Azimuth Beamwidth (avg)	65°		65°		65°	
	Electrical Downtilt	2-14°		2-12°		2-12°	
Dimensions	1503 x 430 x 245 mm (59.2 x 16.9 x 9.6 in)						

ORDERING OPTIONS Select from the following ordering options

ANTENNA MODEL NUMBER	CONFIGURATION	MOUNTING HARDWARE	MOUNTING PIPE DIAMETER	SHIPPING WEIGHT	MOUNTING HARDWARE WEIGHT
P4-BBUULL15-J0	ACU-X20N Internal RET Included	APM40-2 Beam Tilt Kit Included	60-120 mm (2.4-4.7 in)	36.0 kg (79.4 lbs)	3.9 kg (8.6 lbs)
P4-BBUULL15-J0N	ACU-X20N Internal RET Included	APM40-1 Direct Pipe No Tilt Mounting Kit Included	60-120 mm (2.4-4.7 in)	35.3 kg (77.8 lbs)	3.2 kg (7.0 lbs)
P4-BBUULL15-I0	ACU-X20 Internal RET for Site Sharing Included	APM40-2 Beam Tilt Kit Included	60-120 mm (2.4-4.7 in)	36.0 kg (79.4 lbs)	3.9 kg (8.6 lbs)
P4-BBUULL15-I0N	ACU-X20 Internal RET for Site Sharing Included	APM40-1 Direct Pipe No Tilt Mounting Kit Included	60-120 mm (2.4-4.7 in)	35.3 kg (77.8 lbs)	3.2 kg (7.0 lbs)



Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

P4-BBUULL15-J0

P4-BBUULL15-J0N, P4-BBUULL15-I0, P4-BBUULL15-I0N

ELECTRICAL SPECIFICATIONS

■ R1

Frequency Range		MHz	694-960		
		MHz	694-806	790-894	880-960
Polarization		---	±45°		
Gain	Over all Tilts	dBi	13.5 ± 0.6	13.9 ± 0.7	14.5 ± 0.4
	Max Gain	dBi	14.1	14.6	14.9
Azimuth Beamwidth (3 dB)		degrees	67.3° ± 11.6°	60.8° ± 9.8°	58.7° ± 5.4°
Elevation Beamwidth (3 dB)		degrees	15.3° ± 0.9°	13.9° ± 1.1°	12.7° ± 0.5°
Electrical Downtilt		degrees	2-14°		
Impedance		Ohms	50Ω		
VSWR (Return Loss)		---	1.5:1 (-14 dB)		
Passive Intermodulation 3rd Order, 2x43dBm		dBc	-153		
Front-to-Back Ratio, Total Power, ± 30°		dB	21.1	20.2	21
First Upper Side Lobe Suppression		dB	13.6	12.7	12.8
Cross Polar Discrimination Over Sector		dB	4.6	4.7	2.6
Cross Polar Discrimination (XPD) at Mechanical Boresight (0°)		dB	15.7	16.6	18.9
Maximum Effective Power Per Port		Watts	250 W		
Cross Polar Isolation		dB	25		
Interband Isolation		dB	25		

Specifications follow BASTA guidelines.

ELECTRICAL SPECIFICATIONS

■ R2

Frequency Range		MHz	694-960		
		MHz	694-806	790-894	880-960
Polarization		---	±45°		
Gain	Over all Tilts	dBi	13.9 ± 0.5	14.1 ± 0.7	14.7 ± 0.3
	Max Gain	dBi	14.4	14.8	15
Azimuth Beamwidth (3 dB)		degrees	66.5° ± 8.0°	62.2° ± 7.6°	59.0° ± 3.6°
Elevation Beamwidth (3 dB)		degrees	14.7° ± 1.0°	13.5° ± 0.9°	12.5° ± 0.6°
Electrical Downtilt		degrees	2-14°		
Impedance		Ohms	50Ω		
VSWR (Return Loss)		---	1.5:1 (-14 dB)		
Passive Intermodulation 3rd Order, 2x43dBm		dBc	-153		
Front-to-Back Ratio, Total Power, ± 30°		dB	21.3	20.5	20.7
First Upper Side Lobe Suppression		dB	13.3	13.5	14.0
Cross Polar Discrimination Over Sector		dB	4.1	5.5	3.6
Cross Polar Discrimination (XPD) at Mechanical Boresight (0°)		dB	15.9	17.2	20.3
Maximum Effective Power Per Port		Watts	250 W		
Cross Polar Isolation		dB	25		
Interband Isolation		dB	25		

Specifications follow BASTA guidelines.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

P4-BBUULL15-J0

P4-BBUULL15-J0N, P4-BBUULL15-I0, P4-BBUULL15-I0N

ELECTRICAL SPECIFICATIONS

■ Y1

Frequency Range		MHz	1427-2690					
		MHz	1427-1518	1695-1880	1850-1990	1920-2170	2300-2400	2490-2690
Polarization		---	±45°					
Gain	Over all Tilts	dBi	15.1 ± 0.9	16.4 ± 0.9	17.1 ± 0.4	17.5 ± 0.8	17.9 ± 0.5	18.1 ± 0.6
	Max Gain	dBi	16.0	17.3	17.5	18.3	18.4	18.7
Azimuth Beamwidth (3 dB)		degrees	74.3° ± 8.2°	67.6° ± 6.8°	67.6° ± 3.9°	63.5° ± 6.8°	57.8° ± 4.0°	56.3° ± 6.0°
Elevation Beamwidth (3 dB)		degrees	7.8° ± 0.6°	7.0° ± 0.5°	6.4° ± 0.5°	5.9° ± 0.6°	5.2° ± 0.2°	4.8° ± 0.3°
Electrical Downtilt		degrees	2-12°					
Impedance		Ohms	50Ω					
VSWR (Return Loss)		---	1.5:1 (-14 dB)					
Passive Intermodulation 3rd Order, 2x43dBm		dBc	-153					
Front-to-Back Ratio, Total Power, ± 30°		dB	19.3	21.2	21.1	19.6	20.7	20.5
First Upper Side Lobe Suppression		dB	17.1	16.2	16.5	16.4	19.8	18.4
Cross Polar Discrimination Over Sector		dB	10.2	5.3	5.5	5.4	1.4	0.5
Cross Polar Discrimination (XPD) at Mechanical Boresight (0°)		dB	19.2	22.4	21.7	20.1	20	17.8
Maximum Effective Power Per Port		Watts	250 W					
Cross Polar Isolation		dB	25					
Interband Isolation		dB	25					

Specifications follow BASTA guidelines.

ELECTRICAL SPECIFICATIONS

■ Y2

Frequency Range		MHz	1695-2690				
		MHz	1695-1880	1850-1990	1920-2170	2300-2400	2490-2690
Polarization		---	±45°				
Gain	Over all Tilts	dBi	15.7 ± 0.7	16.6 ± 0.5	17.2 ± 0.8	17.4 ± 0.5	17.4 ± 0.7
	Max Gain	dBi	16.4	17.1	18.0	17.9	18.1
Azimuth Beamwidth (3 dB)		degrees	77.6° ± 7.1°	74.3° ± 9.0°	65.7° ± 13.2°	69.1° ± 5.5°	68.4° ± 6.2°
Elevation Beamwidth (3 dB)		degrees	7.0° ± 0.6°	6.4° ± 0.5°	5.9° ± 0.6°	5.1° ± 0.3°	4.8° ± 0.3°
Electrical Downtilt		degrees	2-12°				
Impedance		Ohms	50Ω				
VSWR (Return Loss)		---	1.5:1 (-14 dB)				
Passive Intermodulation 3rd Order, 2x43dBm		dBc	-153				
Front-to-Back Ratio, Total Power, ± 30°		dB	21.4	22.1	20.6	23.1	23.3
First Upper Side Lobe Suppression		dB	17.4	19	19.6	22.7	15.9
Cross Polar Discrimination Over Sector		dB	5.4	5.7	5.5	2.5	0.9
Cross Polar Discrimination (XPD) at Mechanical Boresight (0°)		dB	18.5	18.5	20.5	20.7	20
Maximum Effective Power Per Port		Watts	250 W				
Cross Polar Isolation		dB	25				
Interband Isolation		dB	25				

Specifications follow BASTA guidelines.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

65°

1503 mm

INTEGRATED RET

SITE SHARING OPTIONAL

P4-BBUULL15-J0

P4-BBUULL15-J0N, P4-BBUULL15-I0, P4-BBUULL15-I0N

ELECTRICAL SPECIFICATIONS

■ Y3

Frequency Range		MHz	1427-2690				
		MHz	1695-1880	1850-1990	1920-2170	2300-2400	2490-2690
Polarization		---	±45°				
Gain	Over all Tilts	dBi	16.1 ± 0.1	16.7 ± 0.6	17.2 ± 0.8	17.6 ± 0.4	17.6 ± 0.6
	Max Gain	dBi	16.2	17.3	18	18	18.2
Azimuth Beamwidth (3 dB)		degrees	73.1° ± 15.0°	71.1° ± 14.2°	67.9° ± 14.2°	69.4° ± 5.7°	68.9° ± 8.1°
Elevation Beamwidth (3 dB)		degrees	6.9° ± 0.6°	6.4° ± 0.4°	5.9° ± 0.6°	5.1° ± 0.3°	4.8° ± 0.3°
Electrical Downtilt		degrees	2-12°				
Impedance		Ohms	50Ω				
VSWR (Return Loss)		---	1.5:1 (-14 dB)				
Passive Intermodulation 3rd Order, 2x43dBm		dBc	-153				
Front-to-Back Ratio, Total Power, ± 30°		dB	20.2	22.1	20.9	23.1	22.2
First Upper Side Lobe Suppression		dB	18	18.3	16.6	21	21.3
Cross Polar Discrimination Over Sector		dB	3.7	4.9	5.8	1.4	0.8
Cross Polar Discrimination (XPD) at Mechanical Boresight (0°)		dB	19.8	20.6	22	20.2	18.8
Maximum Effective Power Per Port		Watts	250 W				
Cross Polar Isolation		dB	25				
Interband Isolation		dB	25				

Specifications follow BASTA guidelines.

ELECTRICAL SPECIFICATIONS

■ Y4

Frequency Range		MHz	1427-2690					
		MHz	1427-1518	1695-1880	1850-1990	1920-2170	2300-2400	2490-2690
Polarization		---	±45°					
Gain	Over all Tilts	dBi	14.8 ± 0.6	16.3 ± 0.9	17.1 ± 0.4	17.5 ± 0.7	18.0 ± 0.4	18.1 ± 0.4
	Max Gain	dBi	15.4	17.2	17.5	18.2	18.4	18.5
Azimuth Beamwidth (3 dB)		degrees	73.0° ± 8.2°	69.3° ± 6.0°	68.2° ± 4.8°	63.7° ± 6.7°	58.3° ± 4.4°	56.5° ± 5.4°
Elevation Beamwidth (3 dB)		degrees	7.7° ± 0.5°	6.8° ± 0.4°	6.4° ± 0.3°	5.9° ± 0.6°	5.2° ± 0.3°	4.8° ± 0.3°
Electrical Downtilt		degrees	2-12°					
Impedance		Ohms	50Ω					
VSWR (Return Loss)		---	1.5:1 (-14 dB)					
Passive Intermodulation 3rd Order, 2x43dBm		dBc	-153					
Front-to-Back Ratio, Total Power, ± 30°		dB	18.5	19.8	20.6	19.7	20.1	17.9
First Upper Side Lobe Suppression		dB	9	17.3	21.1	19.1	23.4	20.1
Cross Polar Discrimination Over Sector		dB	8.7	6.6	6.8	6.1	1	0.3
Cross Polar Discrimination (XPD) at Mechanical Boresight (0°)		dB	17.1	19.1	20.5	21.2	19.7	20.1
Maximum Effective Power Per Port		Watts	250 W					
Cross Polar Isolation		dB	25					
Interband Isolation		dB	25					


Specifications follow BASTA guidelines.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

P4-BBUULL15-J0

P4-BBUULL15-J0N, P4-BBUULL15-I0, P4-BBUULL15-I0N


BOTTOM VIEW - LABELING

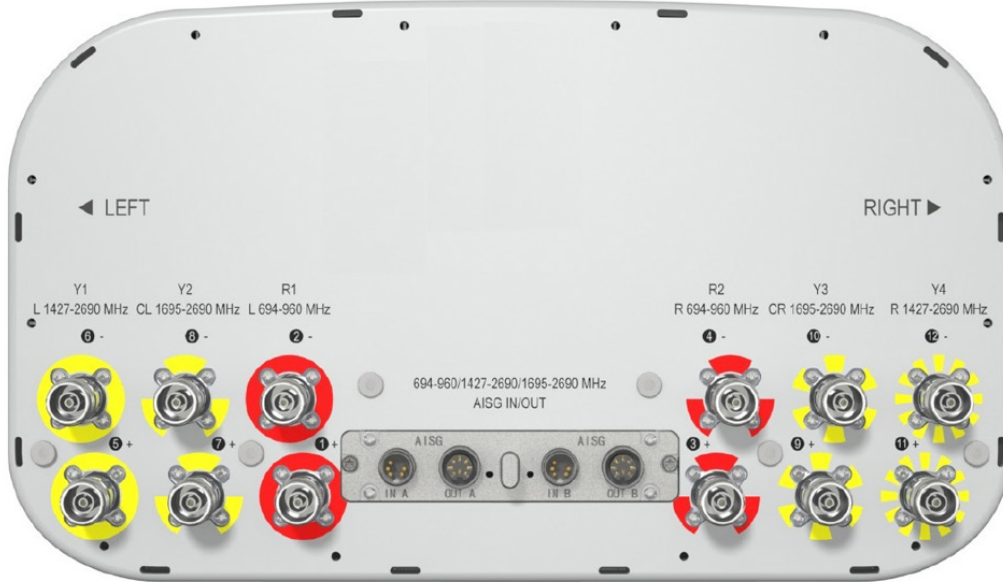

ARRAY LAYOUT

ARRAY	FREQUENCY	CONNECTOR	CONNECTOR TYPE	RET	AISG RET UID
■ R1	694-960 MHz	1-2	(2x) 4.3-10 Female	R1	RFxxxxxxxxxx-R1
■ R2	694-960 MHz	3-4	(2x) 4.3-10 Female	R2	RFxxxxxxxxxx-R2
■ Y1	1427-2690 MHz	5-6	(2x) 4.3-10 Female	Y1	RFxxxxxxxxxx-Y1
■ Y2	1695-2690 MHz	7-8	(2x) 4.3-10 Female	Y2	RFxxxxxxxxxx-Y2
■ Y3	1695-2690 MHz	9-10	(2x) 4.3-10 Female	Y3	RFxxxxxxxxxx-Y3
■ Y4	1427-2690 MHz	11-12	(2x) 4.3-10 Female	Y4	RFxxxxxxxxxx-Y4

NOTE: RET motors will tilt one at a time, not simultaneously

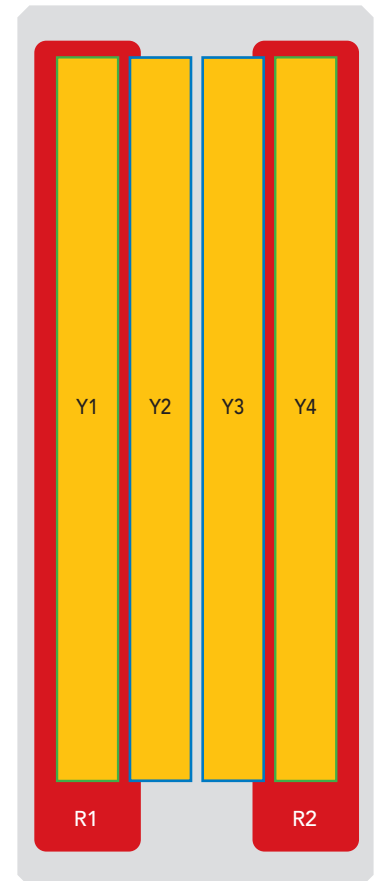

The illustration is not shown to scale.

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

65°

1503 mm

INTEGRATED RET

SITE SHARING OPTIONAL

P4-BBUULL15-J0

P4-BBUULL15-J0N, P4-BBUULL15-I0, P4-BBUULL15-I0N

MECHANICAL SPECIFICATIONS

Length	mm (in)	1503 (59.2)
Width	mm (in)	430 (16.9)
Depth	mm (in)	245 (9.6)
Net Weight - Antenna Only	kg (lbs)	26 (57.3)
Wind Load Rated at 150 km/h (93 mph)	Front, Resultant	N (lbf) 317 (71)
	Side, Resultant	N (lbf) 402 (90)
	Rear, Resultant	N (lbf) 402 (90)
	Maximum, Resultant	N (lbf) 643 (145)
Survival Wind Speed	km/h (mph)	240 (149)
Connector Type	--	(12x) 4.3-10 Female, (2x) AISG Connectors (1 Male, 1 Female) at Bottom Site Sharing: (4x) AISG Connectors (2 Male, 2 Female) at Bottom
Radome Color	---	Light Grey RAL7035
Radome Material	---	Fiberglass
Lightning Protection	---	DC Ground
Shipping	Packing Size (Length x Width x Depth)	mm (in) 1725 x 540 x 368 (67.9 x 21.3 x 14.5)

ENVIRONMENTAL SPECIFICATIONS

Environmental Standard	---	ETS 300 019
Operating Temperature	degrees	-40° to +60° C (-40° to +140° F)
Product Environmental Compliance	---	Product is RoHS Compliant

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

P4-BBUULL15-J0

P4-BBUULL15-J0N, P4-BBUULL15-I0, P4-BBUULL15-I0N

ACCESSORIES

Accessories may be ordered separately unless otherwise indicated.

ITEM	MODEL NUMBER	WEIGHT
Beam Tilt Mounting Bracket Kit for Pole Diameter 60-120 mm (2.4-4.7 in) <i>Refer to ordering options</i>	APM40-2	3.9 kg (8.6 lbs)
Direct Pipe No Tilt Bracket Kit for Pole Diameter 60-120 mm (2.4-4.7 in) <i>Refer to ordering options</i>	APM40-1	3.2 kg (7.0 lbs)

INSTALLATION

Please read all installation notes before installing product.




Always attach the antenna using all mounting points.

Do not install antenna with the connectors facing upwards.

EXTERNAL DOCUMENT LINKS

[APM40 Mounting Kit Series Installation Instructions](#)

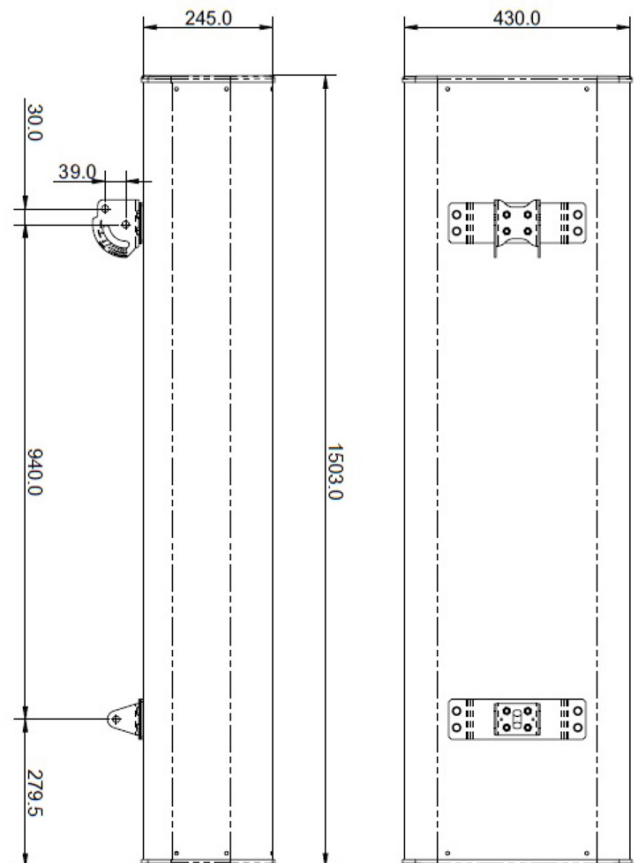

NOTES

Specifications follow BASTA guidelines.

For additional mounting information, please check **External Document Links**.

For Radiating Patterns: [Request pattern files](#)